

HP PageWide Web Press Portfolio at a glance



Front

* Default Unwind Module (4W) and Rewind Module (4R) support 205 m (671 mm) applications. Support for 225 m (707 mm) applications requires 4W225C upgrade module and 4R225C2 upgrade module.
 † Customer application specific testing advised for media between 40-400 gsm and 300-350 gsm.
 ‡ Basic configuration supports 40 to 350 gsm. Customer application specific testing advised for media between 40-400 gsm and 300-350 gsm.
 § Dimensions are for configuration with expanded dryer without optional rewinder attached. The following are dimensions with optional rewinder and optional additional access walkover: 3.15 x 21.82 x 3 m (104 x 699 x 119 ft). Dimensions vary by configuration and options selected.
 ¶ Performance mode delivers similar print quality as the HP PageWide Web Press T400 and T410 using a single drop weight and "vectorized" of 1.3 mm droplet.
 †† Quality mode delivers the highest quality using dual drop weight nozzle using "tipless" row (vary by monochrome).
 ††† Dimensions are for configuration with standard unwind without optional rewinder attached. The following are dimensions with optional rewinder and optional additional access walkover: 6.4 x 21.7 x 3.6 m (21 x 69 x 120 ft). Dimensions vary by configuration and options selected. Additional space may be required for clearance, maintenance and roll operations.

© Copyright 2016 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.



Back

Cross portfolio specifications


| | |
|-------------------------------|---|
| Native resolution | 1200 nozzles per inch 2400 nozzles per inch for HDNA technology in Quality mode |
| Media range | T200 series: 40 to 275 gsm, 30-to 140-lb text, 80-lb cover† T300 HD series, T400 HD series: 40 to 350 gsm, 30-lb text to 130-lb cover† |
| Media type | Uncoated offset with HP bonding agent Coated offset with optional HP priming agent |
| Printable frame length | T200 HD series, T260M: 216 to 1829 mm (8.5 to 72 in) T300 HD series, T400 HD series: 216 to 2743 mm (8.5 to 108 in) |
| Ink | Water-based HP pigment inks and Bonding Agent ink Color press models: CMYK Mono (M) press models: black only |
| Media handling | Tight web continuous roll feed |
| Dimensions (W x L x H) | T200 series: 3 x 11.6 x 2.7 m (117 x 485 x 107 in)† T300 HD series: 3.15 x 19 x 3 m (104 x 748 x 119 in)† T400 HD series: 6.4 x 17.6 x 3.6 m (214 x 693 x 132 in)†† |

| | HP PageWide Web Press T240 HD | HP PageWide Web Press T235 HD | HP PageWide Web Press T250M |
|-----------------------|--|--|--|
| Max speed | Performance mode - 152 m (500 ft) per minute Quality mode - 76 m (250 ft) per minute | Performance mode - 122 m (400 ft) per minute Quality mode - 61 m (200 ft) per minute | 244 m (800 ft) per minute |
| Max duty cycle | Performance mode - 58 million A4 images per month Quality mode - 32 million A4 images per month | Performance mode - 48 million A4 images per month Quality mode - 26 million A4 images per month | 111 million mono landscape LT size, 123 million mono landscape A4, 211 million 152 x 229 mm (6 x 9 in) pages per month |
| Printwidth | Up to 521 mm (20.5 in) | Up to 521 mm (20.5 in) | Up to 630 mm (24.8 in) |
| Mediawidth | 203 to 558 mm (8 to 22 in)† | 203 to 558 mm (8 to 22 in)† | 440 to 660 mm (15.7 to 26 in) |

First opening

Inside (open)

4AA6-9011EEW

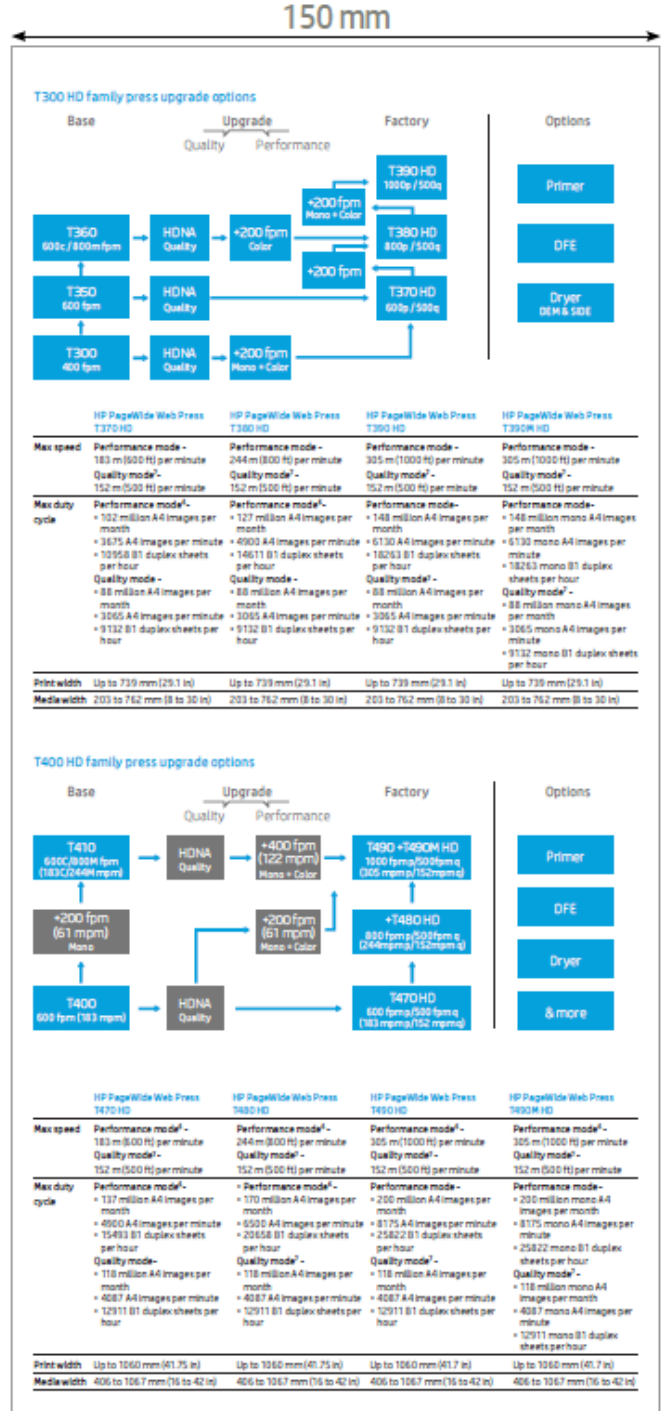

316 mm