


Data sheet

# HP HDMI Port Flex IO (400/600/800)

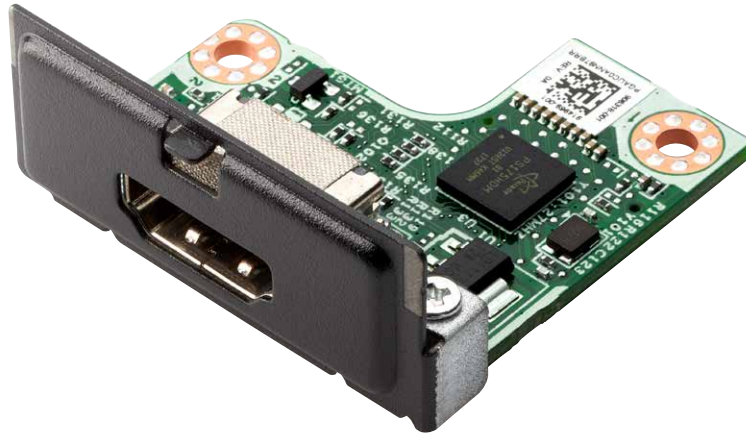


Maximize the life of your PC as your business needs change with the flexible display connectivity of the HP HDMI Port Flex IO (400/600/800).

## Specifications

### HP HDMI Port Flex IO (400/600/800)

<b>Part number</b>	3TK74AA
<b>Dimensions</b>	1.55 x 1.5 x 0.77 in (3.94 x 3.82 x 1.95 cm)
<b>Weight</b>	.02 lb (10 gr)
<b>Compatible operating systems</b>	Windows 10, Windows 8
<b>System requirements, minimum</b>	CPU: AMD AM4 A6-9500E 3.0 GHz or higher; RAM: 4 GB or higher; HDD: 128 GB or more of available space; Interface: 60 pin board to board connector ( DP 1.3)
<b>Compatibility</b>	HP EliteDesk 800 G4 TWR, HP EliteDesk 800 G4 SFF, HP EliteDesk 800 G4 DM, HP ProDesk 600 G4 MT, HP ProDesk 600 G4 SFF, HP ProDesk 600 G4 DM, HP ProDesk 400 G5 MT, HP ProDesk 400 G4 DM, HP ProDesk 400 G5 SFF.  Only one FLEX IO module can be used at a time.
<b>What is in the box?</b>	HP HDMI Port Flex IO card
<b>Country of origin</b>	China

**Sign up for updates**  
[hp.com/go/getupdated](https://hp.com/go/getupdated)



© Copyright 2018 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

