



Product Service


CERTIFICATE

No. Z1A 13 10 52878 070

Holder of Certificate: **Hewlett-Packard Company**

3000 Hanover Street
Palo Alto, California 94304
USA

Certification Mark:

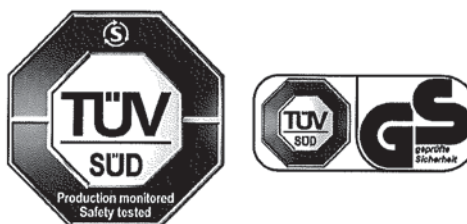

Product:

Notebook Computer

**Tested
according to:**

EN 60950-1/A12:2011
EK1-ITB 2000:2013
ZEK 01.4-08

The product meets the safety and health requirements of the German Product Safety Act section 20 to 22 ProdSG. The certification marks shown above can be affixed on the product. It is not permitted to alter the certification marks in any way. In addition the certificate holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. See also notes overleaf.

Test report no.: 612101389501

Valid until: 2018-10-23

Date, 2013-10-24

Bill Lin
(Bill Lin)



Page 1 of 3



Product Service

CERTIFICATE**No. Z1A 13 10 52878 070****Model(s):** HSTNN-I15C-5, HP ProBook 650

Parameters:

Rated input voltage:	19.5 Vdc
Rated input current:	3.33 A or 4.62 A
Protection class:	III
Max. ambient temperature:	35 °C
Degree of protection	
against ingress of liquids:	Ordinary
Sound Pressure level:	42.3 dB(A)
Declared Sound Power level:	4.8 B(A)

Remarks: 1. See attachment for LCD(s) covered by this certificate.

2. The equipment is evaluated for operating in altitude up to 3,048 m (10,000 ft) above the sea level.

Factory(ies): 65256, 75263

Page 2 of 3



Taiwan

Attachment to the Certificate

No. Z1A 13 10 52878 070

The following LCD's panel description of the models are as below:

- | | |
|-----------------------------------|------------------|
| 1. AUO | Type: B156HTN03 |
| 2. AUO | Type: B156XW04 |
| 3. Chimei Innolux (Innolux Corp.) | Type: N156HGE |
| 4. Chimei Innolux (Innolux Corp.) | Type: N156BGE |
| 5. LG Display | Type: LP156WH3 |
| 6. Samsung | Type: LTN156AT31 |
| *7. LG Display | Type: LP156WHB |
| *8. AUO | Type: B156XTN04 |

Suitable for Max. illuminance: $L_{REF,EXT} = 200 \text{ cd/m}^2$ and $L_{REF,SML} = 2000 \text{ cd/m}^2$

Suitable for Max. illuminance: 1000 lx

Pixel fault classification: I

Design viewing distance: 500 mm

Design viewing direction: (0°, 90°)

Viewing direction range: Φ range is 0° to 360°

θ range is 43.1°

Content and perception: Artificial information

Date: 2014-11-27



Testing Laboratory

Bill Lin
Bill Lin