

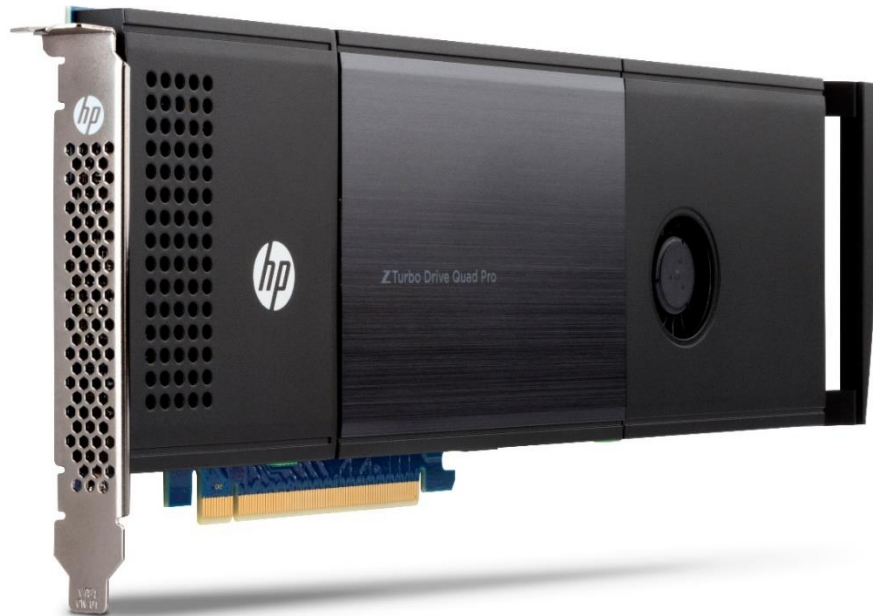


### Overview

### PCIe Solid State Drives for HP Workstations

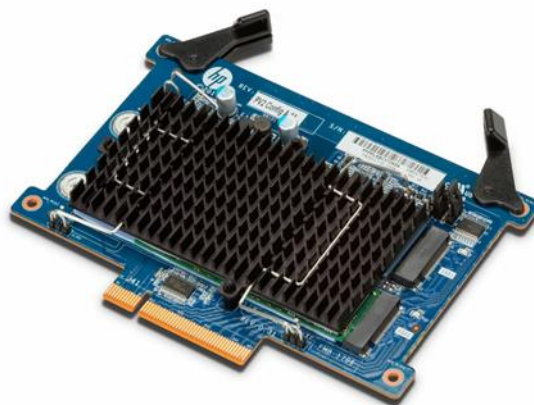

### Overview

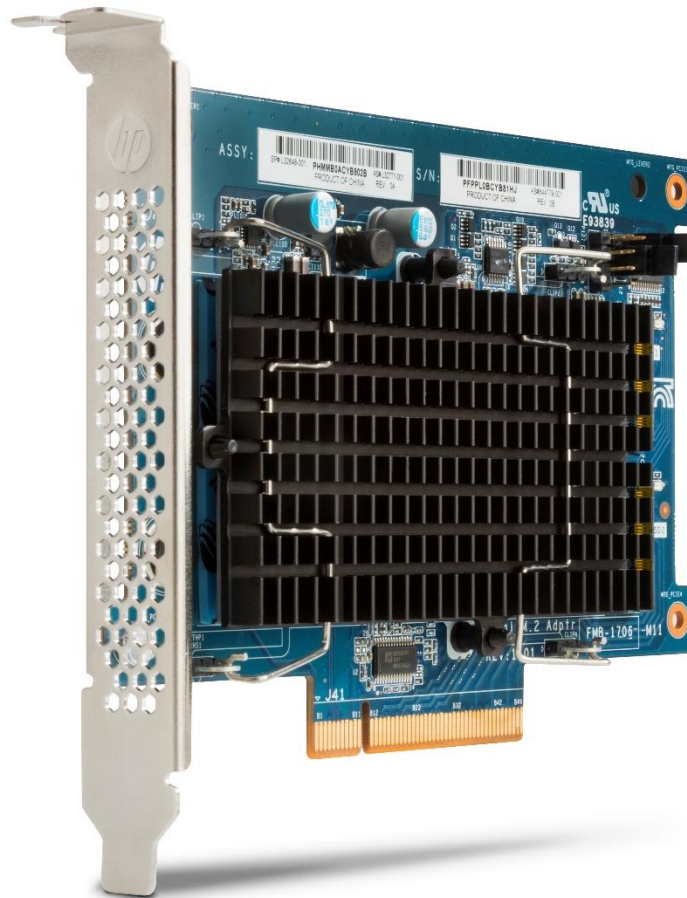

### Overview



## Introduction

Storage technology with NAND media is outgrowing the bandwidth limitations of the SATA bus. New high performance Storage solutions will connect directly to the PCIe bus for revolutionary performance improvements. These components will be available in a variety of form factors and performance levels, designed specifically for certain market segments, and ultimately the costs will continue to decline as the technology evolves.

## Performance

### HP Z Turbo Drive G2

The new HP Z Turbo Drive G2 features the next generation PCIe NVMe SSD. This M.2 form factor device uses PCIe Gen3 x4 which enables performance levels greater than 3GB/s, which is roughly 6x greater than SATA SSDs. The Random Read performance is significantly improved also, due to the NVMe controller technology used on the device. This performance is available at a price that is comparable to commercial SATA SSDs.

The HP Z Turbo Drive G2 will be supported on desktop platforms of HP Z Workstations including Z2 G4 SFF and tower, Z2 G4 Mini, Z4, Z6 and Z8 G4, Z240, Z440, Z640 and Z840. It will support storage configurations as a Boot device and as a Data device. It also can be configured with other storage components including SATA and SAS drives and controllers. Not all configurations are available from the factory.

It is also supported by our current offering of Operating Systems, including Linux, and may require a separate driver, depending on OS. It does require a BIOS update for Z440, Z640 and Z840 systems shipped prior to the Z Turbo Drive G2 launch, minimum BIOS is 1.53. Z2 G4, Z4 G4, Z6 G4, and Z8 G4 have been enabled for Z Turbo Drive G2 prior to launch, and do not require a minimum BIOS revision.

The HP Z Turbo Drive G2 comes with a custom thermal solution to keep the device within full performance operating temperatures. This solution consists of a heat sink and thermal pads to make a solid thermal connection between the heatsink and the M.2 SSD. Without adequate cooling, PCIe NVMe SSDs will throttle down their performance significantly, until the device cools off, to get back in the acceptable operating temperature range.

NVMe devices require a driver for proper detection and operation. Microsoft Windows 8 and higher have an inbox NVMe driver. For Windows 7, HP recommends the Microsoft hotfix which provides an NVMe driver (listed below). In addition, the Samsung NVMe driver, version 2.1.7.1701, can be used with specific Samsung M.2 devices. (available at [www.hp.com](http://www.hp.com)). Also note that the new NVMe driver will not support the original HP Z Turbo Drive, which requires an AHCI driver.

KB2990941 (<https://support.microsoft.com/en-us/kb/2990941>)

KB3087873 (<https://support.microsoft.com/en-us/kb/3087873>)

### Overview

#### Operating System Support

Microsoft Windows 7 64-bit, Microsoft Windows 10 64-bit, RHEL 6,7; SUSE 11,12; Ubuntu 14.04.

**Note:** Not supported for 32-bit Microsoft Windows Operating Systems.

Support for OPAL hardware encryption: No

Support for Secure Erase: Yes

Supported in HP Performance Advisor: yes (includes wear gauge)

Approved PCIe slots :

Recommended slot order for Z840

1. Slot 1
2. Slot 6
3. Slot 3 (Requires 2nd CPU)
4. Slot 4 (Requires 2nd CPU)

Z640 - Slot 4, Slot 5, Slot 3 (in order of preference)

Z440 - Slot 4, Slot 5, Slot 3 (in order of preference)

Z240 - Native Motherboard slot first, then available PCIe Gen3 slot (either #1 or #4)

Z8 G4 – Personality Slot 1 (provides support for two Z Turbo Drives), Personality Slot 2 (provides support for two Z Turbo Drives, requires 2<sup>nd</sup> CPU)

Z6 G4 – Down M.2 Slot 1, Down M.2 Slot 2

Z4 G4 – Down M.2 Slot 1, Down M.2 Slot 2

Z2 G4 – Down M.2 Slot 1, Down M.2 Slot 1

Z2 Mini G3 and G4 – Down M.2 Slot 1

For RAID support, there are some specific differences and thus restrictions as compared to SATA/SAS HDDs or SSDs. Software RAID is used, as there is not a good solution today for hardware based RAID.

- Windows RAID with Boot Configuration: Limited support for RAID 1\*, No support for RAID 0, 5, 10
- Windows RAID with Data Configuration: Support for RAID 0, 1; No support for RAID 5, 10
- Linux RAID with Boot Configuration: Functional for RAID 0, 1\*; No support for RAID 5, 10
- Linux RAID with Data Configuration: Functional for RAID 0, 1, 5, 10\*\*

\*RAID 1 can be set up, yet will not provide complete, redundant protection as the boot partition is not replicated on both drives. An OS boot partition cannot be protected by software RAID 1.

\*\* Limited testing has been done with Linux to confirm RAID support and performance characteristics

On Z8 G4, Z6 G4, and Z4 G4, bootable RAID support can be configured via VROC. VROC is an Intel technology that allows NVMe devices to be configured and included in RAID arrays.

There are two versions of VROC available to customers:

- Standard – This version enables RAID 0, RAID 1, and RAID 10. RAID volumes are bootable as long as the configured devices are all on the same PCIe Root Port.
- Premium – This version enables all RAID levels available in the Standard version and adds RAID 5.

#### Z1 G3 Platform Note

There are two, adjacent Z Turbo Drive native slots. The Thermal Solution for Z1 G3 is a one-piece heatsink which accommodates both M.2 modules, thus only 1 Thermal Solution kit is required when using one or two M.2 modules. When ordering M.2 modules with the original configuration from the factory, the Thermal Solution will be included.

### Overview

#### Models

##### HP Z240/440/640/840 Workstation

HP Z Turbo Drive G2 256GB SSD	M1F73AA
HP Z Turbo Drive G2 512GB SSD	M1F74AA
HP Z Turbo Drive G2 1TB SSD	T9H98AA
HP Z Turbo Drive Quad Pro 2x256GB PCIe SSD	N2M98AA
HP Z Turbo Drive Quad Pro 2x512GB PCIe SSD	N2M99AA
HP Z Turbo Drive Quad Pro 2x1TB PCIe SSD	T9H99AA
HP Z Turbo Drive Dual Pro 256GB SSD	4YF60AA
HP Z Turbo Drive Dual Pro 512GB SSD	4YF61AA
HP Z Turbo Drive Dual Pro 1TB SSD	4YF62AA
HP Z Turbo Drive Dual Pro 2TB SSD	4YF63AA

##### HP Z240 Workstation

HP Z Turbo Drive G2 256GB PCIe SSD (Z240 MB)	T6U42AA
HP Z Turbo Drive G2 512GB PCIe SSD (Z240 MB)	T6U43AA
HP Z Turbo Drive G2 1TB PCIe SSD (Z240 MB)	W6C19AA

##### HP Z2 Mini

HP Z Turbo Drive G2 256GB TLC (Z2 Mini)	Y7B60AA
HP Z Turbo Drive G2 256GB MLC (Z2 Mini)	Y7B58AA
HP Z Turbo Drive G2 512GB MLC (Z2 Mini)	Y7B58AA

##### HP Z4 G4/Z6 G4

HP Z Turbo Drive 256GB MLC Z4/Z6 G4 SSD Kit	1PD56AA
HP Z Turbo Drive 512GB MLC Z4/Z6 G4 SSD Kit	1PD57AA
HP Z Turbo Drive 1TB MLC Z4/Z6 G4 SSD Kit	1PD58AA
HP Z Turbo Drive 256GB TLC Z4/Z6 G4 SSD Kit	1PD59AA
HP Z Turbo Drive 512GB TLC Z4/Z6 G4 SSD Kit	1PD60AA
HP Z Turbo Drive 1TB TLC Z4/Z6 G4 SSD Kit	1PD61AA
HP Z Turbo Drive 2TB TLC Z4/Z6 G4 SSD Kit	TBD

##### HP Z8 G4

HP Z Turbo Drive 256GB MLC Z8 G4 SSD Kit	1PD44AA
HP Z Turbo Drive 512GB MLC Z8 G4 SSD Kit	1PD45AA
HP Z Turbo Drive 1TB MLC Z8 G4 SSD Kit	1PD46AA
HP Z Turbo Drive 256GB MLC Z8 G4 SSD Module	1PD50AA
HP Z Turbo Drive 512GB MLC Z8 G4 SSD Module	1PD51AA
HP Z Turbo Drive 1TB MLC Z8 G4 SSD Module	1PD52AA
HP Z Turbo Drive 256GB TLC Z8 G4 SSD Kit	1PD47AA
HP Z Turbo Drive 512GB TLC Z8 G4 SSD Kit	1PD48AA
HP Z Turbo Drive 1TB TLC Z8 G4 SSD Kit	1PD49AA
HP Z Turbo Drive 2TB TLC Z8 G4 SSD Kit	TBD
HP Z Turbo Drive 256GB TLC Z8G4 SSD Module	1PD53AA
HP Z Turbo Drive 512GB TLC Z8G4 SSD Module	1PD54AA
HP Z Turbo Drive 1TB TLC Z8G4 SSD Module	1PD55AA
HP Z Turbo Drive 2TB TLC Z8G4 SSD Module	TBD

##### HP Z Turbo Drive G2

HP Z Turbo Drive Quad Pro 256GB SSD module	N2N00AA
--	---------

### Overview

HP Z Turbo Drive Quad Pro 512GB SSD module	N2N01AA
HP Z Turbo Drive Quad Pro 1TB SSD module	T9J00AA
HP Z Turbo Drive Quad Pro 2TB SSD module	3KP43AA
<b>HP Z1 G3/Z2 G3/Z3 G3</b>	
HP Z Turbo Drive G2 256GB PCIe SSD (Z1 G3)	W5A06AA
HP Z Turbo Drive G2 512GB PCIe SSD (Z1 G3)	W5A07AA
HP Z Turbo Drive G2 1TB PCIe SSD (Z1 G3)	T0K72AA
HP Z Turbo Drive Thermal Solution (Z1 G3)	W0T85AA
HP Z Turbo Drive G2 256GB TLC SSD	Y1T46AA
HP Z Turbo Drive G2 512GB TLC SSD	Y1T49AA
HP Z Turbo Drive G2 1TB TLC SSD	Y1T52AA
HP Z Turbo Drive G2 256GB TLC PCIe SSD (Z2 MB)	Y1T47AA
HP Z Turbo Drive G2 512GB TLC PCIe SSD (Z2 MB)	Y1T50AA
HP Z Turbo Drive G2 1TB TLC PCIe SSD (Z2 MB)	Y1T53AA
HP Z Turbo Drive G2 256GB TLC PCIe SSD (Z1 G3)	Y1T48AA
HP Z Turbo Drive G2 512GB TLC PCIe SSD (Z1 G3)	Y1T51AA
HP Z Turbo Drive G2 1TB TLC PCIe SSD (Z1 G3)	Y1T54AA
HP Z Turbo Drive G2 256GB SED SSD	Y1T55AA
HP Z Turbo Drive G2 512GB SED SSD	Y1T58AA
HP Z Turbo Drive G2 512GB SED (Z2 MB)	Y1T59AA
HP Z Turbo Drive G2 256GB SED (Z2 MB)	Y1T56AA
HP Z Turbo Drive G2 256GB SED (Z1 G3)	Y1T57AA
HP Z Turbo Drive G2 512GB SED (Z1 G3)	Y1T60AA

**NOTE 1:** Not available today as After Market Option

---

### Technical Specifications

#### PCIe SSDs for HP Workstations

#### HP Z Turbo Drive G2 256GB SSD

<b>Capacity</b>	256GB								
<b>Protocol</b>	PCIe								
<b>Form Factor</b>	M.2 in Half-height, half-length card								
<b>Controller</b>	NVMe								
<b>NAND Type</b>	3D MLC								
<b>Endurance</b>	150TBW (TB Written)								
<b>Reliability (MTBF)</b>	1.5M hours								
<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical								
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)								
<b>Performance</b>	<table> <tr> <td><b>Sequential Read</b></td> <td>3100 MB/s</td> </tr> <tr> <td><b>Sequential Write</b></td> <td>1400 MB/s</td> </tr> <tr> <td><b>Random Read</b></td> <td>330K IOPS</td> </tr> <tr> <td><b>Random Write</b></td> <td>280K IOPS</td> </tr> </table>	<b>Sequential Read</b>	3100 MB/s	<b>Sequential Write</b>	1400 MB/s	<b>Random Read</b>	330K IOPS	<b>Random Write</b>	280K IOPS
<b>Sequential Read</b>	3100 MB/s								
<b>Sequential Write</b>	1400 MB/s								
<b>Random Read</b>	330K IOPS								
<b>Random Write</b>	280K IOPS								

#### HP Z Turbo Drive G2 512GB SSD

<b>Capacity</b>	512GB								
<b>Protocol</b>	PCIe								
<b>Form Factor</b>	M.2 in Half-height, half-length card								
<b>Controller</b>	NVMe								
<b>NAND Type</b>	3D MLC								
<b>Endurance</b>	300TBW (TB Written)								
<b>Reliability (MTBF)</b>	1.5M hours								
<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical								
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)								
<b>Performance</b>	<table> <tr> <td><b>Sequential Read</b></td> <td>3200 MB/s</td> </tr> <tr> <td><b>Sequential Write</b></td> <td>1700 MB/s</td> </tr> <tr> <td><b>Random Read</b></td> <td>330K IOPS</td> </tr> <tr> <td><b>Random Write</b></td> <td>300K IOPS</td> </tr> </table>	<b>Sequential Read</b>	3200 MB/s	<b>Sequential Write</b>	1700 MB/s	<b>Random Read</b>	330K IOPS	<b>Random Write</b>	300K IOPS
<b>Sequential Read</b>	3200 MB/s								
<b>Sequential Write</b>	1700 MB/s								
<b>Random Read</b>	330K IOPS								
<b>Random Write</b>	300K IOPS								

#### HP Z Turbo Drive G2 1TB SSD

<b>Capacity</b>	1TB								
<b>Protocol</b>	PCIe								
<b>Form Factor</b>	M.2 in Half-height, half-length card								
<b>Controller</b>	NVMe								
<b>NAND Type</b>	3D MLC								
<b>Endurance</b>	600TBW (TB Written)								
<b>Reliability (MTTF)</b>	1.5M hours								
<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical								
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)								
<b>Performance</b>	<table> <tr> <td><b>Sequential Read</b></td> <td>3200 MB/s</td> </tr> <tr> <td><b>Sequential Write</b></td> <td>1700 MB/s</td> </tr> <tr> <td><b>Random Read</b></td> <td>330K IOPS</td> </tr> <tr> <td><b>Random Write</b></td> <td>300K IOPS</td> </tr> </table>	<b>Sequential Read</b>	3200 MB/s	<b>Sequential Write</b>	1700 MB/s	<b>Random Read</b>	330K IOPS	<b>Random Write</b>	300K IOPS
<b>Sequential Read</b>	3200 MB/s								
<b>Sequential Write</b>	1700 MB/s								
<b>Random Read</b>	330K IOPS								
<b>Random Write</b>	300K IOPS								

### Technical Specifications

<b>HP Z Turbo Drive Quad Pro 2x256GB PCIe SSD</b>	<b>Capacity</b>	512GB (2x256GB)		
	<b>Protocol</b>	PCIe		
	<b>Form Factor</b>	M.2 in Half-height, half-length card		
	<b>Controller</b>	NVMe		
	<b>NAND Type</b>	3D MLC		
	<b>Endurance</b>	150TBW (TB Written)		
	<b>Reliability (MTBF)</b>	1.5M hours		
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical		
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)		
	<b>Performance</b>	<b>Sequential Read</b>	3100 MB/s	
		<b>Sequential Write</b>	1400 MB/s	
		<b>Random Read</b>	330K IOPS	
		<b>Random Write</b>	280K IOPS	

<b>HP Z Turbo Drive Quad Pro 2x512GB PCIe SSD</b>	<b>Capacity</b>	1TB (2x512GB)		
	<b>Protocol</b>	PCIe		
	<b>Form Factor</b>	PCIe Card, Full Height PCIe Slot		
	<b>Controller</b>	NVMe		
	<b>NAND Type</b>	3D MLC		
	<b>Endurance</b>	300TBW (TB Written)		
	<b>Reliability (MTBF)</b>	1.5M hours		
	<b>Interface</b>	PCIe Gen3 x4 architecture		
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)		
	<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s	
		<b>Sequential Write</b>	1800 MB/s	
		<b>Random Read</b>	430K IOPS	
		<b>Random Write</b>	320K IOPS	

<b>HP Z Turbo Drive Quad Pro 2x1TB PCIe SSD</b>	<b>Capacity</b>	2TB (2x1TB)		
	<b>Protocol</b>	PCIe		
	<b>Form Factor</b>	PCIe Card, Full Height PCIe Slot		
	<b>Controller</b>	NVMe		
	<b>NAND Type</b>	3D MLC		
	<b>Endurance</b>	300TBW (TB Written)		
	<b>Reliability (MTBF)</b>	1.5M hours		
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical		
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)		
	<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s	
		<b>Sequential Write</b>	1800 MB/s	
		<b>Random Read</b>	430K IOPS	
		<b>Random Write</b>	320K IOPS	

**Capacity** 2TB



### Technical Specifications

<b>HP Z Turbo Drive Quad Pro 2x2TB PCIe SSD</b>	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	600TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	Sequential Read	3000 MB/s
		Sequential Write	950 MB/s (2200 MB/s max/Turbo)
Random Read		305K IOPS	
Random Write		265K IOPS	
<b>HP Z Turbo Drive Quad Pro 256GB SSD module</b>	<b>Capacity</b>	256GB (one M.2 PCIe NVMe module)	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>HP Z Turbo Drive Quad Pro 512GB SSD module</b>	<b>Capacity</b>	512GB (one M.2 PCIe NVMe module)	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>HP Z Turbo Drive Quad Pro 1TB SSD module</b>	<b>Capacity</b>	1TB (one M.2 PCIe NVMe module)	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>HP Z Turbo Drive Quad Pro 2TB SSD module</b>	<b>Capacity</b>	2TB (one M.2 PCIe NVMe module)	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>HP Z Turbo Drive G2 256GB PCIe SSD (Z240 MB)</b>	<b>Capacity</b>	256GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard (MB)	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	150TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b> 3100 MB/s	

### Technical Specifications

		<b>Sequential Write</b>	1400 MB/s
		<b>Random Read</b>	330K IOPS
		<b>Random Write</b>	280K IOPS
<b>HP Z Turbo Drive G2 512GB PCIe SSD (Z240 MB)</b>	<b>Capacity</b>	512GB (one M.2 PCIe NVMe module)	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s
		<b>Sequential Write</b>	1800 MB/s
		<b>Random Read</b>	430K IOPS
		<b>Random Write</b>	320K IOPS
<b>HP Z Turbo Drive G2 1TB PCIe SSD (Z240 MB)</b>	<b>Capacity</b>	1TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	600TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s
		<b>Sequential Write</b>	1800 MB/s
		<b>Random Read</b>	430K IOPS
		<b>Random Write</b>	320K IOPS
<b>HP Z Turbo Drive G2 256GB PCIe SSD (Z1 G3)</b>	<b>Capacity</b>	256GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard (MB)	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	150TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3100 MB/s
		<b>Sequential Write</b>	1400 MB/s

### Technical Specifications

		<b>Random Read</b>	330K IOPS
		<b>Random Write</b>	280K IOPS
<b>HP Z Turbo Drive G2 512GB PCIe SSD (Z1 G3)</b>	<b>Capacity</b>	512GB (one M.2 PCIe NVMe module)	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s
		<b>Sequential Write</b>	1800 MB/s
		<b>Random Read</b>	430K IOPS
		<b>Random Write</b>	320K IOPS
<b>HP Z Turbo Drive G2 1TB PCIe SSD (Z1 G3)</b>	<b>Capacity</b>	1TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	600TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s
		<b>Sequential Write</b>	1800 MB/s
		<b>Random Read</b>	430K IOPS
		<b>Random Write</b>	320K IOPS
<b>HP Z Turbo Drive Thermal Solution (Z1 G3)</b>	<b>Capacity</b>	Heatsink accommodates up to 2 PCIe SSD modules	

<b>HP Z Turbo Drive G2 256GB TLC SSD</b>	<b>Capacity</b>	256GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	75TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	

### Technical Specifications

	<b>Performance</b>	<b>Sequential Read</b>	2800 MB/s
		<b>Sequential Write</b>	320 MB/s (1100 MB/s max/Turbo)
		<b>Random Read</b>	250K IOPS
		<b>Random Write</b>	180K IOPS
<b>HP Z Turbo Drive G2 512GB TLC SSD</b>	<b>Capacity</b>	512GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	150TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	2800 MB/s
		<b>Sequential Write</b>	660 MB/s (1600 MB/s max/Turbo)
		<b>Random Read</b>	260K IOPS
		<b>Random Write</b>	260K IOPS
<b>HP Z Turbo Drive G2 1TB TLC SSD</b>	<b>Capacity</b>	1TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3000 MB/s
		<b>Sequential Write</b>	1150 MB/s (1700 MB/s max/Turbo)
		<b>Random Read</b>	360K IOPS
		<b>Random Write</b>	330K IOPS
<b>HP Z Turbo Drive Dual Pro 256GB SSD</b>	<b>Capacity</b>	256GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	75TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	

### Technical Specifications

	<b>Performance</b>	<b>Sequential Read</b>	2800 MB/s
		<b>Sequential Write</b>	320 MB/s (1100 MB/s max/Turbo)
		<b>Random Read</b>	250K IOPS
		<b>Random Write</b>	180K IOPS
<b>HP Z Turbo Drive Dual Pro 512GB SSD</b>	<b>Capacity</b>	512GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	150TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	2800 MB/s
		<b>Sequential Write</b>	660 MB/s (1600 MB/s max/Turbo)
		<b>Random Read</b>	260K IOPS
		<b>Random Write</b>	260K IOPS
<b>HP Z Turbo Drive Dual Pro 1TB SSD</b>	<b>Capacity</b>	1TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3000 MB/s
		<b>Sequential Write</b>	1150 MB/s (1700 MB/s max/Turbo)
		<b>Random Read</b>	360K IOPS
		<b>Random Write</b>	330K IOPS
<b>HP Z Turbo Drive Dual Pro 2TB SSD</b>	<b>Capacity</b>	2TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	

### Technical Specifications

	<b>Performance</b>	<b>Sequential Read</b>	3000 MB/s
		<b>Sequential Write</b>	1150 MB/s (1700 MB/s max/Turbo)
		<b>Random Read</b>	360K IOPS
		<b>Random Write</b>	330K IOPS
<b>HP Z Turbo Drv G2 256GB TLC PCIe SSD (Z2 MB)</b>	<b>Capacity</b>	256GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	75TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	2800 MB/s
		<b>Sequential Write</b>	320 MB/s (1100 MB/s max/Turbo)
		<b>Random Read</b>	250K IOPS
		<b>Random Write</b>	180K IOPS
<b>HP Z Turbo Drv G2 512GB TLC PCIe SSD (Z2 MB)</b>	<b>Capacity</b>	512GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	150TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	2800 MB/s
		<b>Sequential Write</b>	660 MB/s (1600 MB/s max/Turbo)
		<b>Random Read</b>	260K IOPS
		<b>Random Write</b>	260K IOPS

### Technical Specifications

<b>HP Z Turbo Drv G2 1TB TLC PCIe SSD (Z2 MB)</b>	<b>Capacity</b>	1TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3000 MB/s
		<b>Sequential Write</b>	1150 MB/s (1700 MB/s max/Turbo)
		<b>Random Read</b>	360K IOPS
		<b>Random Write</b>	330K IOPS
<b>HP Z Turbo Drive G2 256GB TLC PCIe SSD (Z1 G3)</b>	<b>Capacity</b>	256GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	75TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	2800 MB/s
		<b>Sequential Write</b>	320 MB/s (1100 MB/s max/Turbo)
		<b>Random Read</b>	250K IOPS
		<b>Random Write</b>	180K IOPS
<b>HP Z Turbo Drive G2 512GB TLC PCIe SSD (Z1 G3)</b>	<b>Capacity</b>	512GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	150TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	2800 MB/s
		<b>Sequential Write</b>	660 MB/s (1600 MB/s max/Turbo)
		<b>Random Read</b>	260K IOPS
		<b>Random Write</b>	260K IOPS

### Technical Specifications

<b>HP Z Turbo Drive G2 1TB TLC PCIe SSD (Z1 G3)</b>	<b>Capacity</b>	1TB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D TLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3000 MB/s
		<b>Sequential Write</b>	1150 MB/s (1700 MB/s max/Turbo)
		<b>Random Read</b>	360K IOPS
		<b>Random Write</b>	330K IOPS
<b>HP Z Turbo Drive G2 256GB SED SSD</b>	<b>Capacity</b>	256GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card Or M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	150TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3100 MB/s
		<b>Sequential Write</b>	1400 MB/s
		<b>Random Read</b>	330K IOPS
		<b>Random Write</b>	280K IOPS
<b>Self-Encrypting Drive Support</b>	OPAL 2		
<b>HP Z Turbo Drive G2 512GB SED SSD</b>	<b>Capacity</b>	512GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in Half-height, half-length card Or M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s
		<b>Sequential Write</b>	1700 MB/s



### Technical Specifications

		<b>Random Read</b>	330K IOPS
		<b>Random Write</b>	300K IOPS
	<b>Self-Encrypting Drive Support</b>	OPAL 2	
<hr/>			
<b>HP Z Turbo Drive G2 512GB SED (Z2 MB)</b>	<b>Capacity</b>	512GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	300TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s
		<b>Sequential Write</b>	1700 MB/s
		<b>Random Read</b>	330K IOPS
		<b>Random Write</b>	300K IOPS
	<b>Self-Encrypting Drive Support</b>	OPAL 2	
<hr/>			
<b>HP Z Turbo Drive G2 256GB SED (Z2 MB)</b>	<b>Capacity</b>	256GB	
	<b>Protocol</b>	PCIe	
	<b>Form Factor</b>	M.2 in native slot on motherboard	
	<b>Controller</b>	NVMe	
	<b>NAND Type</b>	3D MLC	
	<b>Endurance</b>	150TBW (TB Written)	
	<b>Reliability (MTBF)</b>	1.5M hours	
	<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Performance</b>	<b>Sequential Read</b>	3100 MB/s
		<b>Sequential Write</b>	1400 MB/s
		<b>Random Read</b>	330K IOPS
		<b>Random Write</b>	280K IOPS
	<b>Self-Encrypting Drive Support</b>	OPAL 2	

### Technical Specifications

#### HP Z Turbo Drive G2 256GB SED (Z1 G3)

<b>Capacity</b>	256GB	
<b>Protocol</b>	PCIe	
<b>Form Factor</b>	M.2 in native slot on motherboard	
<b>Controller</b>	NVMe	
<b>NAND Type</b>	3D MLC	
<b>Endurance</b>	150TBW (TB Written)	
<b>Reliability (MTBF)</b>	1.5M hours	
<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>Performance</b>	<b>Sequential Read</b>	3100 MB/s
	<b>Sequential Write</b>	1400 MB/s
	<b>Random Read</b>	330K IOPS
	<b>Random Write</b>	280K IOPS
<b>Self-Encrypting Drive Support</b>	OPAL 2	

#### HP Z Turbo Drive G2 512GB SED (Z1 G3)

<b>Capacity</b>	512GB	
<b>Protocol</b>	PCIe	
<b>Form Factor</b>	M.2 in native slot on motherboard	
<b>Controller</b>	NVMe	
<b>NAND Type</b>	3D MLC	
<b>Endurance</b>	300TBW (TB Written)	
<b>Reliability (MTBF)</b>	1.5M hours	
<b>Interface</b>	PCI Express 3.0 x4 electrical x4 physical	
<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
<b>Performance</b>	<b>Sequential Read</b>	3200 MB/s
	<b>Sequential Write</b>	1700 MB/s
	<b>Random Read</b>	330K IOPS
	<b>Random Write</b>	300K IOPS
<b>Self-Encrypting Drive Support</b>	OPAL 2	

### Summary of Changes

Date of change:	Version History:		Description of change:
	From v1 to v2		
June 11, 2014	From v3 to v4	Removed	Removed the Z Turbo Drives.
September 2, 2014	From v4 to v5	Added	Add slot recommendations for Z840, Z640, Z440, details for Boot, note for support of Secure erase, and Linux support
December 1, 2014	From v5 to v6	Changed	HP Z Turbo Drive compatibility
February 1, 2015	From v6 to v7	Added	Support for Z440, 640 and 840 Workstations
		Removed	third party tools support for Secure Erase
April 1, 2015	From v7 to v8	Added	Z Turbo Drives G2 256 and 512GB
		Removed	Fusion ioFX
June 1, 2015	From v8 to v9	Added	RAID Compatibility
		Changed	Messaging and Compatibility
February 1, 2016	From v9 to v10	Added	HP Z240 Workstations compatibility
		Changed	Z Turbo Drives and Z Turbo Drive Quad Pro Specs
March 1, 2016	From v10 to v11	Changed	Z Turbo G2 NVMe devices comments and driver links
April 1, 2015	From v11 to v12	Added	HP Z Turbo Drive G2 1TB for all current platforms, 256,512GB and 1TB; Support Z240 and Z1 G3, HP Z Turbo Drive Thermal Solution (Z1 G3)
June 7, 2016	From v12 to v13	Added	Z1 G3 Platform Note
		Changed	HP Z Turbo Drive 256GB & 512GB SSD combined performance specs
September 1, 2016	From v13 to v14	Added	new models for SED versions and Turbo Drives Quad Pro, 256GB TLC drive, as well as Z240 specs
		Changed	edits to MTTF info
October 1, 2016	From v14 to v15	Added	Minor specs to TLC drive, as well as Z1 G3, and Z2 drives
		Changed	updates for TLC and SED parts
November 1, 2016	From v15 to v16	Added	HP Z Turbo Drive Quad Pro 2x1TB PCIe SSD
January 1, 2017	From v16 to v17	Added	HP Z Turbo Drive G2 256GB TLC, HP Z Turbo Drive G2 512GB TLC, HP Z Turbo Drive G2 1TB TLC
June 1, 2017	From v17 to v18	Changed	Performance section, Updated all G2 products
		Removed	HP Z Turbo Drive 256GB SSD & HP Z Turbo Drive 512GB SSD also removed references to Z Turbo Drive G1
October 16, 2017	From v18 to v19	Added	HP Z Turbo Drive G2 models to page 4 and pictures to page 2
		Changed	Model list rearranged
November 15, 2018	From v19 to v20	Added	HP Z Turbo Drive Quad Pro 2x2TB PCIe SSD, HP Z Turbo Drive Dual Pro 256GB SSD, HP Z Turbo Drive Dual Pro 512GB SSD, HP Z Turbo Drive Dual Pro 1TB SSD, HP Z Turbo Drive Dual Pro 2TB SSD and HP Z Turbo Drive Quad Pro 2TB SSD Module

© Copyright 2018, 2018 HP Development Company, L.P.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. The information contained herein is subject to change without notice.