


### Overview

### HP DreamColor Z24x Professional Display

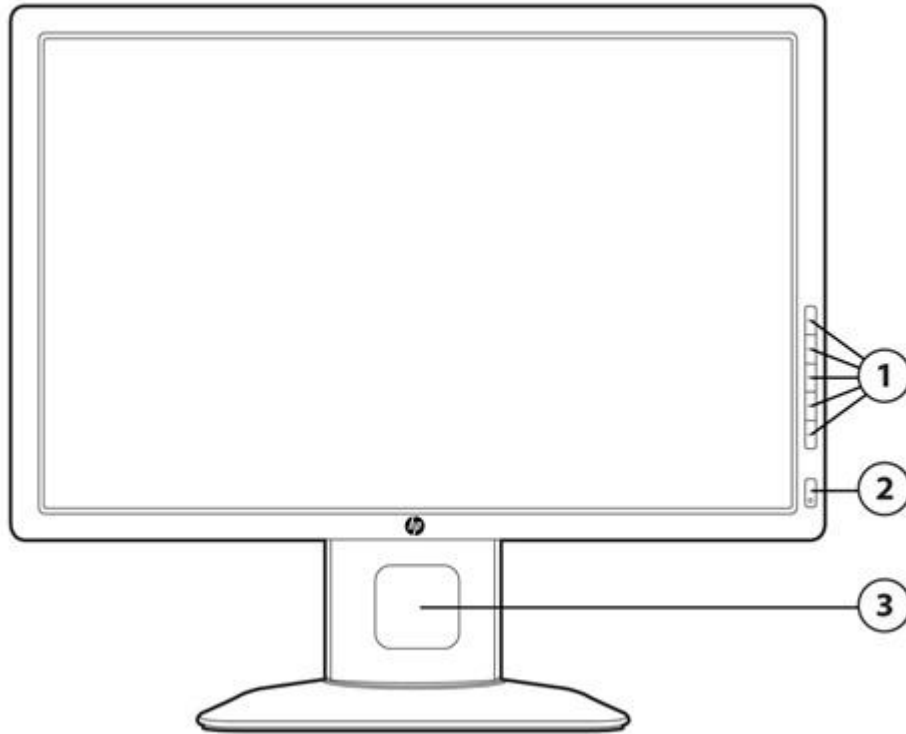

- 1. Programmable hotkey Function buttons** 4 programmable hotkey function buttons with 12 mappable functions
- 2. Power/LED** Power On/Off  
  
LED:  
fully powered = white;  
sleep mode = amber;  
sleep timer mode = flashing amber.
- 3. Cable Management** Effortless routing of cables through the cable management tunnel at the base of the column.

### Models

E9Q82A4, E9Q82A8, E9Q82AS, E9Q82AT

### Technical Specifications

<b>Panel</b>	<b>Type</b>	24-inch IPS Gen 2, LED Backlit
	<b>Viewable Image Area</b> (diagonal)	<b>60,96 cm</b> (24 in) widescreen; diagonally measured
	<b>Panel Active Area</b> (W x H)	<b>52 x 32,56 cm</b> (20.47 x 12.81 in.)
	<b>Panel Type</b>	Gen 2 IPS (Gen 2 technology, also called AH-IPS, enables lower power consumption)
	<b>Resolution</b>	1920 x 1200 @ 60 Hz
	<b>Aspect Ratio</b>	16:10
	<b>Viewing Angle</b> (typical)	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
	<b>Brightness</b> (typical)*	350nits (cd/m <sup>2</sup> )
	<b>Contrast Ratio</b> (typical)*	1,000:1
	<b>Dynamic Contrast Ratio</b> (typical)*	5,000,000:1
	<b>Response Rate</b> (typical)*	20 ms typical; 6 ms gray-to-gray
	<b>Pixel Pitch</b>	0.270 mm
	<b>Backlight Lamp Life</b> (to half brightness)*	30,000 hours minimum
	<b>Color Support**</b>	Up to 1.07 Billion colors
<b>Color Gamut</b>	100% of sRGB, 100% of BT.709, 99% of AdobeRGB, 96% of DCI-P3	
<p>*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.</p> <p>** With the use of FRC technology.</p>		
<b>User Controls</b>	<b>Buttons or Switches</b>	Master power switch (rear), secondary power, 5 programmable OSD/function buttons
	<b>Languages</b>	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
	<b>On Screen Display (OSD) User Controls</b>	Color Space, Video Inputs, Image Control, PIP Control, Language, Management Features, Message Control, Information, Factory Reset.
<b>DreamColor Functions</b>	<b>DreamColor Engine 2</b>	Internal color palette of 4.4 Trillion colors driven by 14-bit internal color precision. The engine outputs 10-bit color that produces 1,024 gray levels per channel and up to 1.07 billion on-screen colors.
	<b>Factory Calibrated Presets</b>	sRGB, AdobeRGB, BT.709, User and Native
	<b>User Calibration support</b>	Calibrate with optional HP DreamColor calibration solution (listed under options below). Includes customized X-Rite 1i Display Pro precision colorimeter and Windows software.
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	24-80 kHz
	<b>Vertical Frequency</b>	24-60 Hz
	<b>Native Resolution</b>	1920 x 1200 @ 60 Hz
	<b>Preset VESA Graphic Modes</b> (non-interlaced)	640 x 480 @ 60Hz 800 x 600 @ 60 Hz

### Technical Specifications

		1024 x 768 @ 60 Hz
		1280 x 720 @ 60 Hz
		1280 x 960 @ 60 Hz
		1280 x 1024 @ 60 Hz
		1440 x 900 @ 60 Hz
		1600 x 1200 @ 60 Hz
		1680 x 1050 @ 60 Hz
		1920 x 1200 @ 60 Hz
	<b>Maximum Pixel Clock Speed</b>	170 MHz
	<b>User Programmable Modes</b>	20
	<b>Anti-Glare</b>	Yes
	<b>Default Color Temperature</b>	Native (Monitor has four calibrate-able color spaces)
<b>Video/Other Inputs</b>	<b>Plug and Play</b>	Yes
	<b>Self Powered USB 3.0 Hub</b>	USB 3.0, (1) upstream and (4) downstream ports (2 on side and 2 on bottom)
	<b>Input Connectors</b>	(1) DVI-D, (1) DisplayPort 1.2 (1 input and 1 output), (1) HDMI; HDCP support on all inputs.
	<b>Video Cables Included</b>	(1) DVI-D <b>1,8 m</b> (5.9 ft), (1) DisplayPort <b>1,8 m</b> (5.9 ft)
	<b>USB Cable Included</b>	(1) USB 3.0 1,8 m (5.9 ft)
	<b>Audio</b>	(1) Audio out (analog)
<b>Power</b>	<b>Power Supply</b>	Internal
	<b>Input Power</b>	90 - 265 VAC at 45 - 63 Hz
	<b>Default Power<sup>1</sup></b>	58 W
	<b>Maximum Power<sup>2</sup></b>	84 W
	<b>Sleep Power</b>	> 0.5 W
	<b>Power Cable Length</b>	<b>1,9 m</b> (6.2 ft)
<b>Mechanical</b>	<b>Dimensions (W x D x H)</b>	<b>Unpacked w/stand</b> <b>55,94 x 23,8 x 52,5 cm</b> (highest setting) (22 x 9.4 x 20.7 in)
		<b>Unpacked w/o stand</b> <b>55,94 x 6,65 x 36,5 cm</b> (head only) (22 x 2.6 x 14.4 in)
		<b>Packaged</b> <b>66 x 45 x 30,1 cm</b> (26 x 17.7 x 11.8 in)
	<b>Weight</b>	<b>Head only</b> <b>4,73 kg</b> (10.4 lb)
		<b>Unpacked</b> <b>6,98 kg</b> (15.4 lb)
		<b>Packaged</b> <b>8,96 kg</b> (19.7 lb)
<b>Ergonomic Features</b>	<b>4-Way Comfort Adjust</b>	Easily adjust the display in height, tilt, swivel and pivot for maximum comfort.
	<b>Integrated Quick Release<sup>7</sup></b>	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts.

### Technical Specifications

	<b>Cable Management</b>	Enhanced cable management for easy concealment of power, video and USB cables. Effortless routing of cables through the cable management tunnel at the base of the column.
	<b>Detachable Stand</b>	Yes, ships detached
	<b>Tilt Range</b>	-5° to + 20° vertical
	<b>Swivel Range</b>	45°L to 45°R
	<b>Height Adjustable</b>	Yes, 0 to 120 mm
	<b>Pivot Rotation</b>	Yes
<b>Environmental</b>	<b>Temperature – Operating</b>	<b>5° to 35° C</b> (41° to 95° F)
	<b>Temperature– Non-operating</b>	<b>-20° to 60° C</b> (-4° to 140° F)
	<b>Humidity – Operating</b>	20% to 80% non-condensing
	<b>Humidity – Non-operating</b>	5% to 95%, 38.7° C max wet-bulb
	<b>Altitude – Operating</b>	<b>0 to 5,000 m</b> (0 to 16,404 ft)
	<b>Altitude – Non-operating</b>	<b>0 to 12,192 m</b> (0 to 40,000 ft)
	<b>White LED Backlights</b>	Yes
	<b>CCFL Panel</b>	No
	<b>Arsenic-Free Display Glass</b>	Yes
	<b>Low Halogen<sup>3</sup></b>	Yes (except cables)
	<b>Mercury-Free Display Backlighting</b>	Yes
<b>Environmental Data</b>	<b>Eco-Label Certifications &amp; declarations</b>	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration

**Energy Consumption  
(in accordance with US ENERGY STAR® test method)**

	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
Normal Operation	28.93 W	29.43 W	28.88 W
Sleep	0.48 W	0.54 W	0.47 W
Off	0.23 W	0.30 W	0.23 W

**Heat Dissipation\***

	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
Normal Operation	99 BTU/hr	101 BTU/hr	99 BTU/hr
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

### Technical Specifications

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 19 % post-consumer recycled plastic (by wt.)
- This product is 98.6 % recycle-able when properly disposed of at end of life.

#### Packaging Materials

<b>External:</b>	PAPER/Corrugated	1265 g
<b>Internal:</b>	PLASTIC/EPS (Expanded Polystyrene)	450 g
	PLASTIC/Polystyrene High Impact	55 g

#### RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)

### Technical Specifications

- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/>

### Technical Specifications

#### Options

For more information refer to the product's QuickSpecs.

#### **HP DreamColor Calibration System - B1F63AA**

[envmanagement.html](#)

The HP DreamColor Calibration Solution (DCS) is an affordable color calibration solution, allowing users to quickly and accurately recalibrate their monitor. Includes precision colorimeter and calibration software for the HP Z24x and other HP DreamColor displays and notebooks. The DCS colorimeter is a direct-connect calibration device for the Z27x.

#### **HP USB Graphics Adapter-Part number NL571AAq**

Enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other.

#### **HP Thin Client Mount Kit-Part number E5J35AA**

Attach your HP Thin Client or USDT PC to the back of select HP Z Displays and maintain optimal ergonomic adjustability with the HP Thin Client Mount Kit. Simply mount an HP Thin Client to the Kit's VESA plate, slide it into place on the back of an HP Z24i, Z27i or Z30i IPS Display stand, and you're ready to go.

#### **HP Dual Output USB Graphics Adapter-Part number C5U89AA**

Create a dual-monitor setup with the HP Dual Output USB Graphics Adapter - featuring both DVI-I and DisplayPort inputs to drive displays at high resolutions through a single USB 3.0 connection to your PC.

#### **HP LCD Speaker Bar-Part number NQ576AA**

Powered directly by the monitor or the PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP LCD monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately.

#### **HP Integrated Work Center Stand - USDT / Thin Clients - Part numbers E8H16AA/AT (black and meteorite), LH526AA/AT (black and silver).<sup>6</sup>**

HP Integrated Work Center Stand - USDT / Thin Clients - The HP Integrated Work Center Stand is designed to help maximize the use of limited desk space without compromising performance or productivity by accommodating an HP Ultra-slim Desktop PC or an HP Thin Client, and most HP 17 to 24-inch<sup>1</sup> diagonal LCD monitors, with VESA standard mounting brackets.

#### **HP Integrated Work Center Stand for Small Form Factors v3 -Part number F2P06AA<sup>5</sup>**

Maximize your available work space with the stylish and innovative HP Integrated Work Center for Small Form Factors v3 (HP IWC SFF v3), designed to match the newest HP PC designs. Create a customized "all-in-one" solution by combining an HP Small Form Factor (SFF) Business Desktop PC or Workstation with an LED monitor up to 24 diagonal inches.

#### **HP Single Monitor Arm-Part number BT861AA**

The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 50 degrees of tilt, and 360 degrees of pan and rotation - all at your fingertips -- helping you stay comfortable and productive throughout the day.

#### **HP Adjustable Dual Display Stand-Part Number AW664AA**

Premium space-saving dual screen solution provides access to more monitor real estate and makes it possible to manage multiple applications simultaneously. Weight adjustable for dual monitors from 17-24". Rotate displays into portrait/landscape positions.

#### **HP Display and Notebook II Stand-Part number E8G00AA**

Quickly and easily create a comfortable workspace for your notebook or notebook and docking station and an external display with the HP Display and Notebook II Stand, which brings your notebook PC, docking station,

### Technical Specifications

		and display up off the desk.
	<b>HP Adjustable Display Stand-Part number AW663AA</b>	Turn your HP Business Notebook into a desktop solution supporting up to a 24 inch display. A dual-hinged, smooth-motion display stand allows for greater depth, height and tilt adjustment for maximum comfort.
	<b>HP DisplayPort Cable Kit - Part number VN567AA</b>	Connects a DisplayPort connector on an HP Business Desktop computer to a DisplayPort connector on a monitor
	<b>HP Business PC Security Lock Kit-Part number PV606AA</b>	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.
<b>What's in the box?</b>	<b>Monitor and Accessories</b>	HP DreamColor Z24x Professional Display, AC power cord, USB cable, DVI-D cable, DisplayPort 1.2 cable
	<b>Documentation</b>	DVD documentation kit, factory calibration report
<b>Other</b>	<b>User Guide Languages</b>	English, Arabic, Bahasa Indonesia, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, B. Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	<b>Warranty Languages</b>	English, Arabic, Bahasa Indonesia, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, B. Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	<b>Color</b>	Black
	<b>VESA External Mounting</b>	Yes (one set of standard 4-hole pattern, 100 mm). Use of the top VESA 4-hole pattern will allow the user to set monitor head lower to the desk surface.
	<b>Security Lock-Ready</b>	Yes
	<b>Country of Origin</b>	China
<b>Certification and Compliance</b>		CEL Grade 1, Microsoft WHQL Certification (Windows 8 and Windows 7), FCC, CE mark, UL, TUV-GS, TUVKC-Ergonomics, WEEE, RoHS, C-Tick, Argentina S-Mark, VCCI, CECP, CCC, CEL Grade 1, Singapore PSB, EAC (Russia), NOM (Mexico), Ukraine.
<b>Compatibility</b>		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>		Protected by HP, including a 3 year standard limited warranty. Optional HP Care Pack Services are extended service contracts that extend your protection beyond the standard warranties. <sup>4</sup>

1. Default Power is measured with factory defaults, including factory default brightness and USB ports loaded at 25% of maximum.
2. Maximum Power is measured with monitor at maximum brightness and with USB ports loaded at 100% of maximum.
3. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
4. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See <http://www.hp.com/go/cpc> for details.
5. 17 to 24-inch diagonal monitors need to meet supported weight limits of 6 to 12.1 lbs. (2.7 to 5.5 kg).
6. The Integrated Work Center Stand has been designed to support 17 to 24-inch diagonal HP LCD monitors from 2.3 kg to 5.2 kg (5.07 lbs to 11.24 lbs).



### Technical Specifications

7. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.

© Copyright 2016 Hewlett-Packard Development Company, L.P.

All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

ENERGY STAR is a registered mark owned by the U.S. government.

### Change Log

<b>Change Log</b>			
May 23, 2016	From v1 to v2	Update	Removed ENERGY STAR and EPEAT references
June 06, 2016	From v2 to v3	Update	Removed TCO references