

Overview

HP ElitePad Mobile Retail Solution


HP ElitePad 1000 G2 + HP Retail Case



Front View

Shown with HP ElitePad 1000 G2 (Sold separately)

Overview

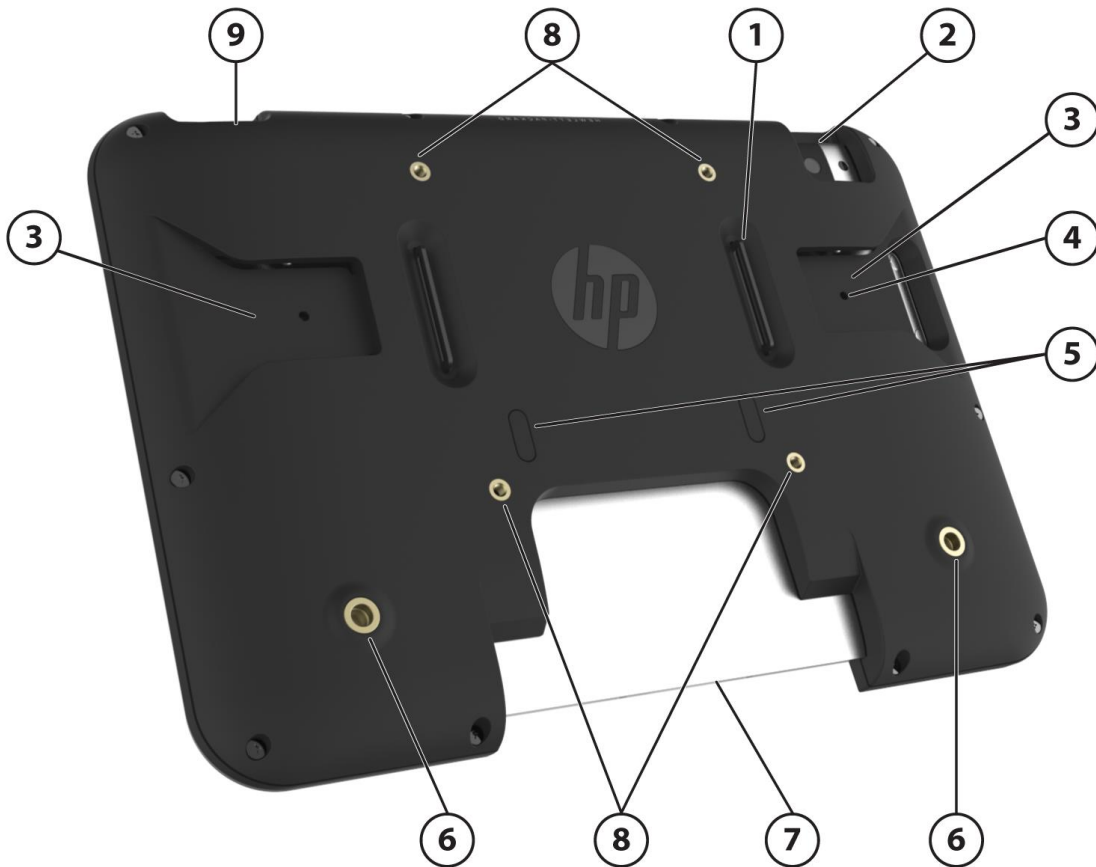

Rear View

- | | |
|--|--|
| 1. Adjustable hand strap | 6. Shoulder strap connection points |
| 2. Cutouts for Power, Camera, Volume buttons | 7. 70-pin connector & ElitePad Dock Cutout |
| 3. PED mount attachment areas | 8. VESA mount connectors |
| 4. PED screw-in security provision | 9. Cutouts for Audio Jack |
| 5. Latch areas for Retail Expansion Dock | |

Model

HP Mobile Retail Solution

Overview

AT A GLANCE

HP Retail Case for ElitePad

- Allows users to physically attach their choice of a mobile payment device (PED or PIN entry device) to the HP ElitePad and conduct mobile transactions using any major payment method
- 4 VESA mount screw holes allow the ElitePad to be mounted at an end cap, as a customer viewing display or in a fixed POS setting
- Locks into the HP Retail Expansion Dock for access to full POS connectivity. Also compatible with the HP ElitePad Docking Station
- 2-shoulder strap attach points for easy and reliable carrying
- Elastic hand strap supports comfortable use of ElitePad

* Requires separately purchased third party shoulder sling.

HP ElitePad 1000 G2

- Windows 10 Pro, 64-bit, Windows 10 IoT Enterprise, 64-bit, Windows 8.1 Pro Retail 64, Windows Embedded 8.1 Industry 64
- Two integrated webcams (2.1 MP/1080p (front facing); 8 MP with LED flash (rear facing))
- Intel® Atom Bay Trail-T Z3795 Quad Core 1.6 GHz SoC BGA
- Integrated Intel HD Graphics
- 10.1-inch diagonal WUXGA wide-viewing angle outdoor display (1920 x 1200)); 16:10 Aspect Ratio
- 4GB LPDDR3 1067 MHz Memory
- 2-cell (30 WHr) polymer HP Long Life battery
- 64 GB embedded Multi Media Card (eMMC)
- 9.2 mm thin profile
- Weight starting at 0.68 kg (1.50 lb)
- MicroSDXC card slot supports SDXC Cards up to 2TB
- Wireless connectivity: Broadcom 43241 802.11 a/b/g/n (2x2)+ BT 4 LE SDIO
- Standard commercial 1 year limited warranty with extended services available with optional HP Care Packs.

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Features

PRODUCT NAME

HP ElitePad Mobile Retail Solution

- HP ElitePad 1000 G2
- HP Retail Case for ElitePad

OPERATING SYSTEM

Preinstalled	Windows 10 Pro, 64-bit *
	Windows 10 IoT Enterprise Pro Retail, 64-bit *
	Windows 8.1 Pro Retail 64 **
	Windows Embedded 8.1 Industry 64**

* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See www.microsoft.com for details.

* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. See <http://www.microsoft.com> for details.

PROCESSOR

Intel Atom Z3795 (Quad Core 1.6 GHz base/2.39 GHz burst SoC BGA)*

* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

CHIPSET

Integrated SoC PCH

GRAPHICS

Integrated:
Intel HD Graphics

DISPLAY

Internal

10.1-inch diagonal WUXGA wide-viewing angle outdoor display (1920 x 1200)

- Wide-viewing angle
- Direct bonded
- Multi-touch capacitive digitizer
- Auto rotate (selectable)
- Tough, durable Corning Gorilla Glass 3
- Anti-smudge coating

Features

External

Up to 32-bit per pixel color depth

HDMI

Supports resolutions up to 1920x1200 @ 60 Hz

STORAGE AND DRIVES

Internal Storage Device

64GB* embedded Multi Media Card (eMMC)

MicroSDXC card slot supported

Supports MicroSDXC Cards up to 2TB

Removable Storage

Optional HP External Optical Drive using ElitePad USB connector

* For Solid State Drives (SSD), GB = 1 billion bytes. Actual formatted capacity is less. Up to 5 GB for Windows 8.1 is reserved for system recovery software.

MEMORY

Standard

4 GB LPDDR3 1067 MHz memory

NETWORKING/COMMUNICATIONS

Integrated Wireless LAN*

Broadcom 43241 802.11 a/b/g/n (2x2)+ BT 4 LE SDIO

*Wireless access point and internet service requires. Availability of public wireless access points limited.

AUDIO/MULTIMEDIA

Audio

HD audio with DTS Sound +

2 Integrated stereo speakers

2 integrated microphones (dual-microphone array) (noise cancelling and beam forming)

Combo stereo/headphone/microphone jack

Cameras

Integrated 2.1 MP/1080p* with LED (front-facing)

8 MP with LED flash (rear facing)

* HD content required to view HD images.

INPUT DEVICES

Optional HP Executive Tablet Pen G2*

* Sold separately or purchased as an optional feature.

SENSORS

Accelerometer

eCompass

Gyroscope

Ambient Light Sensor

Features

Haptics

POWER

Power Supply

External 10-watt HP ElitePad 10W Smart AC Adapter with detachable duck-heads
Total length is 5.9 ft (180 cm).

Primary Battery

2-cell (30 WHr) Lithium Polymer battery

Battery Life*

Up to 13.5 hours** (HP ElitePad 1000)

System Standby Time

Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

Power Conservation

Balanced

* Sold separately or as an optional feature.

**Testing conducted by HP consisting of full battery discharge while running a series of productivity scripts against the following applications (which may or may not be included with your particular product): Adobe® AcrobatReader 7.0, Adobe® Illustrator® CS2, Adobe® Photoshop® CS2, Apple® Quicktime 7.1, Intervideo® WinDVD® 8, Macromedia® Flash 8, Microsoft® Office® 2003 Pro, Microsoft® Project 2003, and Winzip® 10.0. Prior to testing, the system was fully charged, display brightness was set at 60 nits, wireless was turned off, and auto dim, suspend, hibernate and all other programs, utilities, and services not essential to running the computer system or battery life test were disabled. Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage.

Features

WEIGHTS & DIMENSIONS

Weight

ElitePad Only Starting at 0.68kg (1.50 lb)*

ElitePad with Retail Case Starting at 0.99kg (2.18lb)*

**Retail Case Only
(including hand strap)** 0.31kg (0.68 lb)

*Weight will vary by configuration. ElitePad weight includes 2-cell battery, embedded Multi Media Card, and 4 GB memory.

Dimensions (W x D x H)

ElitePad Only 26.1 x 0.92 x 17.8 cm 10.28 x 0.36 x 7.01 in

ElitePad with Retail Case 28.54 x 2.05 x 19.44 cm 11.24 x 0.81 x 7.65 in

PORTS/SLOTS

Ports

Headphone/Microphone Combo Jack – One
System Connector – One

Digital Media Slots

Micro SDXC card slot
Micro SIM slot

Features

SOFTWARE AND SECURITY

Software	Windows 10 Pro, 64-bit, Windows 10 IoT Enterprise, 64-bit, Windows 8.1 Pro Retail 64, Windows Embedded 8.1 Industry 64
Included Security	HP Client Security (incl. Credential Manager and Password Manager) Absolute Data Protect ¹ Device Access Manager with Just In Time Authentication (web only) Essential System Updates for Microsoft Windows 8.1
HP Value Add Software	HP ePrint Driver ² HP Manageability HP PageLift PDF Complete HP WallPaper System Default Settings HP PC Hardware Diagnostics UEFI
Microsoft Products	Buy Office

1. HP ElitePad 1000 includes a 4 year license of Absolute Data Protect to locate your device, lock and prevent unauthorized access and remotely delete personal data. License must be activated by customer. See <http://www.absolute.com/landing/2012/computrace-hp> for complete details. Absolute Data Protect agent is shipped turned off, and must be activated by customers. Service may be limited, check with Absolute for availability outside the U.S. The optional subscription service of Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. If Data Delete is utilized, the Recovery Guarantee payment is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either create a PIN or purchase one or more RSA SecurID tokens from Absolute Software.
2. HP ePrint requires an internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/businessmobileprinting>)

Security

Client Management Solutions - Fully manageable and supported by industry-standard HP Client Management Solutions. Optional LANDesk management suite simplifies mobile device management and security. Contact your account team or hp@landesk.com for more information.

LANDesk Management Suite 9.5 (sold separately) LANDesk Security Suite (sold separately)

HP System Software Manager (SSM)*
HP BIOS Configuration Utility (BCU)*
HP Client Management Interface (HP CMI)*

* **free downloads available at the CMS website under HP Hardware Management tools**
<http://www.hp.com/go/clientmanagement>

Features

Standard

Firmware TPM* (default), hardware TPM (v1.2)
Near Field Communication with Secure Element**

* A subset of the TPM 2.0 specification version v0.89 as implemented by Intel Platform Trust Technology (PTT).

** NFC is shipped disabled.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>

SERVICE AND SUPPORT

1-year standard parts, labor and onsite limited warranty, depending on country); 1-year limited warranty on primary battery. Optional HP Care Pack Services* are extended service contracts which go beyond your standard warranties.

For more details visit: <http://www.hp.com/go/cpc>.

* Sold separately..

NOTE: Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <http://www.hp.com/go/cpc>. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>

Technical Specifications

Technical Specifications

SYSTEM UNIT (ElitePad Only)

Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	90 Vac~265 Vac
	Average Operating Power	8 W
	Max Operating Power	< 10 W
Temperature	Operating	32° to 95° F (0° to 35° C)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	40 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Planned Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes
	UKRSERTCOMPUTER	Yes

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

DISPLAYS

10.1-inch diagonal WUXGA wide-viewing angle outdoor display (1920 x 1200)	Diagonal Size	10.1 inch
	Surface	Anti-smudge Gorilla Glass 3
	Refresh Rate	60Hz
	Brightness	400 nits (typical)*
	Format	1920 x 1200

* All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Technical Specifications

STORAGE AND DRIVES

64 GB embedded Multi Media Card (eMMC)	Drive Weight	Up to 2g
	Capacity	64 GB
	Height	1.4 mm
	Width	12 x 16 mm
	Interface	MMC protocol v4.51
	Performance	Sequential Read : 100MB/s (min.) Sequential Write : 40MB/s (min.)
	Features	Embedded Multi Media Card v4.51 compliant, TRIM, Secure Erase, CMD5 support, Partition management, Enhanced Write Protection, HS200 support

SECURITY

Near Field Communications (NFC)*	NFC Specifications	ISO/IEC 14443A, ISO/IEC 14443B PCD 106 kbps to 848 kbps ISO/IEC 14443A, ISO/IEC 14443B PICC 106 kbps to 424 kbps ISO/IEC 15693/ICODE reader NFC-IP1 and NFC-IP2 protocols, 106 kbps to 424 kbps MIFARE reader encryption mechanism NFC Forum Types 1-4 card reader
	Supported Host Interfaces	I2C Automatic wakeup from Standby via host control interface
	Dimensions	0.18 x 0.18 x 0.04 in (4.5 x 4.5 x 0.9 mm)
	Frequency Band	13.56 MHz ISO Band
	RF Output Voltage	3.3 V max 150 mA max (@3.0V output)
	Power Consumption	1.5 W (max)
	Antenna	Built-in
	Antenna Range	Up to 0.79 in (2 cm)
	Secure Element Interfaces	SWP/HCI according to ETSI/SCP standardization ISO/IEC 28361 (ECMA 373) NFC-WI. Data rate restricted to 106kbps
	Embedded Secure Element (eSE)	P5CN145 SmartMX Secure Dual Interface PKI Smart Card Controller
	eSE Memory	144 kB EEPROM 264 kB User ROM 7.5 kB RAM (5 kB standard, 2.5 kB FameXE RAM)
	Operating Temperature	-13 to 185 °F (-25 to +85°C)

* NFC is shipped disabled.

Technical Specifications

NETWORKING/COMMUNICATIONS

BROADCOM DUAL BAND WIRELESS-N 43241 802.11 A/B/G/N (2X2) WIFI + BLUETOOTH® 4.0 COMBO ADAPTOR *	WIRELESS LAN STANDARDS	IEEE 802.11A IEEE 802.11B IEEE 802.11G IEEE 802.11N
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	802.11b/g/n 2.402 - 2.482 GHz 802.11a/n 4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz
	Antenna Structure	2 transmit; 2 receive (2x2)
	Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
	Modulation	Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM
	Security¹	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between band Access Points
	Output Power²	<ul style="list-style-type: none"> • 2.4G: +13.5dBm minimum • 5G: +12dBm minimum
	Power Consumption	Transmit: 2.0 Watts Receive: 1.6 Watts Idle mode ³ : 150 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated) Radio off: 25 mW
	Power Management	802.11 compliant power saving mode
	Receiver Sensitivity⁴	802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps)

Technical Specifications

		802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)
		802.11n:-69 dBm (150 Mbps), -66 dBm (300 Mbps)
Antenna Connections		2 U.FL type connectors (output impedance of 50 ± 2 ohms)
Form Factor		Customize LGA Card
Dimensions		Width 17 x Depth 10.5 x High 1.5(mm)
Operating Voltage		3.3v +/- 9% and 1.8V +/- 9%
Temperature	Operating	14° to 158° F (-10° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
HP Integrated Module with Bluetooth 4.0 LE SDIO Wireless Technology*	Bluetooth Specification	BT 4.0 LE SDIO
<i>*This module is Bluetooth Smart Ready for systems running Windows 8 and Windows 8.1.</i>	Dimensions	Width 17 x Depth 10.5 x High 1.5(mm)
	Frequency Band	2402 to 2480 MHz
	Number of Available Channels	79 (1 MHz) available channels
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power	-1.5 dBm to 4 dBm (Bluetooth Class II)
	Receiver Sensitivity	Better than -20 dBm at 0.1 % raw bit error rate
	Power Consumption	Peak (Tx) 300 mW Peak (Rx) 180 mW Selective Suspend 10 mW
	Antenna	Internally integrated within module
	Range	Up to 33 ft (10 m)
	Electrical Interface	UART compliant
		Microsoft Windows Plug and Play compliant
	Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
	Security	Full support of Bluetooth Security Provisions
	Power Management	Microsoft Windows ACPI, and USB Bus Support Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark

Technical Specifications

Bluetooth Profiles Supported

Serial Port Profile (SPP)¹
 Service Discovery Application Profile (SDAP)
 Dial-Up Networking (DUN)^{1,2}
 Generic Object Exchange Profile (GOEP)^{1,2}
 Object Push Profile (OPP)^{1,2}
 File Transfer Profile (FTP)
 Synchronization Profile (SYNC)
 Hard Copy Cable Replacement (HCRP)^{1,2}
 Personal Area Networking Profile (PAN)^{1,2}
 Human Interface Device Profile (HID)^{1,2}
 FAX Profile (FAX)
 Basic Imaging Profile (BIP)²
 Headset Profile (HSP)
 Hands Free Profile (HFP)
 Advanced Audio Distribution Profile (A2DP)

* Wireless access point and internet service required and sold separately. Availability of public wireless access points limited.

AUDIO/MULTIMEDIA – HD audio with DTS Sound +

Audio Output Quality	Frequency Response	20 Hz - 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz - 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	500mW
	Impedance	4 ohm

POWER

HP 10W non-Smart AC Adapter	Dimensions	2.56 x 2.17 x 1.12 in (65.0 x 55.0 x 28.5 mm)		
	Input	Input	100 to 240 VAC	
		Input dPower Rating	< 15W	
	Output	Input frequency range	47 – 63 Hz	
		Input AC current	0.3A at 90 VAC	
		Voltage	9V +/- 4.0%	
		Constant power	11 W (maximum) continuously between DC output 9V – 6.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	1.1A	
	Connector	3 pin/grounded, mates with interchangeable cords; 70 pin / tyco connector (to tablet side)		
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)	
		Non-operating (storage) temperature	-4° to 185° F (-20° to 85° C)	

Technical Specifications

	Operating altitude	0 to 16,404 ft (0 to 5,000 m)
	Non-operating altitude	0 to 50,000 ft (0 to 15,240 m)
	Humidity	0% to 95%
	Storage Humidity	0% to 95%
EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE	
HP 2-cell (30 WHr) Polymer Long Life Primary battery	Weight	0.17 kg
	Dimensions (H x W x L)	8.7 x 1.56 x 0.17 in (22.09 x 13.963 x 0.43 cm)
	Cells/Type	2-cell, Lithium Ion Polymer
	Energy	Voltage 7.4V Amp-hour capacity 4.2 Watt-hour capacity 30Wh
	Temperature	Operating (Charging) 32° to 113° F (0° to 45° C) Operating (Discharging) 14° to 140° F (-10° to 60° C) Non-operating -4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF or Standby Mode depends on system setting System ON depends on system setting
	Fuel Gauge LED	No
	Warranty	36 months
	Optional Travel Battery Available	No

ENVIRONMENTAL DATA

MATERIAL USAGE

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

(http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)

Technical Specifications

- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 µgrams/cm²/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

END-OF-LIFE MANAGEMENT AND RECYCLING

Eligible for recycling or cash back through HP's buyback and recycling program.*

<http://www.hp.com/go/smbrecycling> (10 units or less)

www.hp.com/go/businessrecycling (overview of all business related end of use programs)

Email recycling.quote@hp.com to get a quote or details on recycling programs

*Program may not be available in your area. Check <http://www.hp.com/go/recycling> to see if HP offers for recycling in your area.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at:

<http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

HEWLETT-PACKARD CORPORATE ENVIRONMENTAL INFORMATION

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

COUNTRY OF ORIGIN

China

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
Docking	HP ElitePad Docking Station	G8C11AA
Input/Output	HP Executive Tablet Pen (G2)	F3G73AA
	HP ElitePad USB Adapter (USB 2.0)	H3N46AA
	HP ElitePad 3.0 Adapter	E8F98AA
	HP USB External DVDRW Drive	F2B56AA
	HP ElitePad Productivity Jacket	D6S54AA
	HP ElitePad Productivity Jacket (Americas)	D6S54UT
	HP ElitePad Productivity Jacket (EMEA)	D6S54ET
	HP ElitePad SD Card Reader	H3N48AA
	HP ElitePad Serial Adapter	H3N50AA
	HP Slim Bluetooth Keyboard	H4Q44AA
	HP Mini Wireless Keyboard (Mult-OS)	E5J21AA
	HP Ultra Mobile Wireless Mouse	H6F25AA
	HP X4000b Bluetooth Mouse	H3T50AA
	HP Slim Bluetooth Mouse	F3J92AA
Power	HP ElitePad 10 Watt AC Adapter	H4K08AA
	HP 65W Smart Adapter	ED49494AA
	HP ElitePad 40W AC Adapter	H5W93AA
	HP ElitePad Jacket Battery	H4F20AA
	HP ElitePad 12W USB Auto Adapter	F5V87AA
	HP ElitePad Smart AC Adapter	H3N47AA
	HP ElitePad USB Chrg 24Pk Cable	F5V88A6
Video	HP ElitePad HDMI & VGA Adapter	H3N45AA
Networking	HP ElitePad Ethernet Adapter	H3N49AA
	HP ElitePad Power/Ethernet Adapter	TBD
Charging Station	HP Multi-Tablet Charging Module	H4W98UT
Miscellaneous	HP Retail Jacket for ElitePad NoBattery	E6R78AA
	HP Retail Jacket for ElitePad w/Battery	E6R79AA

NOTE: For additional information and specifications for the HP ElitePad Accessories, please access the HP ElitePad Accessories QuickSpecs: http://h18004.www1.hp.com/products/quickspecs/14491_div/14491_div.html

Summary of Changes

Date of change:	Version History:		Description of change:
March 1, 2016	From v1 to v2	Added	Windows 10 Pro, 64-bit, and Windows 10 IoT Enterprise Pro Retail, 64-bit and notes

Copyright © 2014, 2016 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are U.S. trademarks of Microsoft Corporation. Intel and Atom are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of its proprietor used by HP Inc. under license.