


### Overview

### Overview

### HP EliteBook 850 G2 Notebook PC

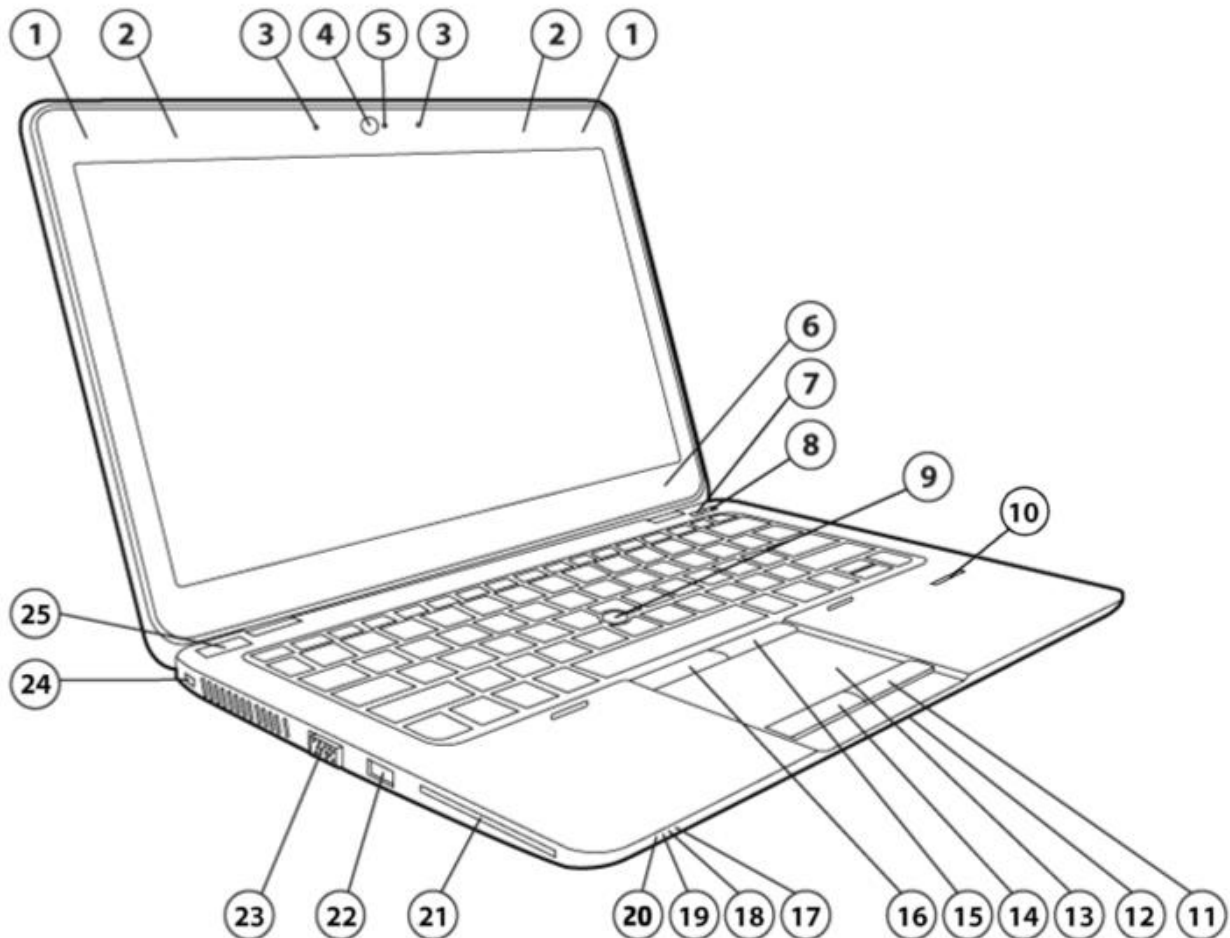


#### Front/Left

- |                                      |                                 |
|--------------------------------------|---------------------------------|
| 1. WLAN antennas (2)                 | 14. Left TouchPad button        |
| 2. WWAN antennas (2)                 | 15. Right pointing stick button |
| 3. Internal microphones (2)          | 16. Left pointing stick button  |
| 4. Webcam (select models only)       | 17. Hard drive light            |
| 5. Webcam light (select models only) | 18. AC adapter/Battery light    |
| 6. Internal display switch           | 19. Power light                 |
| 7. Wireless button                   | 20. Wireless light              |
| 8. Volume mute button                | 21. Smart card reader           |
| 9. Pointstick                        | 22. USB 3.0 port                |
| 10. Fingerprint reader (optional)    | 23. External VGA monitor port   |
| 11. Right TouchPad button            | 24. Security cable slot         |
| 12. NFC sensor (optional)            | 25. Power button                |
| 13. TouchPad zone                    |                                 |




### Overview

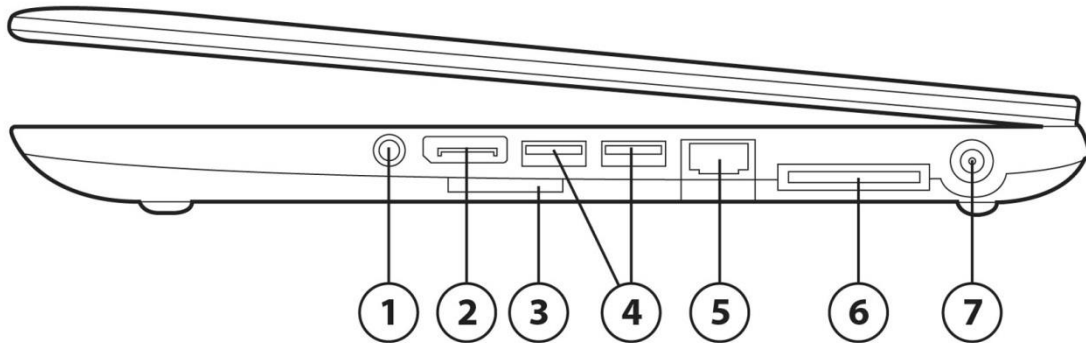

#### Right

- |   |                                   |
|---|-----------------------------------|
| 1. Audio-out (headphone) jack/Audio-in(microphone) jack | 5. Drop-jaw Ethernet port (RJ-45) |
| 2. DisplayPort  | 6. Docking port                   |
| 3. Memory card reader                                   | 7. Power connector                |
| 4. USB 3.0 ports (2)                                    |                                   |

### Overview

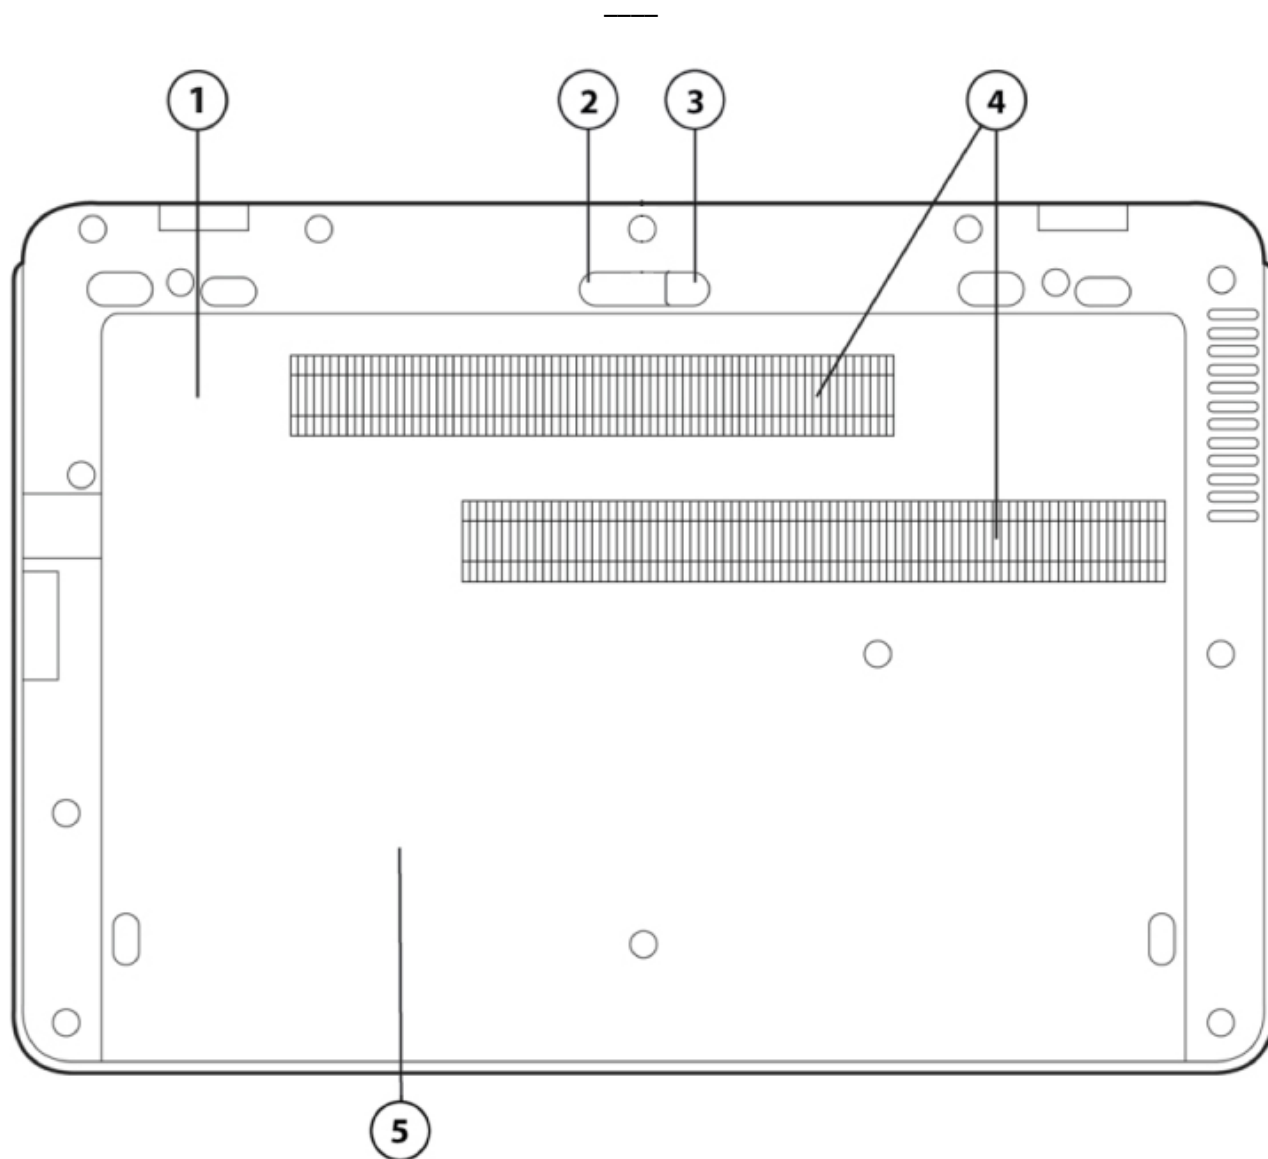

1. EasyAccess panel
2. EasyAccess panel release latch
3. Security screw

#### Bottom

4. Vents (2)
5. SIM slot (inside the panel)\*



### Overview

#### AT A GLANCE

- Windows 10 versions, Windows 8.1 versions , Windows 7 versions, Ubuntu Linux or FreeDOS 2.0
- Magnesium and aluminum chassis, HP DuraFinish, HP DisplaySafe frame, HP duraKeys, precision aluminum drop hinge, aluminum palm rest
- 4-step Soft-touch paint process
- Patent-pending Drop-jaw Ethernet port
- EasyAccess door to quickly access most components for easy serviceability
- Full-sized spill-resistant keyboard; optional back-lit keyboard keeps you productive in low-light settings
- Choice of 5<sup>th</sup> Generation Intel® Core™ i7, i5 and i3 processors
- Memory options up to 16 GB
- Weight starting at 4.02 lb/1.83 kg
- Storage options up to 1 TB Hard Drives, 512 GB Solid State Drives, or 256GB PCIe Solid State Drive
- M.2 32GB Flash Cache for Intel Smart Response Technology installed in the factory
- M.2 120GB Solid State Drive & 256GB PCIe Solid State Drive can be configured as primary storage or combined with a SATA drive for dual storage performance
- Integrated Intel® HD Graphics 5500 or AMD Radeon™ R7 M260X discrete graphics with 1 GB dedicated GDDR5 video memory
- Choice of Touch or Non Touch 15.6" diagonal displays
- Easily hot dock with the UltraSlim Docking Station
- DisplayPort for high resolution support
- Touchpad with scroll zone, on/off button with LED indicator
- Enhanced security features including HP Sure Start self-healing BIOS, HP Client Security and optional HP Fingerprint Reader
- Optional HD webcam with dual-microphone array for video conferencing
- HD Audio with DTS Studio Sound™ optimized for high fidelity audio
- Wireless and speaker mute buttons
- Supports a broad range of wireless LAN and wireless WAN options, including 4G LTE, for connectivity on the go.
- UEFI BIOS Compliant with 2.3.1 UEFI Specification

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**



### Features

#### PRODUCT NAME

**HP ELITEBOOK 850 G2 NOTEBOOK PC**

#### OPERATING SYSTEM

**Preinstalled**

- Windows 10 Pro 64\*
- Windows 10 Home 64\*
- Windows 8.1 Pro 64\*
- Windows 8.1 64\*
- Windows 7 Professional 64 (available through downgrade rights from Windows 10 Pro)\*\*\*
- Windows 7 Professional 32 (available through downgrade rights from Windows 10 Pro)\*\*\*
- Windows 7 Professional 64 (available through downgrade rights from Windows 8.1 Pro)\*\*
- Windows 7 Professional 32 (available through downgrade rights from Windows 8.1 Pro)\*\*
- Windows 7 Professional 64\*
- Windows 7 Professional 32\*
- Ubuntu Linux
- FreeDOS 2.0

**Web-only Support**

- Windows 10 Pro 64\*
- Windows 10 Home 64\*
- Windows 10 Enterprise 64\*
- Windows 8.1 Pro 64\*
- Windows 8.1 64\*
- Windows 8.1 Enterprise 64\*
- Windows 7 Professional 64 (available through downgrade rights from Windows 10 Pro)\*\*\*
- Windows 7 Professional 32 (available through downgrade rights from Windows 10 Pro)\*\*\*
- Windows 7 Professional 64 (available through downgrade rights from Windows 8.1 Pro)\*\*
- Windows 7 Professional 32 (available through downgrade rights from Windows 8.1 Pro)\*\*
- Windows 7 Professional 64\*
- Windows 7 Professional 32\*
- Windows 7 Enterprise 64\*
- Windows 7 Enterprise 32\*

\* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://http://www.microsoft.com>

\*\* This system is preinstalled with Windows 7 Professional software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

\*\*\*This system is preinstalled with Windows 7 Professional software and also comes with a license and media for Windows 10 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

#### PROCESSOR



### Features

5<sup>th</sup> Generation Intel® Core™ i3-5010U 2.1-GHz 3-MB L3 Cache, 15W

5<sup>th</sup> Generation Intel® Core™ i5-5200U 2.2-GHz (max turbo frequency 2.7-GHz), 3 MB L3 cache, 15W

5<sup>th</sup> Generation Intel® Core™ i5-5300U 2.3-GHz (max turbo frequency 2.9-GHz), 3 MB L3 Cache, 15W

5<sup>th</sup> Generation Intel® Core™ i7-5500U 2.4-GHz (max turbo frequency 3.0-GHz), 4 MB L3 Cache, 15W

5<sup>th</sup> Generation Intel® Core™ i7-5600U 2.6-GHz (max turbo frequency 3.2-GHz), 4 MB L3 Cache, 15W

\* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

\*\* Not available with Intel iAMT (\*Not available with vPro)

**NOTE:** Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

### INTEL TURBO BOOST TECHNOLOGY\*

Intel Turbo Boost is a feature that speeds up the CPU for a short time. It is similar to overclocking the processor, except within a framework provided by Intel. This feature provides additional performance and allows the computer to perform certain tasks more quickly. It also draws additional power and generates additional heat. Therefore, if Turbo Boost is used while powered from battery, it causes additional stress on the battery.

Using Turbo Boost while powered from battery might impact battery cycle life. Cycle life describes how long the battery will last before it needs to be replaced. A cycle refers to one complete charge/discharge cycle of the battery. Because Turbo Boost causes extra stress on the battery, it often shortens the lifetime of the battery.

HP decided not to enable Turbo Boost when powered from battery. This decision was based on the desire to give customers the greatest battery cycle life possible. Turbo Boost is enabled when powered from AC adapter.

Based on customer requests, HP will provide an option to enable Turbo Boost while powered from battery. For the 2013 platform, it will be an F10 option. Turbo Boost will be available for devices powered from battery by the end of the year. The additional performance might cause a slight reduction in battery cycle life, but will not void the battery warranty.

\*Implementing Turbo Boost in F10 option is only allowed for batteries over 40Whr. Intel® Turbo Boost technology requires a PC with a processor with Intel Turbo Boost capability. Intel Turbo Boost performance varies depending on hardware, software and overall system configuration. See <http://www.intel.com/technology/turboboost> for more information.

### CHIPSET

Chipset integrated with processor

### INTEL CORE I5 WITH vPRO/CORE I7 WITH vPRO TECHNOLOGY CAPABLE

Intel Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with select processors, an Intel Centrino® Advanced-N or Ultimate-N WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology 9.0 (iAMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off\* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.



### Features

\*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

**NOTE:** Some functionality of this technology, such as Intel® Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependent on 3rd party software providers. Microsoft Windows required.

### GRAPHICS

Integrated:

Intel® HD\* Graphics 5500

Discrete

AMD Radeon™ R7 M260X\*, with 1 GB dedicated DDR5 video memory\*\*

\*HD content required to view HD images.

\*\*AMD Dynamic Switchable Graphics technology requires an Intel processor, plus an AMD Radeon™ discrete graphics configuration and is not available on FreeDOS and Linux OS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be).

### DISPLAY

#### Internal

##### Non Touch

15.6" diagonal LED-backlit HD anti-glare SVA flat (1366x768)

15.6" diagonal LED-backlit HD anti-glare SVA flat (1366x768) with camera

15.6" diagonal LED-backlit FHD anti-glare SVA Slim (1920x1080)

15.6" diagonal LED-backlit FHD anti-glare SVA Slim (1920x1080) with camera

##### Touch

15.6" FHD diagonal LED-backlit SVA Slim (1920x1080) with camera

Touch panel has chemically-strengthened Corning® Gorilla® Glass 3 top cover

#### External

Up to 32-bit per pixel color depth

#### VGA

Port supports resolutions up to 1920 x 1200 external resolution@75 Hz

#### DisplayPort

Supports resolutions up to 3840 x 2160 @ 60Hz. Supports Multi-Stream Transport (MST) where three displays can be daisy chained with digital displays through DisplayPort Only. The full resolution of each display will be limited as you reach 3 displays due to the bandwidth limitations with a maximum resolution of:

- 2560x1600@60Hz for 2 displays
- 1920x1200@60Hz for 3 displays



### Features

**Number of Displays supported**

3 With Optional UltraSlim Docking Station  
Sold separately.

### STORAGE AND DRIVES

**Primary Storage Bay****Hard Drives\***

320 GB 7200rpm SATA Hard Drive  
500 GB 7200rpm SATA Hard Drive  
500 GB 7200rpm Self-Encrypting Drive  
500 GB 5400rpm Self-Encrypting Drive (FIPS-140-2)  
1TB 7200rpm SATA Hard Drive

**Solid State Drive\***

120 GB M.2 Solid State Drive  
128 GB SATA-3 MLC Solid State Drive  
128 GB SATA-3 TLC Solid State Drive  
180 GB SATA-3 MLC Solid State Drive  
180 GB SATA-3 MLC Self-Encrypting Drive  
240 GB SATA-3 MLC Solid State Drive  
256 GB SATA-3 TLC Solid State Drive  
256 GB SATA-3 MLC Self-Encrypting Drive  
256 GB M.2 PCIe Solid State Drive  
512 GB SATA-3 MLC Solid State Drive  
512 GB SATA-3 TLC Solid State Drive

**HP 3D DriveGuard (Windows only)**

HP 3D DriveGuard mitigates the risk of hard drive failures, safeguarding your data when you are on the go by sensing sudden movement and protecting the hard drive. The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive.

\*For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and up to 30 GB (for Windows 8 and 10) of system disk is reserved for the system recovery software.

### FLASH CACHE

32 GB M.2 (NGFF)

Optional 32 GB M.2 flash cache module support for Intel Smart Response Technology.  
Available only with standard non-SED hard drive.

### MEMORY

**Standard**

DDR3L-1600 (Transfer rates up to 1600 MT/s)  
Two SODIMM slots supporting dual-channel memory  
4 GB Total System Memory (4 GB x 1)  
8 GB Total System Memory (4 GB x 2) (Not available with Windows 7 Professional 32)  
8 GB Total System Memory (8 GB x 1) (Not available with Windows 7 Professional 32)  
16 GB Total System Memory (8 GB x 2) (Not available with Windows 7 Professional 32)





### Features

#### Maximum

Upgradeable to 16 GB with optional 8 GB SODIMMs in slots 1 and 2\*

#### Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

\* Maximum memory capacities assume Windows 64-bit operating systems or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

### NETWORKING/COMMUNICATIONS

#### Wireless

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

#### Broadband Wireless (WWAN)\*

HP Lt4112 LTE/HSPA+ Qualcomm® Gobi™ 4G Module

HP Lt4211 LTE/EV-DO/HSPA+ Qualcomm® Gobi™ 4G Module

HP hs3110 HSPA+ Mobile Broadband Module

\* WWAN is an optional feature sold separately or as an add on feature. WWAN connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

\*\* 4G LTE WWAN is an optional feature, not available on all products, in all regions and requires separately purchased service contract. Check with service provider for coverage and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

#### Wireless LAN (WLAN)\*

Intel® Dual Band Wireless-AC 7265 802.11 ac (2X2) Wi-Fi + Bluetooth®

Intel® Dual Band Wireless-7265AN 802.11 a/b/g/n (2X2) Wi-Fi + Bluetooth®

Intel® Dual Band Wireless-AC 3160 802.11 ac (1x1) Wi-Fi + Bluetooth®

\*Wireless access point and Internet service is required and is not included. Availability of public wireless access points limited.

#### Communications

Intel® I218LM Gigabit\* Network Connection (10/100/1000 NIC)

\* The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

Optional Near Field Communication (NFC)

### AUDIO/MULTIMEDIA

#### Audio

HD Audio with DTS Studio Sound™



### Features

2 Integrated stereo speakers  
Integrated dual-microphone array; located in the display  
Function keys for microphone mute, volume up, volume down  
Stereo headphone/line out  
Stereo microphone/line in

#### Webcam

Optional\* 720p HD\*\* webcam

- HD format (widescreen)
- Supports videoconferencing (non-HD) and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range
- Skype-ready \*\*\*

\*Sold separately or as an optional feature.

\*\* HD content required to view HD images.

\*\*\*Internet access required.

### KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

#### Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and includes an all-metal keyboard deck for greater rigidity, as well as HP DuraKeys. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, and function keys. US and International key layouts are available. Backlit keyboard available as an option.

#### Pointing Devices

Touchpad with scroll zone, on/off button with LED indicator, two-way scroll, two pick buttons

#### Buttons and Function Keys

Separate discrete buttons provide easy access to WLAN on/off and speaker mute. Function keys provide control of features including: standby mode, display brightness, external display, microphone mute, volume down, and volume up.

\* In independent testing conducted by Trace Laboratories, HP DuraKeys showed no wear after 250,000 cycles. Competitor notebooks showed significant wear after only 5,000 cycles.)

### SOFTWARE AND SECURITY

#### Preinstalled Software with Windows Operating System

##### BIOS

HP BIOSphere\*

HP Sure Start

HP DriveLock | HP Automatic Drive Lock

HP BIOS Protection\*\*\*

HP Disk Sanitizer \*\*\*\*

HP SpareKey\*\*\*\*\*



### Features

Update via Network  
Master Record Security  
Power On Authentication  
Pre-Boot Security  
Secure Erase\*\*\*\*\*  
Hybrid Boot  
Measured Boot  
Secure Boot  
Absolute Persistence Module\*\*\*\*\*

\* Available only on business PCs with HP BIOS.

\*\*\* May require a manual recovery step if all copies of BIOS are compromised or deleted.

\*\*\*\* For the use cases outlined in the DOD 5220.22-M Supplement. Does not support solid state drives.

\*\*\*\*\* Requires initial user set up.

\*\*\*\*\* For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.

\*\*\*\*\* Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription.

Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

#### MultiMedia

CyberLink PowerDVD  
CyberLink YouCam BE

#### Communication

HP Connection Manager (Windows 7 only)  
HP GPS and Location\*  
HP Mobile Connect (Windows 8 only)\*\*  
HP Wireless Hotspot\*\*\* (Windows 8 only)  
Intel WiDi Software\*\*\*\*  
Intel My WiFi and Wireless Drivers

#### HP Value Add Software

Getting Started with Windows 8  
HP 3D DriveGuard (Windows required)  
HP ePrint Driver (HP Exclusive)\*\*\*\*\*  
HP Hotkey Support  
HP PageLift  
HP Recovery Manager (Windows 7 only)  
HP Support Assistant  
HP Recovery Disc Creator (Windows 7 only)  
UEFI System Diagnostics W8

#### 3<sup>rd</sup> Party

Adobe® Flash Player (Commercial)  
Foxit PhantomPDF Express for HP  
Bing Search  
Skype\*\*\*\*\*  
Buy Office



### Features

**NOTE:** HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk is reserved for the system recovery software.

\*GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.

\*\* HP Mobile Connect is only available on selective devices with wwan. For geographical availability refer to <http://www.hp.com/go/mobileconnect>

\*\*\*The wireless hotspot application requires an active internet connection that is shared with the connecting devices. Wireless hotspot data usage may incur additional charges. Check with your service provider for plan details.

\*\*\*\* Integrated Intel Wi-Di feature is available on select configurations only and requires separately purchased projector, tv or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, tv or computer monitor via a standard HDMI cable, also sold separately.

\*\*\*\*\*Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see [www.hp.com/go/businessmobileprinting](http://www.hp.com/go/businessmobileprinting)).

\*\*\*\*\* Skype is not offered in China.

#### Manageability

HP Driver Packs \*

HP SoftPaq Download Manager (SDM)\*

HP System Software Manager (SSM)\*

HP BIOS Config Utility (BCU) \*

HP Client Catalog / HP CIK for Microsoft SCCM \*

LANDESK Management \*

\* Not preinstalled

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

#### Standard Security Features

HP Client Security with Credential Manager and Password Manager (Windows only)

HP Device Access Manager with Just in Time Authentication

HP Drive Encryption (FIPS 140-2 certified)\*

HP File Sanitizer\*\*

Microsoft Security Essentials (Windows 7 only)\*\*\*

Central Management of Client Security Credential Manager with DigitalPersona Pro Workgroup\*\*\*\*\*

Computrace Support

#### Security Hardware

TPM Embedded Security Chip 1.2

Security lock slot

Fingerprint Reader

Integrated Smart Card Reader

**NOTE:** The Absolute Persistence agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S.

\* Requires Windows. Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.



### Features

\*\* For the use cases outlined in the DOD 5220.22-M Supplement. Supports standard Hard Drives. Initial setup required.

\*\*\* Opt in and internet connection required for updates.

\*\*\*\* In order to deploy and receive updated policies, the client needs to be connected to the network server and requires separately purchased DigitalPersona Pro software. System access may not prevent users from logging into the system on the first attempt if policy updates haven't yet been received and applied. Not all features are remotely manageable.

\*\*\*\*\* Intel Anti-Theft security is supported on Intel Core i processors and requires a separately purchased Absolute Computrace service subscription and must be activated and configured. Check with Absolute for availability in your country. Intel and HP assume no liability for lost or stolen data and/or systems or any other damages resulting therefrom. See <http://www.intel.com/technology/anti-theft/>.

\*\*\*\*\* Intel Identity Protection feature is only available with Intel Core Processors. Intel® IPT security requires separate Symantec VIP software service subscription and must be activated and configured. Requires a website that uses Symantec VIP Authentication Service and Microsoft® Windows. Intel® and HP assume no liability for lost or stolen data and/or systems or any other damages resulting therefrom.

For more information on HP security solutions refer to: <http://www.hp.com/go/protecttools>.

### POWER

#### Power Supply

HP 45W Smart AC Adapter

45W 2-prong 7.4mm DC jack AC Adapter (Only for Japan)

HP 65W Smart AC Adapter

HP 65W Smart EM AC Adapter (China and India only)

Power cord is configurable; either 3.2 feet or 6 feet (1.0 or 1.8 meter)

Total length including external AC adapter is 9.2 feet or 12 feet (2.86 or 3.66 meter).

#### Primary Battery

3-cell HP Long Life Polymer 24 WHr

3-cell HP Long Life Polymer 50 WHr

#### Battery Life\*

Hardware details	Battery	With UMA Graphics	With Discrete Graphics
HDD	3-cell (50 WHr)	Up to 12 hrs 15 mins	Up to 12 hrs 45 mins
SSD	3-cell (24 WHr)	Up to 7 hrs 30 mins	Up to 7 hrs
SSD	3-cell (50 WHr)	Up to 15 hrs 30 mins	Up to 15 hrs 15 mins

\*Windows 7 MM07 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See <http://www.bapco.com> for additional details.

#### System Standby Time\*\*

**With UMA Graphics**  
Up to 180 hrs

**With Discrete Graphics**  
Up to 171 hrs



### Features

\*\*Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

#### Power Conservation

Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)

AMD PowerPlay technology (discrete models)

Hibernation

Standby

ACPI compliance

### WEIGHTS & DIMENSIONS

#### Weight

##### Non Touch

Starting at 4.02 lb/1.83 kg

Weight will vary by configuration.

3-cell (24Whr) battery, HD panel, UMA, no FPR, one SODIMM, WLAN, lightest M.2 SSD primary storage module, no camera, no WWAN

##### Touch

Starting at 4.54 lb/2.06 kg

Weight will vary by configuration.

3-cell (24Whr) battery, FHD Touch panel, UMA, no FPR, one SODIMM, WLAN, lightest M.2 SSD primary storage module, no camera, no WWAN

#### Dimensions (w x d x h)

##### Non Touch

14.78 x 9.98 x 0.84 in (at front)

37.55 x 25.36 x 2.14 cm (at front)

##### Touch

14.78 x 9.98 x 1.02 in (at front)

37.55 x 25.36 x 2.58 cm (at front)

### PORTS/SLOTS

#### Ports

(1) DisplayPort 1.2

(1) USB 3.0 Charging Port

(3) USB 3.0 Port

(1) RJ-45 / Ethernet

(1) Side Docking connector

(1) Secondary battery connector

(1) Headphone/Microphone Combo

(1) AC Port



### Features

**Expansion Slots**

Media Card Reader  
Supports SD, SDHC, SDXC

### SERVICE AND SUPPORT

HP Services offers 3-year, 1-year and 90 day limited warranty options depending on country. Batteries have a default one year limited warranty except for Long Life batteries which will have same 1-year or 3-year limited warranty as the platform. On-site service and extended coverage is also available. HP Care Pack Services are optional extended service contracts that go beyond the standard limited warranties.\* To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/cpc>.

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.  
<http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>

\*HP Care Packs are sold separately. Service levels and response times for HP Care Services may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>



### Technical Specifications

#### SYSTEM UNIT

Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	19.5 V	Windows 7 (64-bit)	Windows 8.1 (64-bit)
	Average Operating Power		4.75 W	4.26 W
	Integrated graphics			
	Max Operating Power	Discrete < 90W		
		UMA < 65W		
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical)		
		41° to 95° F (5° to 35° C) (writing optical)		
	Non-operating	-4° to 140° F (-20° to 60° C)		
Relative Humidity	Operating	10% to 90%, non-condensing		
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature		
Shock	Operating	40 G, 2 ms, half-sine		
	Non-operating	200 G, 2 ms, half-sine		
Random Vibration	Operating	0.75 grms		
	Non-operating	1.50 grms		
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)		
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)		
Planned Industry Standard Certifications	UL	Yes		
	CSA	Yes		
	FCC Compliance	Yes		
	ENERGY STAR®	Select models*		
	EPEAT®	Registered Gold in United States**		
	ICES	Yes		
	Australia / NZ A-Tick Compliance	Yes		
	CCC	Yes		
	Japan VCCI Compliance	Yes		
	KC	Yes		
	BSMI	Yes		
	CE Marking Compliance	Yes		
	BNCI or BELUS	Yes		
	CIT	Yes		
	GOST	Yes		
	Saudi Arabian Compliance (ICCP)	Yes		
	SABS	Yes		
	UKRSERTCOMPUTER	Yes		

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.





### Technical Specifications

#### DISPLAYS

<b>15.6" diagonal LED-backlit HD anti-glare SVA flat (1366 x 768)</b>	<b>Outline Dimensions</b> (W x H x D)	14.17 x 8.83 x 0.15 in (36.0 x 22.43 x 0.38 cm)		
	<b>Active Area</b>	13.55 x 7.62 in (34.42 x 19.35 cm)		
	<b>Weight</b>	< 1.1 lb (500 g) (max)		
	<b>Diagonal Size</b>	15.6 in (39.62 cm)		
	<b>Contrast Ratio</b>	300:1 (min)		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	200 nit (typical)		
	<b>Pixel Resolution</b>	<b>Format</b>	1366 x 768 (HD)	
	<b>Interface</b>	<b>Configuration</b>	RGB Stripe	
	<b>LCD Mode</b>	eDP 1.2 (1 lane)		
	<b>PPI</b>	TN		
<b>Viewing Angle</b>	101 ppi			
	SVA 30/30/20/10 (min) (Left/Right/Down/Up)			

<b>15.6" diagonal LED-backlit FHD anti-glare SVA flat (1920 x 1080)</b>	<b>Outline Dimensions</b> (W x H x D)	14.17 x 8.83 x 0.15 in (36.0 x 22.43 x 0.32 cm)		
	<b>Active Area</b>	13.55 x 7.62 in (34.42 x 19.36 cm)		
	<b>Weight</b>	< 0.84 lb (380 g) (max)		
	<b>Diagonal Size</b>	15.6 in (39.62 cm)		
	<b>Contrast Ratio</b>	300:1 (typical)		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	300 nit (typical)		
	<b>Pixel Resolution</b>	<b>Format</b>	1920 x 1080 (FHD)	
	<b>Interface</b>	<b>Configuration</b>	RGB Stripe	
	<b>LCD Mode</b>	eDP 1.2 (2 lane)		
	<b>PPI</b>	TN		
<b>Viewing Angle</b>	142 ppi			
	SVA 30/30/20/10 (min) (Left/Right/Down/Up)			

<b>15.6" diagonal LED-backlit FHD anti-glare</b>	<b>Outline Dimensions</b> (W x H x D)	14.17 x 8.83 x 0.15 in (36.0 x 22.43 x 0.32 cm)	
	<b>Active Area</b>	13.55 x 7.62 in (34.42 x 19.36 cm)	
	<b>Weight</b>	< 0.84 lb (380 g) (max)	



### Technical Specifications

<b>SVA flat (1920 x 1080) + touch</b>	<b>Diagonal Size</b>	15.6 in (39.62 cm)		
	<b>Touch enabled</b>	Yes		
	<b>TSP Type</b>	Capacitive		
	<b>Touch point supported</b>	Min 5-point & Max 10-point for Win8		
	<b>Contrast Ratio</b>	400:1 (typical)		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	300 nit (typical)		
	<b>Pixel Resolution</b>	<b>Format</b>	1920 x 1080 (FHD)	
		<b>Configuration</b>	RGB Stripe	
	<b>Interface</b>	eDP 1.2 (2 lane)		
<b>LCD Mode</b>	TN			
<b>PPI</b>	142 ppi			
<b>Viewing Angle</b>	SVA 45/45/25/35 (Left/Right/Down/Up)			

### STORAGE AND DRIVES

<b>320 GB* 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.21 lbs (95 g)		
	<b>Capacity</b>	320 GB		
	<b>Height</b>	0.28 in (7 mm)		
	<b>Width</b>	2.75 in (69.85 mm)		
	<b>Interface</b>	ATA-8, SATA 3.0		
	<b>Transfer Rate</b>	<b>Synchronous (maximum)</b>	600 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms-2ms	
		<b>Average</b>	12 ms-13ms	
		<b>Maximum</b>	18ms-22 ms	
	<b>Cache</b>	Up to 32 MB		
	<b>Rotational Speed</b>	7200 rpm		
	<b>Logical Blocks</b>	625,142,448		
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]		
<b>Features</b>	ATA Security; S.M.A.R.T. IV, NCQ, Ultra DMA			

<b>500 GB* 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.20lbs(92g- 0.21 lbs (95g))	
	<b>Capacity</b>	500 GB	
	<b>Height</b>	0.28 in (7 mm)	
	<b>Width</b>	2.75 in (69.85 mm)	
	<b>Interface</b>	ATA-8, SATA 3.0	



### Technical Specifications

<b>Transfer Rate</b>	<b>Synchronous</b> (maximum)	600 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms-2ms
	<b>Average</b>	12 ms-13ms
	<b>Maximum</b>	18ms-22 ms
<b>Rotational Speed</b>		7200 rpm
<b>Logical Blocks</b>		976,773,168
<b>Operating Temperature</b>		32° to 140° F (0° to 60° C) [case temp]
<b>Features</b>		ATA Security; S.M.A.R.T.IV, NCQ, Ultra DMA

#### 500 GB\* 5400 rpm SMART SATA II FIPS Self Encrypting Drive

<b>Drive Weight</b>		0.21 lbs (95g)
<b>Capacity</b>		500 GB
<b>Height</b>		0.28 in (7 mm)
<b>Width</b>		2.75 in (69.85 mm)
<b>Interface</b>		ATA-8, SATA 3.0
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum)	600 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms
	<b>Average</b>	12 ms
	<b>Maximum</b>	22 ms
<b>Cache</b>		32 MB
<b>Rotational Speed</b>		5400 rpm
<b>Logical Blocks</b>		976,773,168
<b>Operating Temperature</b>		32° to 140° F (0° to 60° C) [case temp]
<b>Features</b>		ATA Security; TCG Opal 2.x, FIPS

#### 1 TB\* 7200 rpm SATA Hard Drive

<b>Drive Weight</b>		0.25 lb (115 g)
<b>Capacity</b>		1 TB
<b>Height</b>		0.37 in (9.5 mm)
<b>Width</b>		2.75 in (69.85 mm)
<b>Interface</b>		ATA-8, SATA 3.0
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum)	600 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	2 ms
	<b>Average</b>	13 ms
	<b>Maximum</b>	15 ms
<b>Rotational Speed</b>		7200 rpm
<b>Logical Blocks</b>		1,953,525,168
<b>Operating Temperature</b>		32° to 140° F (0° to 60° C) [case temp]
<b>Features</b>		ATA Security; S.M.A.R.T. IV, NCQ, Ultra DMA



### Technical Specifications

<b>500 GB 5400rpm + 8GB NAND SATA Hybrid Hard Drive</b>	<b>Drive Weight</b>	<b>95g</b>		
	<b>Capacity</b>	<b>500GB</b>		
	<b>Height</b>	<b>7mm</b>		
	<b>Width</b>	<b>70.1mm</b>		
	<b>Interface</b>	<b>ATA-8, SATA 3.0</b>		
	<b>Transfer Rate</b>	<b>600MB/s</b>		
	<b>Seek Time</b> (typical reads, including settling)	<b>5.6ms (Average Latency)</b>		
	<b>Rotational Speed</b>	<b>5400rpm</b>		
	<b>Logical Blocks</b>	<b>976,733,168</b>		
	<b>Operating Temperature</b>	<b>0-60 degree C</b>		
	<b>Features</b>	<b>ATA Security, S.M.A.R.T., NCQ, Ultra DMA</b>		
<b>SATA 3 Gb/s 32 GB*, M.2 2242 Solid State Drive</b>	<b>Drive Weight</b>	10 Grams		
	<b>Capacity</b>	32 GB		
	<b>Height</b>	0.09 in (3.7 mm)		
	<b>Width</b>	0.87 in (22 mm)		
	<b>Interface</b>	ATA-8, SATA 3.0		
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>	
		Up to 380 MB/s	Up to 110 MB/s	
	<b>Logical Blocks</b>	62,533,296		
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]		
	<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP		
<b>SATA 3 Gb/s 120 GB*, M.2 2242 Solid State Drive</b>	<b>Drive Weight</b>	10 Grams		
	<b>Capacity</b>	120 GB		
	<b>Height</b>	0.09 in (3.7 mm)		
	<b>Width</b>	0.87 in (22 mm)		
	<b>Interface</b>	ATA-8, SATA 3.0		
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>	
		Up to 540 MB/s	Up to 480 MB/s	
	<b>Logical Blocks</b>	234,441,648		
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]		
	<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP		



### Technical Specifications

#### SATA 3 Gb/s 128 GB\*, 2.5-inch MLC Solid State Drive

<b>Drive Weight</b>	78 Grams	
<b>Capacity</b>	128 GB	
<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 3.0	
<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
	Up to 550 MB/s	Up to 350 MB/s
<b>Logical Blocks</b>	250,069,680	
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	

#### SATA 3 Gb/s 128 GB\*, 2.5-inch TLC Solid State Drive

<b>Drive Weight</b>	78 Grams	
<b>Capacity</b>	128 GB	
<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 3.0	
<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
	Up to 520 MB/s	Up to 140 MB/s
<b>Logical Blocks</b>	250,069,680	
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	

#### SATA 3 Gb/s 180 GB\*, 2.5-inch SATA Solid State Drive

<b>Drive Weight</b>	78 Grams	
<b>Capacity</b>	180 GB	
<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 3.0	
<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
	Up to 540 MB/s	Up to 490 MB/s
<b>Logical Blocks</b>	351,651,888	
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	

#### SATA 3 Gb/s 180 GB\*, 2.5-inch SATA SED Solid State Drive

Up to 78 Grams



### Technical Specifications

<b>Capacity</b>	180 GB	
<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 3.0	
<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
	Up to 540 MB/s	Up to 490 MB/s
<b>Logical Blocks</b>	351,651,888	
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP; TCG Opal 1x	

#### SATA 3 Gb/s 240 GB\*, 2.5-inch Solid State Drive

<b>Drive Weight</b>	78 Grams	
<b>Capacity</b>	240 GB	
<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 3.0	
<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
	Up to 540 MB/s	Up to 490 MB/s
<b>Logical Blocks</b>	468,862,128	
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	

#### SATA 3 Gb/s 256 GB\*, 2.5-inch Solid State Drive

<b>Drive Weight</b>	78 Grams	
<b>Capacity</b>	256 GB	
<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA8, SATA 3.0	
<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
	Up to 520 MB/s	Up to 280 MB/s
<b>Logical Blocks</b>	500,118,192	
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
<b>Features</b>	ATA Security; TCG Opal 2.x; DIPM; TRIM; DEVSLP	



### Technical Specifications

<b>SATA 3 Gb/s 256 GB*, 2.5-inch Self Encrypting Solid State Drive</b>	<b>Drive Weight</b>	78 Grams	
	<b>Capacity</b>	256 GB	
	<b>Height</b>	0.28 in (7 mm)	
	<b>Width</b>	2.75 in (69.85 mm)	
	<b>Interface</b>	ATA8, SATA 3.0	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 550 MB/s	Up to 500 MB/s
	<b>Logical Blocks</b>	500,118,192	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
	<b>Features</b>	ATA Security; TCG Opal 2.x; DIPM; TRIM; DEVSLP	

<b>SATA 3 Gb/s 256 GB*, 2.5-inch M2 PCIe Solid State Drive</b>	<b>Drive Weight</b>	10 Grams	
	<b>Capacity</b>	256 GB	
	<b>Height</b>	0.24 in (60 mm)	
	<b>Width</b>	0.87 in (22 mm)	
	<b>Interface</b>	ATA-8, PCIe 2.0	
	<b>Performance</b>	<b>Maximum Read</b>	<b>Sequential Maximum Sequential Write</b>
		Up to 730 MB/s	620 MB/s
	<b>Logical Blocks</b>	500,118,192	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
	<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	

<b>SATA 3 Gb/s 512 GB*, 2.5-inch Solid State Drive</b>	<b>Drive Weight</b>	78 Grams	
	<b>Capacity</b>	512 GB	
	<b>Height</b>	0.28 in (7 mm)	
	<b>Width</b>	2.75 in (69.85 mm)	
	<b>Interface</b>	ATA-8, SATA 3.0	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 550 MB/s	Up to 550 MB/s
	<b>Logical Blocks</b>	1,000,215,216	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
	<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	

<b>512 GB SATA-3 TLC Solid State Drive</b>	<b>Drive Weight</b>	78 Grams
	<b>Capacity</b>	512 GB
	<b>Height</b>	0.28 in (7 mm)



### Technical Specifications

<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 3.0	
<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
	Up to 540 MB/s	Up to 500 MB/s
<b>Logical Blocks</b>	1,000,215,216	
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	

### NETWORKING/COMMUNICATIONS

#### Broadband Wireless (WWAN)\*

##### HP It4211 LTE/EV-DO/ HSPA+ Gobi 4G Module

<b>Technology/Operating bands</b>	LTE: 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 700 (Band 13 upper SMH), 700 (Band 17 lower SMH), 1900 MHz (Band 25, extended PCS) MHz HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz EV-DO: 800 (BC0), 1900 (BC1) MHz
<b>Wireless protocol standards</b>	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9 EVDO Release 0 and Release A
<b>GPS</b>	Standalone, A-GPS
<b>GPS bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
<b>Maximum data rates</b>	LTE: 100 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload) CDMA 1x: DL 153.6 kbps/UL 153.6 kbps EVDO Rev.A: DL 3.1 Mbps/UL 1.8 Mbps
<b>Maximum output power</b>	LTE: 23 dBm HSPA+: 23.5 dBm E-GPRS 1900/1800: 26.5 dBm E-GPRS 900/850: 27.5 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm CDMA/EVDO: 24dBm
<b>Maximum power consumption</b>	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average)





### Technical Specifications

	E-GPRS: 2,800 mA (peak); 700 mA (average) EVDO: 1000mA (peak); 720mA (average)
<b>Form Factor</b>	M.2, 3042-S3 Key B
<b>Weight</b>	6 g
<b>Dimensions</b> (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)
<b>HP It4112 LTE/HSPA+ Gobi 4G Module**</b>	<p><b>Technology/Operating bands</b> LTE FDD all bands with diversity: 2100 MHz (Band I), 1900 MHz (Band II), 1800 MHz (Band III), 850 MHz (Band V), 2600 MHz (Band VII), 900 MHz (Band VIII), 800 MHz (Band XX, DD800) WCDMA/HSDPA/HSUPA/HSPA+ all bands with diversity: 2100 MHz (Band I), 1900 MHz (Band II), 800 MHz (Band V), 900 MHz (Band VIII) GSM/GPRS/EDGE: 1900 MHz (Band II), 1800 MHz (Band III), 850 MHz (Band V), 900 MHz (Band VIII)</p> <p><b>Wireless protocol standards</b> 3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification</p> <p><b>Wireless parametric standards</b> Complies with 3GPP specifications Release 8 for LTE</p> <p><b>Maximum data rates</b> LTE (Category 3): 100 Mbps (Download), 50Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)</p> <p><b>GPS</b> Standalone</p> <p><b>GPS bands</b> 1575.42 MHz (± 1.023 MHz), GLONASS 1596-1607MHz</p> <p><b>Maximum output power</b> LTE: +23 dBm (+/- 2 dBm) WCDMA: +23.5 dBm (+/- 1 dBm) GPRS Band II, III: +29.5 dBm (+/- 1 dBm) GPRS Band V, VIII: +32.5 dBm (+/- 1 dBm) EGPRS Band II, III: +26.5 dBM (+/-1.5 dBm) EGPRS Band V, VIII: +27.5 dBM (+/-1.5 dBm)</p> <p><b>Maximum power consumption</b> LTE: 1,200 mA (peak); &lt;900 mA (average) WCDMA: 1,100 mA (peak); &lt;800 mA (average) EGPRS: 2,800 mA (peak); &lt;700 mA (average)</p> <p><b>Power consumption, sleep mode</b> 3 mA</p> <p><b>Power management</b> USB selective suspend, Integrated notebook wireless button</p> <p><b>Antenna type</b> Dual high efficiency multi-band antennae with spatial diversity</p> <p><b>Form Factor</b> M.2, USB 2.0 interface</p> <p><b>Weight</b> 6 g</p> <p><b>Dimensions</b> (Length x Width x Thickness) 42 mm × 30 mm × 2.3 mm</p> <p><b>Voltage, Operating</b> 3.135 V to 4.4 V (3.3 V +1.1V/-0.165V)</p>



### Technical Specifications

<b>Temperature, operating</b> (from TIA/EIA/IS-98-D)	14° to 131° F (–10° to 55° C)
<b>Temperature, non-operating, 96 hours</b> (from MIL-STD 202 Method 108)	–40° to 185° F (–40° to 85° C)
<b>Humidity, non-operating</b>	95% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
<b>LED activity</b>	LED Off - Radio Off; Solid LED On - Radio On

\* 4G LTE not available on all products, in all regions and only available on products featuring Intel processors. WWAN use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors.

#### HP hs3110 HSPA+ Mobile Broadband Module

<b>Technology/Operating bands</b>	HSPA+: 2100 (Band 1), 1900 (Band 2), 850 (Band 5), 700 (Band 17) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
<b>Wireless protocol standards</b>	WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9
<b>GPS</b>	Standalone, A-GPS
<b>GPS bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
<b>Maximum data rates</b>	DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
<b>Maximum output power</b>	HSPA+: 23.5 dBm E-GPRS 1900/1800: 26.5 dBm E-GPRS 900/850: 27.5 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm
<b>Maximum power consumption</b>	HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average)
<b>Form Factor</b>	M.2, 3042-S3 Key B
<b>Weight</b>	6g
<b>Dimensions</b> (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

#### Wireless LAN (WLAN)

Intel® 802.11 a/b/g/n ac (2X2) + Bluetooth®

**Wireless LAN Standards** IEEE 802.11a



### Technical Specifications

<b>Interoperability Frequency Band</b>	<p>IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac Wi-Fi certified 802.11b/g/n</p> <ul style="list-style-type: none"> <li>• 2.402 – 2.482 GHz</li> </ul> <p>Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p> <p>802.11a</p> <ul style="list-style-type: none"> <li>• 4.9 – 4.95 GHz (Japan)</li> <li>• 5.15 – 5.25 GHz</li> <li>• 5.25 – 5.35 GHz</li> <li>• 5.47 – 5.725 GHz</li> <li>• 5.825 – 5.850 GHz</li> </ul> <p>Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)</p>
<b>Data Rates</b>	<p>802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</p>
<b>Modulation</b>	<p>Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM</p>
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul>
<b>Network Architecture Models Roaming Output Power<sup>2</sup></b>	<p>Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) IEEE 802.11 compliant roaming between access points 802.11b : +16dBm minimum 802.11g : +14dBm minimum 802.11a : +14dBm minimum 802.11n HT20(2.4GHz) : +13dBm minimum 802.11n HT40(2.4GHz) : +13dBm minimum 802.11n HT20(5GHz) : +12dBm minimum 802.11n HT40(5GHz) : +12dBm minimum 802.11ac 80MHz(5GHz) : +11dBm minimum</p>
<b>Power Consumption</b>	<p>Transmit: 2.0 W (max)</p>



### Technical Specifications

	Receive: 1.6 W (max)
	Idle mode (PSP): 180 mW (WLAN Associated)
	Idle mode: 60 mW (WLAN unassociated)
	Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management
	802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>3</sup></b>	802.11b, 1Mbps : -94dBm maximum
	802.11b, 11Mbps : -86dBm maximum
	802.11g, 6Mbps : -88dBm maximum
	802.11g, 54Mbps : -74dBm maximum
	802.11a, 6Mbps : -86dBm maximum
	802.11a, 54Mbps : -72dBm maximum
	802.11n, MCS07 : -69dBm maximum
	802.11n, MCS15 : -66dBm maximum
	802.11ac, 1SS, MCS-0 : -86dBm maximum
	802.11ac, 1SS, MCS-9 : -61dBm maximum
	802.11ac, 2SS, MCS-0 : -83dBm maximum
	802.11ac, 2SS, MCS-9 : -58dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure
	Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm
	Or
	Type 1630 : 2.3 x 16.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g
	Or
	Type 1630 : 2g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating 14° to 158° F (-10° to 70° C)
	Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing)
	Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m)
	Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON
	1. Check latest software/driver release for updates on supported security features.
	2. Maximum output power may vary by country according to local regulations.
	3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

#### HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

<b>Bluetooth Specification</b>	4.0+EDR Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	79 (1 MHz) available channels
<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric



### Technical Specifications

**Transmit Power**

The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.

**Receiver Sensitivity**

Modulation	0.01% BER	0.001% BER
GFSK	-80 dBm	-70 dBm
$\pi/4$ -DQPSK	-80 dBm	-70 dBm
8DPSK	-80 dBm	-70 dBm

**Power Consumption**

Peak (Tx) 330 mW  
 Peak (Rx) 230 mW  
 Selective Suspend 17 mW

**Range**

Up to 33 ft (10 m)

**Electrical Interface**

USB 2.0 compliant

**Bluetooth Software Supported Link Topology**

Microsoft Windows Bluetooth Software

**Electrical Interface**

Point to Point, Multipoint Pico Nets up to 7 slaves

**Bluetooth Software Supported Security**

Full support of Bluetooth Security Provisions

**Power Management**

Microsoft Windows ACPI, and USB Bus Support

**Power Management**

Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

**Certifications**

All necessary regulatory approvals for supported countries, including:

**Security**

FCC (47 CFR) Part 15C, Section 15.247 & 15.249

**Certifications**

**Bluetooth Profiles Supported**

ETS 300 328, ETS 300 826  
 Low Voltage Directive IEC950  
 UL, CSA, and CE Mark  
 Serial Port Profile (SPP)<sup>1</sup>  
 Service Discovery Application Profile (SDAP)  
 Dial-Up Networking (DUN)<sup>1,2</sup>  
 Generic Object Exchange Profile (GOEP)<sup>1,2</sup>  
 Object Push Profile (OPP)<sup>1,2</sup>  
 File Transfer Profile (FTP)  
 Synchronization Profile (SYNC)  
 Hard Copy Cable Replacement (HCRP)<sup>1,2</sup>  
 Personal Area Networking Profile (PAN)<sup>1,2</sup>  
 Human Interface Device Profile (HID)<sup>1,2</sup>  
 FAX Profile (FAX)  
 Basic Imaging Profile (BIP)<sup>2</sup>  
 Headset Profile (HSP)  
 Hands Free Profile (HFP)  
 Advanced Audio Distribution Profile (A2DP)

**Power Management**

**Certifications**

**Certifications**

**Certifications**

**Bluetooth Profiles Supported**

**Intel® 802.11 a/b/g/n (2X2) +Bluetooth®**

**Wireless LAN Standards**

IEEE 802.11a  
 IEEE 802.11b  
 IEEE 802.11g  
 IEEE 802.11n

**Interoperability**

Wi-Fi certified



### Technical Specifications

<b>Frequency Band</b>	802.11b/g/n <ul style="list-style-type: none"><li>2.402 – 2.482 GHz</li></ul> Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
	802.11a <ul style="list-style-type: none"><li>4.9 – 4.95 GHz (Japan)</li><li>5.15 – 5.25 GHz</li><li>5.25 – 5.35 GHz</li><li>5.47 – 5.725 GHz</li><li>5.825 – 5.850 GHz</li></ul> Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)
<b>Antenna Structure</b>	2 transmit; 2 receive (2x2)
<b>Data Rates</b>	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
<b>Modulation</b>	Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"><li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li><li>AES-CCMP: 128 bit in hardware</li><li>802.1x authentication</li><li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li><li>WPA2 certification</li><li>IEEE 802.11i</li><li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li><li>WAPI</li></ul>
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Network Architecture</b>	Ad-hoc (Peer to Peer)
<b>Models</b>	Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between band Access Points
<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"><li>802.11b : +16dBm minimum</li><li>802.11g : +14dBm minimum</li><li>802.11a : +14dBm minimum</li><li>802.11n HT20(2.4GHz) : +13dBm minimum</li><li>802.11n HT40(2.4GHz) : +13dBm minimum</li><li>802.11n HT20(5GHz) : +12dBm minimum</li><li>802.11n HT40(5GHz) : +12dBm minimum</li></ul>
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max)



### Technical Specifications

<b>Power Management</b>	<p>Idle mode (PSP): 180 mW (WLAN Associated)          Idle mode: 60 mW (WLAN unassociated)          Radio disabled: 30 mW          ACPI and PCI Express compliant power management          802.11 compliant power saving mode</p>
<b>Receiver Sensitivity<sup>4</sup></b>	<p>802.11b, 1Mbps : -94dBm maximum          802.11b, 11Mbps : -86dBm maximum          802.11g, 6Mbps : -88dBm maximum          802.11g, 54Mbps : -74dBm maximum          802.11a, 6Mbps : -86dBm maximum          802.11a, 54Mbps : -72dBm maximum          802.11n, MCS07 : -69dBm maximum          802.11n, MCS15 : -66dBm maximum</p>
<b>Antenna type</b>	<p>High efficiency antenna with spatial diversity, mounted in the display enclosure          Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO and Bluetooth communications</p>
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	<p>Type 2230 : 2.3 x 22.0 x 30.0 mm          Or          Type 1630 : 2.3 x 16.0 x 30.0 mm</p>
<b>Weight</b>	<p>Type 2230 : 2.8g          Or          Type 1630 : 2g</p>
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	<p>Operating 14° to 158° F (-10° to 70° C)          Non-operating -40° to 176° F (-40° to 80° C)</p>
<b>Humidity</b>	<p>Operating 10% to 90% (non-condensing)          Non-operating 5% to 95% (non-condensing)</p>
<b>Altitude</b>	<p>Operating 0 to 10,000 ft (3,048 m)          Non-operating 0 to 50,000 ft (15,240 m)</p>
<b>LED Activity</b>	LED Amber - Radio OFF; LED White - Radio ON
	<p>1. Check latest software/driver release for updates on supported security features.          2. Maximum output power may vary by country according to local regulations.          3. In Power Save Polling mode and on battery power.          4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).          5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</p>
<b>HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology</b>	
<b>Bluetooth Specification</b>	4.0+EDR Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	79 (1 MHz) available channels
<b>Data Rates and Throughput</b>	<p>3 Mbps data rate; throughput up to 2.17 Mbps          Synchronous Connection Oriented links up to 3, 64 kbps, voice channels</p>



### Technical Specifications

<b>Transmit Power</b>	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric												
<b>Receiver Sensitivity</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.												
<b>Power Consumption</b>	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td><math>\pi/4</math>-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER											
GFSK	-80 dBm	-70 dBm											
$\pi/4$ -DQPSK	-80 dBm	-70 dBm											
8DPSK	-80 dBm	-70 dBm											
<b>Range</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW Up to 33 ft (10 m)												
<b>Electrical Interface</b>	USB 2.0 compliant												
<b>Bluetooth Software Supported</b>	Microsoft Windows Bluetooth Software												
<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves												
<b>Electrical Interface</b>	Full support of Bluetooth Security Provisions												
<b>Bluetooth Software Supported</b>	Microsoft Windows ACPI, and USB Bus Support												
<b>Security</b>	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff												
<b>Certifications</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249												
<b>Bluetooth Profiles Supported</b>	ETS 300 328, ETS 300 826												
<b>Power Management</b>	Low Voltage Directive IEC950												
<b>Certifications</b>	UL, CSA, and CE Mark												
<b>Security</b>	Serial Port Profile (SPP) <sup>1</sup>												
<b>Certifications</b>	Service Discovery Application Profile (SDAP)												
<b>Bluetooth Profiles Supported</b>	Dial-Up Networking (DUN) <sup>1,2</sup>												
<b>Power Management</b>	Generic Object Exchange Profile (GOEP) <sup>1,2</sup>												
<b>Certifications</b>	Object Push Profile (OPP) <sup>1,2</sup>												
<b>Bluetooth Profiles Supported</b>	File Transfer Profile (FTP)												
<b>Power Management</b>	Synchronization Profile (SYNC)												
<b>Certifications</b>	Hard Copy Cable Replacement (HCRP) <sup>1,2</sup>												
<b>Bluetooth Profiles Supported</b>	Personal Area Networking Profile (PAN) <sup>1,2</sup>												
<b>Power Management</b>	Human Interface Device Profile (HID) <sup>1,2</sup>												
<b>Certifications</b>	FAX Profile (FAX)												
<b>Bluetooth Profiles Supported</b>	Basic Imaging Profile (BIP) <sup>2</sup>												
<b>Power Management</b>	Headset Profile (HSP)												
<b>Certifications</b>	Hands Free Profile (HFP)												
<b>Bluetooth Profiles Supported</b>	Advanced Audio Distribution Profile (A2DP)												

**Intel® 802.11 ac (2x2) WiFi +  
Bluetooth® 4.0 combo  
(Indonesia only)**

**Wireless LAN Standards** IEEE 802.11a





### Technical Specifications

<b>Interoperability Frequency Band</b>	<p>IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac Wi-Fi certified 802.11b/g/n</p> <ul style="list-style-type: none"> <li>• 2.402 – 2.482 GHz</li> </ul> <p>Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p> <p>802.11a</p> <ul style="list-style-type: none"> <li>• 4.9 – 4.95 GHz (Japan)</li> <li>• 5.15 – 5.25 GHz</li> <li>• 5.25 – 5.35 GHz</li> <li>• 5.47 – 5.725 GHz</li> <li>• 5.825 – 5.850 GHz</li> </ul> <p>Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)</p>
<b>Data Rates</b>	<p>802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</p>
<b>Modulation</b>	<p>Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM</p>
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul>
<b>Network Architecture Models Roaming Output Power<sup>2</sup></b>	<p>Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) IEEE 802.11 compliant roaming between access points 802.11b : +16dBm minimum 802.11g : +14dBm minimum 802.11a : +14dBm minimum 802.11n HT20(2.4GHz) : +13dBm minimum 802.11n HT40(2.4GHz) : +13dBm minimum 802.11n HT20(5GHz) : +12dBm minimum 802.11n HT40(5GHz) : +12dBm minimum 802.11ac 80MHz(5GHz) : +11dBm minimum</p>
<b>Power Consumption</b>	<p>Transmit: 2.0 W (max)</p>



### Technical Specifications

	Receive: 1.6 W (max)
	Idle mode (PSP): 180 mW (WLAN Associated)
	Idle mode: 60 mW (WLAN unassociated)
	Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management
	802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>3</sup></b>	802.11b, 1Mbps : -94dBm maximum
	802.11b, 11Mbps : -86dBm maximum
	802.11g, 6Mbps : -88dBm maximum
	802.11g, 54Mbps : -74dBm maximum
	802.11a, 6Mbps : -86dBm maximum
	802.11a, 54Mbps : -72dBm maximum
	802.11n, MCS07 : -69dBm maximum
	802.11n, MCS15 : -66dBm maximum
	802.11ac, 1SS, MCS-0 : -86dBm maximum
	802.11ac, 1SS, MCS-9 : -61dBm maximum
	802.11ac, 2SS, MCS-0 : -83dBm maximum
	802.11ac, 2SS, MCS-9 : -58dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure
	Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm
	Or
	Type 1630 : 2.3 x 16.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g
	Or
	Type 1630 : 2g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating 14° to 158° F (-10° to 70° C)
	Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing)
	Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m)
	Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON
	4. Check latest software/driver release for updates on supported security features.
	5. Maximum output power may vary by country according to local regulations.
	6. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

#### HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

<b>Bluetooth Specification</b>	4.0+EDR Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	79 (1 MHz) available channels
<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric



### Technical Specifications

<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.												
<b>Receiver Sensitivity</b>	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td><math>\pi/4</math>-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER											
GFSK	-80 dBm	-70 dBm											
$\pi/4$ -DQPSK	-80 dBm	-70 dBm											
8DPSK	-80 dBm	-70 dBm											
<b>Power Consumption</b>	<p>Peak (Tx) 330 mW                      Peak (Rx) 230 mW                      Selective Suspend 17 mW</p>												
<b>Range</b>	Up to 33 ft (10 m)												
<b>Electrical Interface</b>	USB 2.0 compliant												
<b>Bluetooth Software Supported</b>	Microsoft Windows Bluetooth Software												
<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves												
<b>Electrical Interface</b>	Full support of Bluetooth Security Provisions												
<b>Bluetooth Software Supported</b>	Microsoft Windows ACPI, and USB Bus Support												
<b>Security</b>	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff												
<b>Certifications</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249												
<b>Bluetooth Profiles Supported</b>	ETS 300 328, ETS 300 826												
<b>Power Management</b>	Low Voltage Directive IEC950												
<b>Certifications</b>	UL, CSA, and CE Mark												
<b>Security</b>	Serial Port Profile (SPP) <sup>1</sup>												
<b>Certifications</b>	Service Discovery Application Profile (SDAP)												
<b>Bluetooth Profiles Supported</b>	Dial-Up Networking (DUN) <sup>1,2</sup>												
<b>Power Management</b>	Generic Object Exchange Profile (GOEP) <sup>1,2</sup>												
<b>Certifications</b>	Object Push Profile (OPP) <sup>1,2</sup>												
<b>Bluetooth Profiles Supported</b>	File Transfer Profile (FTP)												
<b>Power Management</b>	Synchronization Profile (SYNC)												
<b>Certifications</b>	Hard Copy Cable Replacement (HCRP) <sup>1,2</sup>												
<b>Bluetooth Profiles Supported</b>	Personal Area Networking Profile (PAN) <sup>1,2</sup>												
<b>Power Management</b>	Human Interface Device Profile (HID) <sup>1,2</sup>												
<b>Certifications</b>	FAX Profile (FAX)												
<b>Bluetooth Profiles Supported</b>	Basic Imaging Profile (BIP) <sup>2</sup>												
<b>Power Management</b>	Headset Profile (HSP)												
<b>Certifications</b>	Hands Free Profile (HFP)												
<b>Bluetooth Profiles Supported</b>	Advanced Audio Distribution Profile (A2DP)												

### Intel® Dual Band Wireless-AC 3160 802.11 ac (1x1) Wi-Fi + Bluetooth®

<b>Wireless LAN Standards</b>	IEEE 802.11a
	IEEE 802.11b
	IEEE 802.11g
	IEEE 802.11n
	IEEE 802.11ac



### Technical Specifications

<b>Interoperability Frequency Band</b>	Wi-Fi certified 802.11b/g/n <ul style="list-style-type: none"><li>2.402 – 2.482 GHz</li></ul> Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels. 802.11a/n <ul style="list-style-type: none"><li>4.9 – 4.95 GHz (Japan)</li><li>5.15 – 5.25 GHz</li><li>5.25 – 5.35 GHz</li><li>5.47 – 5.725 GHz</li><li>5.825 – 5.850 GHz</li></ul> Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)
<b>Data Rates</b>	<ul style="list-style-type: none"><li>802.11b: 1, 2, 5.5, 11 Mbps</li><li>802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li><li>802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li><li>802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li><li>802.11ac : MCS0 ~ MCS7, (1SS) (20MHz, 40MHz, and 80MHz)</li></ul>
<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"><li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li><li>AES-CCMP: 128 bit in hardware</li><li>802.1x authentication</li><li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li><li>WPA2 certification</li><li>IEEE 802.11i</li><li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li><li>WAPI</li></ul>
<b>Network Architecture Models Roaming Output Power<sup>2</sup></b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) IEEE 802.11 compliant roaming between access points <ul style="list-style-type: none"><li>802.11b : +16dBm minimum</li><li>802.11g : +14dBm minimum</li><li>802.11a : +14dBm minimum</li><li>802.11n HT20(2.4GHz) : +13dBm minimum</li><li>802.11n HT40(2.4GHz) : +13dBm minimum</li><li>802.11n HT20(5GHz) : +12dBm minimum</li></ul>



### Technical Specifications

	<ul style="list-style-type: none"> <li>• 802.11n HT40(5GHz) : +12dBm minimum</li> <li>• 802.11ac 80MHz(5GHz) : +11dBm minimum</li> </ul>
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management
<b>Receiver Sensitivity<sup>3</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure  Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON
	7. Check latest software/driver release for updates on supported security features. 8. Maximum output power may vary by country according to local regulations. 9. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).



### Technical Specifications

#### AUDIO/MULTIMEDIA - DTS SOUND+

<b>Hardware</b>	<b>Implementation</b>	Realtek ALC3228 HD
	<b>Function Key Volume Controls</b>	Volume up, volume down, and mute
	<b>Full Duplex</b>	Yes
	<b>Microphone In</b>	Stereo
	<b>Headphone/Line Out</b>	Stereo
	<b>Integrated Microphone</b>	Yes, dual digital microphone array
	<b>Audio Output Quality</b>	<b>Frequency Response</b>
<b>Signal to Noise Ratio</b>		>85 dB
<b>Total Harmonic Distortion</b>		0.01%
<b>Noise Floor</b>		-110 dB
<b>Play/Record Sampling Rate(s)</b>		8 kHz – 48kHz
<b>DAC</b>		16, 20 or 24-bit
<b>ADC</b>		16 or 20-bit
<b>Integrated Stereo Speakers</b>	<b>Power Rating</b>	2 Watts
	<b>Impedance</b>	4 Ohms

#### SECURITY

<b>HP Fingerprint Reader (optional)</b>	<b>Mobile Voltage Operation</b>	3.0V-3.6V
	<b>Operating Temperature</b>	14° – 167°F (-10° – 75°C)
	<b>Current Consumption Image</b>	36 mA peak
	<b>Low Latency Wait for Finger</b>	950 uA
	<b>Capture Rate</b>	6000 lines/sec
	<b>ESD Resistance</b>	IEC 61000-4-2 4B (±15KV)
	<b>Detection Matrix</b>	200*1 (plus another secondary line)
		508 dpi 12*3 mm sensor area

<b>Smart Card Reader</b>	<b>Smart card standard</b>	PC/SC 2.0 for Windows smart card standard
--------------------------	----------------------------	---



### Technical Specifications

<b>Dimensions (L x W x H)</b>	0.41x 0.08 x 0.32 in (10.5 x 2 x 8.2 mm)	
<b>Smart Card support</b>	ISO 7816 Class A and AB smart cards	
<b>Smart Card Interface</b>	Smart Card Interface with T = 0 and T = 1 support Support I2C memory card, SLE4418, SLE4428, SLE4432, SLE4442, SLE4436, SLE5536, SLE6636, AT88SC1608, AT45D041 card and AT45DB041 card via external EEPROM	
<b>Operating systems</b>	No driver is required for this device. Native support is provided by the operating system.	
<b>Power</b>	<b>Normal Mode</b>	With card present, before being suspended: 40.9 mA Without card present, before being suspended: 33.16 mA After being suspended with smart card present: 380 $\mu$ A After being suspended without smart card present: 380 $\mu$ A
	<b>Power Saving Mode</b>	With card present, before being suspended: 40.6 mA Without card present: 380 $\mu$ A After being suspended with smart card present: 380 $\mu$ A
<b>Features</b>	<ul style="list-style-type: none"> <li>• Support single slot</li> <li>• Support T0, T1 protocol</li> <li>• Support I2C memory card, SLE4418, SLE4428, SLE4432, SLE4442, SLE4436,</li> <li>• SLE5536, SLE6636, AT88SC1608, AT45D041 card and AT45DB041 card via external EEPROM</li> <li>• Support ISO7816 Class A, B and C (5V/3V/1.8V) card</li> <li>• Implemented as an USB full speed device with bulk transfer endpoint, Mass</li> <li>• Storage endpoint</li> <li>• Built-in PLL for USB and Smart Card clocks requirement</li> <li>• Support EEPROM for USB descriptors customization (PID/VID/iManufacturer/iProduct/Serial Number), Direct Web Page Link, and accessing memory card module.</li> <li>• EEPROM programmable via USB interface</li> <li>• Support software update for memory card module</li> <li>• Support Direct Web Page Link via configuration in external EEPROM</li> <li>• Support short APDU and extended APDU</li> <li>• Compatible with Microsoft USB-CCID driver</li> <li>• Support remote wake up through inserting card/removing card</li> <li>• Support USB selective suspend</li> <li>• Support Power Saving Mode (Using one pin to select between Normal/PWR Saving Mode)</li> <li>• Support card power over current protection mechanism</li> <li>• Built in resonator.</li> <li>• Support USB LPM (Link Power Management) features.</li> <li>• Embedded clock source.</li> </ul>	



### Technical Specifications

#### POWER

<b>HP 45W Smart AC Adapter Non-Slim (740015)&amp; Non-Slim 2 Prong (742313)</b>	<b>Dimensions</b>	95.0 x 40.0 x 26.5mm	
	<b>Input</b>	90 to 265 VAC	
	<b>Output</b>	<b>Input Efficiency</b>	88% min at 115 VAC / 89% min at 230VAC
		<b>Input frequency range</b>	47 to 63 Hz
		<b>Input AC current</b>	1.4 A at 90 VAC and maximum load
		<b>Output power</b>	45W
		<b>DC output</b>	19.5V
		<b>Hold-up time</b>	5 msec at 115 VAC input
		<b>Output current limit</b>	<8A, Over voltage protection- 29V max automatic shutdown
	<b>Connector</b>	3 pin/grounded, mates with interchangeable cords	
	<b>Environmental Design</b>	<b>Operating temperature</b>	32° to 95° F (0° to 35° C)
		<b>Non-operating (storage) temperature</b>	-4° to 121° F (-20° to 85° C)
		<b>Altitude</b>	0 to 16,405 ft (0 to 5,000 m)
		<b>Humidity</b>	0% to 95%
<b>Storage Humidity</b>		0% to 95%	
<b>EMI and Safety Certifications</b>	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; Reliability - failure rate of less than 0.1% annually within the first three years of operation.		
<b>HP 65W Smart AC Adapter</b>	<b>Dimensions</b>	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)	
	<b>Weight</b>	0.62 lb (280 g)	
	<b>Input</b>	100 to 240 VAC	
		<b>Input Efficiency</b>	<b>87% min at 115 VAC</b>
	<b>Output</b>	<b>Input frequency range</b>	47 to 63 Hz
		<b>Input AC current</b>	1.7 A at 90 VAC, 0.85 A at 180 VAC
		<b>Output power</b>	65W
		<b>DC output</b>	18.5V
		<b>Hold-up time</b>	5 msec at 115 VAC input
		<b>Output current limit</b>	<11A, Over voltage protection- 29V max automatic shutdown
		<b>Connector</b>	3 pin/grounded, mates with interchangeable cords
	<b>Environmental Design</b>	<b>Operating temperature</b>	32° to 104° F (0° to 40° C)
		<b>Non-operating (storage) temperature</b>	-4° to 149° F (-20° to 65° C)
		<b>Altitude</b>	0 to 16,405 ft (0 to 5,000 m)





### Technical Specifications

<b>EMI and Safety Certifications</b>	Humidity	20% to 80%
	Storage Humidity	10% to 90%
	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.	

<b>HP 65W EM Smart AC Adapter</b>	<b>Dimensions</b>	4.98 x 1.97 x 1.18 in (12.65 x 5.0 x 3.0 cm)	
	<b>Weight</b>	0.62 lb (300 g) max	
	<b>Input</b>	90 to 265 VAC	
		<b>Input Efficiency</b>	87% min at 115 VAC
	<b>Output</b>	<b>Input frequency range</b>	47 to 63 Hz
		<b>Input AC current</b>	1.7 A at 90 VAC
		<b>Output power</b>	65W
		<b>DC output</b>	19.5V
		<b>Hold-up time</b>	5 msec at 115 VAC input
		<b>Output current limit</b>	<11A, Over voltage protection- 29V max automatic shutdown
<b>Connector</b>	3 pin/grounded, mates with 4.5mm barrel type Smart ID DC connector		
<b>Environmental Design</b>	<b>Operating temperature</b>	32° to 95° F (0° to 35° C)	
	<b>Non-operating (storage) temperature</b>	-4° to 185° F (-20° to 85° C)	
	<b>Altitude</b>	0 to 16,405 ft (0 to 5,000 m)	

<b>EMI and Safety Certifications</b>	Humidity	20% to 95%
	Storage Humidity	10% to 95%
	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.	

### Primary Battery

<b>3-cell HP Long Life (24Whr) Lithium-Ion Polymer</b>	<b>Dimensions (H x W x L)</b>	7.8 x 4.01 x 0.3 in(19.89x10.28x0.84 cm)	
	<b>Weight</b>	180 g	
	<b>Cells/Type</b>	3-cell Lithium-Ion Polymer	
	<b>Energy</b>	Voltage	11.1
		Amp-hour capacity	2.2 Ah



### Technical Specifications

	Watt-hour capacity	24Wh
<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)
	Operating (Discharging)	14° to 140° F (-10° to 50° C)
	Non-operating	-4° to 140° F (-20° to 50° C)
<b>Battery Re-Charge Time</b>	<b>System in OFF or Standby Mode</b>	3 hours
<b>Fuel Gauge LED</b>	No	
<b>Warranty</b>	1 year or 3 years*	
	*Battery warranty depends on the platform warranty.	
<b>Optional Travel Battery Available</b>	No	

#### 3-cell HP Long Life (50 WHr) Lithium-Ion Polymer

<b>Dimensions (H x W x L)</b>	7.8 x 4.01 x 0.3 in (19.89x10.28x0.84 cm)	
<b>Weight</b>	280 g	
<b>Cells/Type</b>	3-cell Lithium-Ion Polymer	
<b>Energy</b>	Voltage	11.1
	Amp-hour capacity	4.504Ah
	Watt-hour capacity	50Wh
<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)
	Operating (Discharging)	14° to 140° F (-10° to 60° C)
	Non-operating	-4° to 140° F (-20° to 60° C)
<b>Battery Re-Charge Time</b>	<b>System in OFF or Standby Mode</b>	3 hours
<b>Fuel Gauge LED</b>	No	
<b>Warranty</b>	1 year or 3 years*	
	*Battery warranty depends on the platform warranty.	
<b>Optional Travel Battery Available</b>	No	

### ENVIRONMENTAL

#### Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT Gold registered in the United States. See <http://www.epeat.net> for registration status in your country.

#### System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".



### Technical Specifications

<b>Energy Consumption (in accordance with US ENERGY STAR® test method)</b>		<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
Normal Operation (Short idle)		11.76 W	11.45 W	11.26 W
Normal Operation (Long idle)		5.06 W	4.97 W	4.92 W
Sleep		0.73 W	0.78 W	0.73 W
Off		0.35 W	0.4 W	0.35 W

**Note:**

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

<b>Heat Dissipation*</b>		<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 60Hz</b>
Normal Operation (Short idle)		40 BTU/hr	39 BTU/hr	39 BTU/hr
Normal Operation (Long idle)		17 BTU/hr	17 BTU/hr	17 BTU/hr
Sleep		2 BTU/hr	3 BTU/hr	2 BTU/hr
Off		1 BTU/hr	1 BTU/hr	1 BTU/hr

\*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.



### Technical Specifications

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (L <sub>WA</sub> d, bels)	Sound Pressure (L <sub>pAm</sub> , decibels)
Typically Configured – Idle	2.9	22
Fixed Disk – Random writes	3.0	22

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:  
Mercury greater than 1ppm by weight  
Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

Battery size: 6-cell high capacity Lithium-Ion battery (optional 8 cell available)

Battery type:

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the gold level, see [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 8.4 % post-consumer recycled plastic (by wt.)
- This product is 98.1 % recycle-able when properly disposed of at end of life.

#### Packaging Materials

**External:** PAPER/Corrugated 475 g

**Internal:** PLASTIC/EPE (Expanded Polyethylene) 47 g

PLASTIC/Polyethylene low density 26 g

The plastic packaging material contains at least 50 % recycled content.

The corrugated paper packaging materials contains at least 70 % recycled content.

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons



### Technical Specifications

- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

### Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



### Technical Specifications

#### **Hewlett-Packard Corporate Environmental Information**

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

[http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC\\_GBU\\_Product\\_Design\\_ISO\\_14K\\_Certificate.pdf](http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf)

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

#### **Country of Origin**

China



### Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
<b>Cases</b>	HP Slim Ultrabook Messenger (up to 15.6" x .88"/22/5mm)	F3W14AA
	HP Slim Ultrabook Top Load (up to 15.6" x .88"/22/5mm)	F3W15AA
<b>Docking</b>	HP 3001pr USB 3 Port Replicator	F3S42AA
	HP 3005pr USB 3.0 Port Replicator	H1L08AA#xxx
	HP UltraSlim Docking Station	D9Y32AA#xxx
	HP Universal Port Replicator	E6D70AA#xxx
	HP Display and Notebook Stand	AW662AA
<b>Input/Output – Mice</b>	HP Comfort Grip Wireless Mouse	H2L63AA
	HP X4000b Bluetooth Mouse	H3T50AA#xxx
	HP 3-Button USB Laser Mouse	H4B81AA
	HP Ultra Mobile Wireless Mouse	H6F25AA#xxx
	HP Slim Bluetooth Mouse	F3J92AA#xxx
	HP Slim Wireless Keyboard and Mouse	T6L04AA
<b>Input/Output – Keyboards</b>	HP Stylish USB Keyboard and Mouse	H4B80AA#xxx
	HP Stylish Wireless Keyboard and Mouse	H4B79AA#xxx
	HP USB Essential Keyboard and Mouse	H6L29AA
<b>Input/Output – Adapters</b>	HP Wireless Display Adapter	J1V25AA#xxx
	USB Graphics Adapter Dual output	C5U89AA
	DisplayPort to VGA	F7W97AA
	DisplayPort to DVI Adapter	F7W96AA
	DisplayPort to HDMI Cable	F3W43AA
	HP 65W Slim AC Adapter	H6Y82AA#xxx
<b>Power</b>	HP 90W Slim AC Adapter	H6Y83AA#xxx
	HP 90W Slim Combo AC Adapter w/USB	H6Y84AA#xxx
	HP 45W Smart AC Adapter	H6Y88AA#xxx
	HP 65W Smart AC Adapter	H6Y89AA#xxx
	HP 90W Smart AC Adapter	H6Y90AA#xxx
	90W Smart AC/Auto/Air Combo Adapter	AJ652AA#xxx
	90W Smart Auto/Truck Adapter	ED493AA
	HP CM03XL Notebook Battery	E7U24AA
	HP Docking Station Cable Lock	AU656AA#XXX
	HP UltraSlim Keyed Cable Lock	H4D73AA
<b>Batteries</b>	HP USB External DVDRW Drive	F2B56AA
	HP 15.6" Notebook PC Privacy Filter	J7H71AA
<b>Security</b>	HP EliteDisplay S231d 23-in IPS LED BLU Notebook Docking Monitor	F3J72AA



### Summary of Changes

<b>Date of change:</b>	<b>Version History:</b>		<b>Description of change:</b>
January 20, 2015	Version 1 to 2	Added	The words 'up to' to all battery life specs
January 26, 2015	V2 to V3	Added	Environmental information and stand by time
March 18, 2015	V3 to V4	Changed	Memory unit speed spec on page 8
April 10, 2015	V4 to V5	Removed	Surface Treatment Anti Glare page 16 and 17
June 29, 2015	V5 to v6	Added	Windows 10 in overview on page 4, OS list on page 5, footnotes on page 5 and 8
		Updated	TPM Embedded Security Chip to 1.2
		Removed	2013 from name of HP UltraSlim Docking Station
July 29, 2015	V6 to v7	Updated	Battery info with HP CM03XL Notebook Battery E7U24AA page 46
May 27, 2016	V7 to v8	Removed Added	HP 2.4 GHz Keyboard and Mouse G1K29AA HP Slim Wireless Keyboard and Mouse T6L04AA

Copyright © 2016 HP Development Company, L.P.

All rights reserved. Intel, Core, and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Adobe is a trademark of Adobe Systems Incorporated. ENERGY STAR is a registered mark owned by the U.S. government.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

