


QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Overview

HP EliteBook 820 G3 Notebook PC

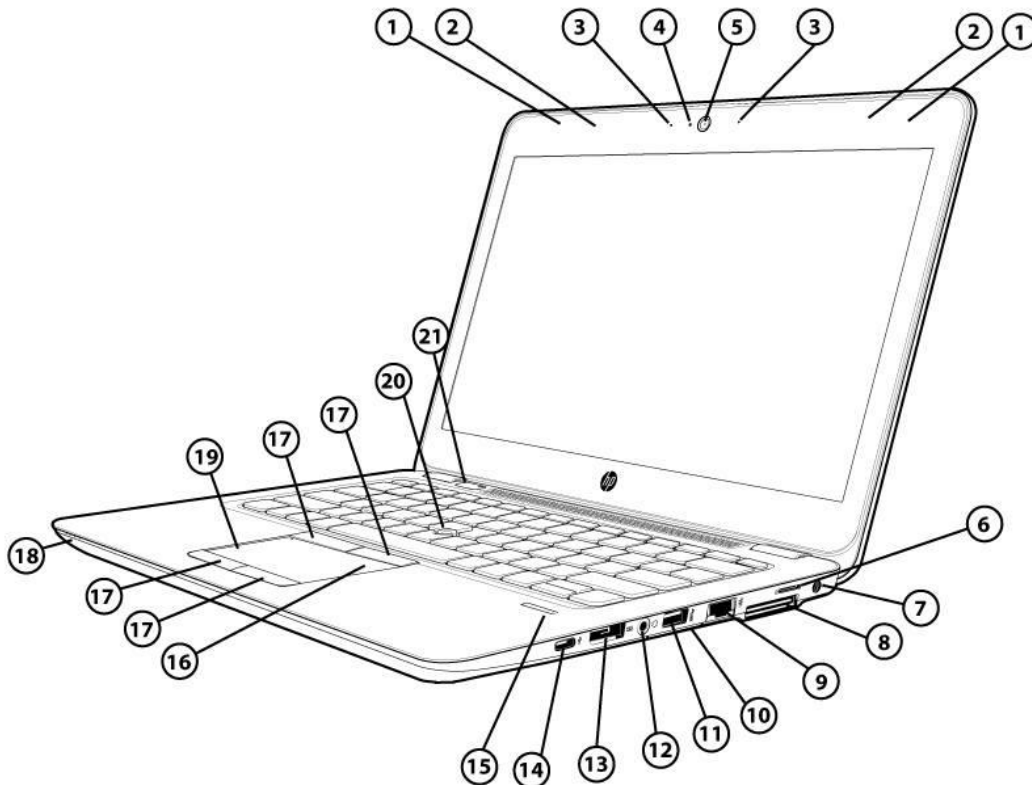

Front / Right


- | | |
|---------------------------------------|--|
| 1. WLAN antennas (2) | 13. DisplayPort 1.2 |
| 2. WWAN antennas (2) (select models) | 14. USB-C™ port |
| 3. Internal microphones (2) | 15. Fingerprint reader (select models) |
| 4. Webcam LED (select models) | 16. Touchpad |
| 5. Webcam (select models) | 17. Touchpad buttons (4) |
| 6. SIM card slot | 18. Indicator LEDs: Wireless Light, Power Light, AC Adapter/Battery Light, Storage Usage Light |
| 7. Power connector | 19. NFC (select models) |
| 8. Docking connector | 20. Pointstick |
| 9. Ethernet port | 21. Power button |
| 10. SD Card Slot | |
| 11. USB 3.0 Port | |
| 12. Microphone/ headphones combo jack | |



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Overview

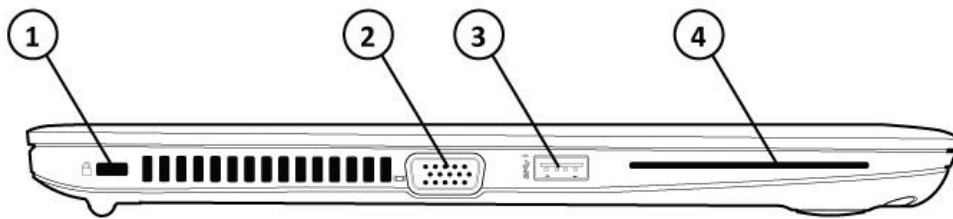

Left

1. Security lock slot
2. VGA port
3. USB 3.0 Charging port
4. Smart Card Reader




QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Overview

HP EliteBook 840 G3 Notebook PC

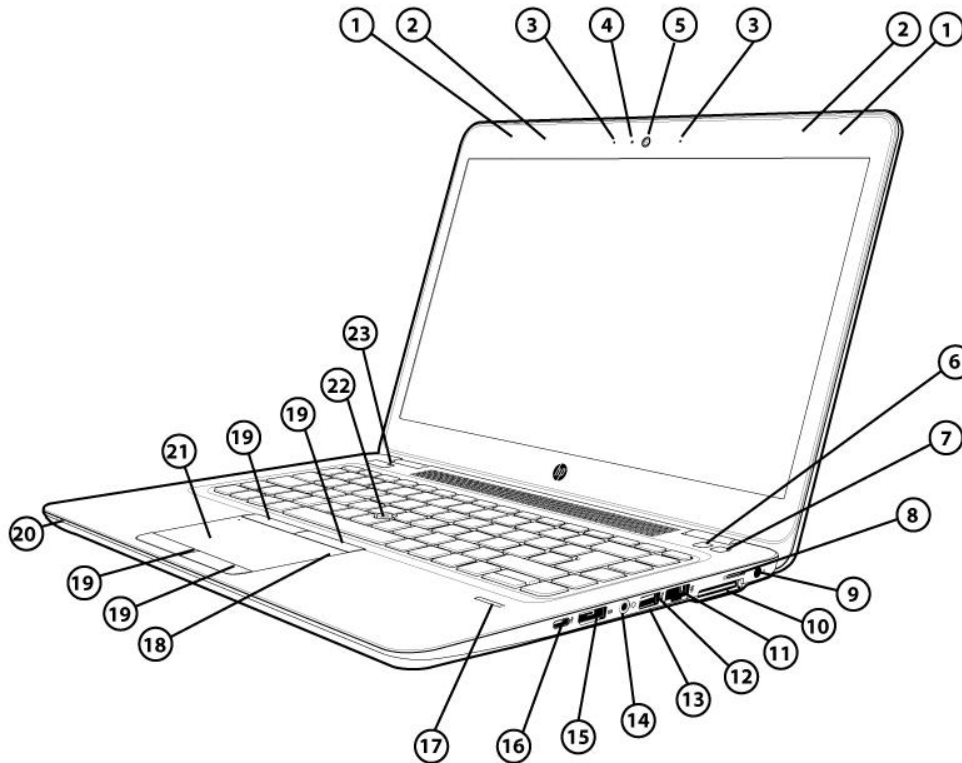

Front / Right


- | | |
|--------------------------------------|--|
| 1. WLAN antennas (2) | 13. SD card slot |
| 2. WWAN antennas (2) (select models) | 14. Microphone/ headphones combo jack |
| 3. Internal microphones (2) | 15. DisplayPort 1.2 |
| 4. Webcam LED (select models) | 16. USB-C™ port |
| 5. Webcam (select models) | 17. Fingerprint reader (select models) |
| 6. Wireless on/off button | 18. Touchpad |
| 7. Speaker mute button | 19. Touchpad buttons (4) |
| 8. SIM card slot | 20. Indicator LEDs: Wireless Light, Power Light, AC Adapter/Battery Light, Storage Usage Light |
| 9. Power connector | 21. NFC (select models) |
| 10. Docking connector | 22. Pointstick |
| 11. Ethernet port | 23. Power button |
| 12. USB 3.0 port | |



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Overview

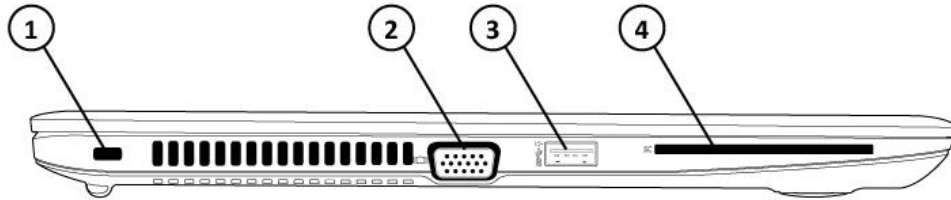

Left

1. Security lock slot
2. VGA port
3. USB 3.0 Charging port
4. Smart Card Reader




QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Overview

HP EliteBook 850 G3 Notebook PC

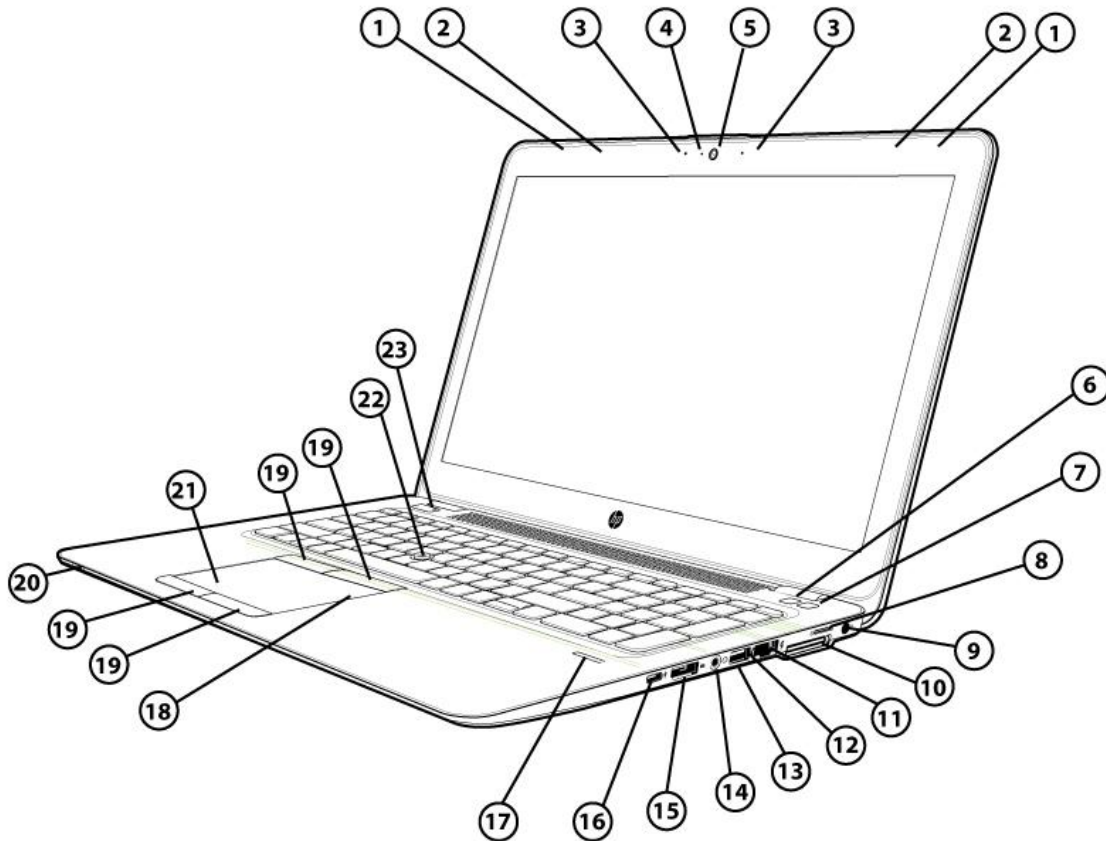

Front / Right


- | | |
|--------------------------------------|--|
| 1. WLAN antennas (2) | 13. SD card slot |
| 2. WWAN antennas (2) (select models) | 14. Microphone/ headphones combo jack |
| 3. Internal microphones (2) | 15. DisplayPort 1.2 |
| 4. Webcam LED (select models) | 16. USB-C™ port |
| 5. Webcam (select models) | 17. Fingerprint reader (select models) |
| 6. Wireless on/off button | 18. Touchpad |
| 7. Speaker mute button | 19. Touchpad buttons (4) |
| 8. SIM card slot | 20. Indicator LEDs: Wireless Light, Power Light, AC Adapter/Battery Light, Storage Usage Light |
| 9. Power connector | 21. NFC (select models) |
| 10. Docking connector | 22. Pointstick |
| 11. Ethernet port | 23. Power button |
| 12. USB 3.0 port | |



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Overview

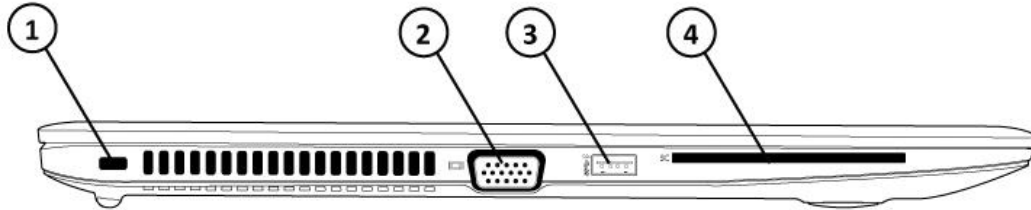

Left

- | | |
|-----------------------|--------------------------|
| 1. Security lock slot | 3. USB 3.0 Charging port |
| 2. VGA port | 4. Smart Card Reader |



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Overview

AT A GLANCE

- Stylish, lightweight magnesium and aluminum chassis starts at 18.9 mm thin
- No dongles are needed with built-in VGA, drop-jaw RJ-45 Ethernet port, USB 3.0, USB Type-C™, and full-size DisplayPort 1.2 for high resolution support
- Customer serviceable and upgradeable with component accessible design
- Choice of 6th generation Intel® Core™ i7, i5 and i3 processors
- Integrated Intel® HD Graphics 520 or AMD Radeon™ R7 M365X discrete graphics (HP EliteBook 850 option only)
- Optimize your audio experience for remote collaboration with optional HD webcam, dual-microphone array, premium speakers, HP Noise Reduction Software, HP Clear Sound Amp, Audio by Bang & Olufsen
- Improved keyboard experience featuring HP Premium Keyboard with dual-point (10-key numeric keypad available on 850)
- Optional back-lit keyboard keeps you productive in all settings with HP DuraKeys to protect keys from fading
- Ensured durability through MIL-SPEC 810G testing, plus an additional 115,000 hours of reliability testing through HP's Total Test Process¹
- Enhanced security features including TPM1.2/2.0², SmartCard Reader, HP Sure Start self-healing BIOS, HP Client Security, Self-Encrypting storage drives, and optional Fingerprint reader
- HP Touchpoint Manager manageability supported
- LED-backlit displays:
 - HP EliteBook 820: 12.5" diagonal HD, FHD Non-Touch or FHD Touch
 - HP EliteBook 840: 14.0" diagonal HD, FHD, QHD Non-Touch or FHD Touch
 - HP EliteBook 850: 15.6" diagonal HD, FHD, UHD Non-Touch or FHD Touch
- Flexible wireless connectivity options including mobile broadband
- Easily dock with the optional HP UltraSlim Docking Station
- Choice of hard drives up to 1 TB and solid state drives up to 512 GB
- DDR4 memory up to 16 GB for HP EliteBook 820 and up to 32 GB for HP EliteBook 840 and 850
- Preinstall Windows 10, Windows 8.1, Windows 7, FreeDOS 2.0 or NeoKylin 64 versions

1. Testing was not intended to demonstrate fitness for Department of Defense contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

2. This product ships with TPM 1.2 with option to upgrade to TPM 2.0. Upgrade utility is expected to be available by the second half of 2016 via HP Customer Support.

NOTE: See important legal disclosures for all listed specs in their respective features sections.



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Features

PRODUCT NAMES

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

OPERATING SYSTEM

Preinstalled

Windows 10 Pro 64¹
Windows 10 Home 64¹
Windows 8.1 Pro 64³
Windows 8.1 64³
Windows 7 Professional 64 (available through downgrade rights from Windows 10 Pro)²
Windows 7 Professional 32 (available through downgrade rights from Windows 10 Pro)²
Windows 7 Professional 64³
Windows 7 Professional 32³
FreeDOS 2.0
NeoKylin Linux 64

Web Supported

Windows 10 Pro 64¹
Windows 10 Home 64¹
Windows 10 Enterprise 64¹
Windows 8.1 Pro 64¹
Windows 8.1 64¹
Windows 8.1 Enterprise 64¹
Windows 7 Professional 64¹
Windows 7 Professional 32¹
Windows 7 Enterprise 64¹
Windows 7 Enterprise 32¹

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>.
2. This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 10 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.
3. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. See <http://www.microsoft.com>.

PROCESSOR

Intel® Core™ i7-6600U (2.6 GHz, up to 3.4 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)¹
Intel® Core™ i7-6500U (2.5 GHz, up to 3.1 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)^{1,2}
Intel® Core™ i5-6300U (2.4 GHz, up to 3 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)¹
Intel® Core™ i5-6200U (2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{1,2}
Intel® Core™ i3-6100U (2.3 GHz, 3 MB cache, 2 cores)^{1,2}



Features

1. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering is not a Measurement of higher performance.
2. Not available with Intel iAMT (*Not available with vPro)

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

CHIPSET

Chipset integrated with processor

INTEL® CORE I5 WITH vPRO/CORE I7 WITH vPRO TECHNOLOGY CAPABLE

Intel® Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with select processors, on select Intel® Wireless WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel® Active Management Technology (iAMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off¹ or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.

*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

NOTE: Some functionality of this technology, such as Intel® Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependent on 3rd party software providers. Microsoft Windows required.

GRAPHICS

Integrated

Intel® HD Graphics 520

Discrete

AMD Radeon™ R7 M365X
1GB GDDR5 dedicated
(HP EliteBook 850 only)

DISPLAY

HP EliteBook 820

Internal

Non-Touch

- 12.5" diagonal LED backlight HD¹ Slim eDP SVA Anti-glare (1366 x 768)
- 12.5" diagonal LED backlight HD¹ Slim eDP SVA Anti-glare (1366 x 768) with camera
- 12.5" diagonal LED backlight FHD UltraSlim eDP UWVA Anti-glare (1920 x 1080)
- 12.5" diagonal LED backlight FHD UltraSlim eDP UWVA Anti-glare (1920 x 1080) with camera



Features

Touch

12.5" diagonal LED backlight FHD UltraSlim eDP UWVA (1920 x 1080) Touch with camera²

HP EliteBook 840

HP Sure View

Non-Touch Integrated Privacy Screen

14.0" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080)

14.0" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080) with camera

Internal

Non-Touch

14.0" diagonal LED backlight HD¹ Slim eDP SVA Anti-glare (1366 x 768)

14.0" diagonal LED backlight HD¹ Slim eDP SVA Anti-glare (1366 x 768) with camera

14.0" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080)

14.0" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080) with camera

14.0" diagonal LED backlight FHD Slim eDP UWVA Anti-glare (1920 x 1080)

14.0" diagonal LED backlight QHD UltraSlim eDP + PSR UWVA Anti-glare (2560 x 1440)

14.0" diagonal LED backlight QHD UltraSlim eDP + PSR UWVA Anti-glare (2560 x 1440) camera

Touch

14.0" diagonal LED backlight FHD Slim eDP SVA (1920 x 1080) Touch with camera²

HP EliteBook 850

Internal

Non-Touch

15.6" diagonal LED backlight HD¹ Slim eDP SVA Anti-glare (1366 x 768)

15.6" diagonal LED backlight HD¹ Slim eDP SVA Anti-glare (1366 x 768) with camera

15.6" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080)

15.6" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080) with camera

15.6" diagonal LED backlight FHD Slim eDP UWVA Anti-glare (1920 x 1080)

15.6" diagonal LED backlight UHD Slim eDP UWVA Anti-glare (3840 x 2160)

15.6" diagonal LED backlight UHD Slim eDP UWVA Anti-glare (3840x 2160) with camera

Note: The HP EliteBook 850 G3 UHD panel is not compatible with WWAN.

Touch

15.6" diagonal LED backlight FHD Slim eDP SVA (1920 x 1080) Touch with camera²

VGA

Port supports resolutions up to 1920 x 1200 external resolution @60 Hz

DisplayPort 1.2

Supports resolutions up to 4096 x 2160 @ 60 Hz

Resolutions are dependent upon monitor capability, and resolution and color depth settings.

Number of Displays supported with Docking

Supports 3 independent displays if used with optional HP Ultralim Docking Station.³

1. HD content required to view HD images.
2. Touch panel has chemically-strengthened Corning® Gorilla® Glass 3 top cover.



Features

3. Sold separately or as an optional feature.
NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage

SATA, 2.5" Hard Drives

500 GB 7200rpm Self Encrypting Drive (FIPS-140-2) (Opal 2)
500 GB 7200rpm Hard Drive
500 GB 7200rpm Self-Encrypting Drive (Opal 2)
1 TB 5400rpm Hard Drive
500 GB Hybrid, 8 GB cache

Mini Card Solid State Drive

M.2 (NGFF) 2280 Solid State Drive
128 GB SATA-3 TLC Solid State Drive
180 GB SATA-3 MLC Solid State Drive
180 GB SATA-3 Self-Encrypting (Opal 2) MLC Solid State Drive
240 GB SATA-3 MLC Solid State Drive
256 GB SATA-3 TLC Solid State Drive
256 GB SATA-3 Self-Encrypting (Opal 2) MLC Solid State Drive
256 GB PCIe-3x4 NVMe Solid State Drive
512 GB SATA-3 TLC Solid State Drive
512 GB SATA-3 Self-Encrypting (Opal 2) MLC Solid State Drive

NOTE: For Solid State Drives or Hard Drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and up to 30 GB (for Windows 8.1 and 10) is reserved for system recovery software.

HP 3D DriveGuard (Windows and Hard Drives only)

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive

Dual Drive Configuration

System can be configured with a hard drive and M.2 SSD drive.¹

1. Not available for the Hybrid Hard Drive and not supported on 820 G3.

MEMORY

Standard

DDR4 PC4-17000 (Transfer rates up to 2133 MT/s)
Two SODIMM slots supporting dual-channel memory
Both slots are customer accessible / upgradeable

Supports the following configurations

4096 MB Total System Memory (4096 MB x 1)
8192 MB Total System Memory (4096 MB x 2)
8192 MB Total System Memory (8192 MB x 1)
16384 MB Total System Memory (8192 MB x 2)
16384 MB Total System Memory (16384 MB x 1) (HP EliteBook 840 and 850 only)



Features

32768 MB Total System Memory (16384 MB x 2) (HP EliteBook 840 and 850 only)

Maximum

HP EliteBook 820

Up to 16 GB

HP EliteBook 840 and 850

Up to 32 GB

Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Improved system performance when memory is added in pairs (dual channel).

Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

NETWORKING/COMMUNICATIONS

Wireless

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Optional Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth® is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

Broadband Wireless (WWAN)

HP It4120 Qualcomm® Snapdragon X5 LTE Mobile Broadband Module^{1,3}

HP hs3110 HSPA+ Intel® Mobile Broadband Module^{1,2}

Note: The HP EliteBook 850 G3 UHD panel is not compatible with WWAN.

Wireless LAN (WLAN) Via M.2 Minicard

Intel® Dual Band Wireless-AC 8260 802.11 a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 combo (vPro)²

Intel® Dual Band Wireless-AC 8260 802.11 a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 combo (non-vPro)²

Intel® Wireless-AC 3165 802.11 a/b/g/n/ac (1x1) WiFi and Bluetooth® 4.2 combo (non-vPro)²

Near Field Communication (NFC)¹

HP Module with NXP NFC Controller NPC100

Support for Miracast

1. Sold separately or as an optional feature.
2. Wireless access point and Internet service is required and is not included.
Availability of public wireless access points limited.
3. WWAN module requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products, in all regions.

Communications

Intel® Ethernet Connection I219-V 10/100/1000 Ethernet (with Intel® i3-6100U, i5-6200U, and i7-6500U)



Features

Intel® Ethernet Connection I219-LM 10/100/1000 Ethernet (with Intel® i5-6300U and i7-6600U)

NOTE: The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

AUDIO/MULTIMEDIA

Audio

Audio by Bang & Olufsen
HP Clear Sound Amp
HP Noise Reduction Software
Digital Microphones (Dual Array)
2 Premium Stereo Speakers

Webcam

Optional¹ 720p HD² webcam³

Note: Optimizes image quality under low light conditions and fixed focus lens.

1. Sold separately or as an optional feature.
2. HD content required to view HD images.
3. Internet access required.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

HP Premium Keyboard

The HP spill-resistant keyboard with drain is designed using a thin layer of Mylar film under the keyboard and includes an all-metal keyboard deck for greater rigidity. The 820 has 79/80-key, 840 has 85-86-key, the 850 has 100/101-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, and function keys.

US and International key layouts are available. Backlit keyboard with HP DuraKeys available as an option.

Pointing Devices

Glass Touchpad
On/Off button
Taps enabled as default
Gestures enabled by default - 2 Finger Scrolling, 2 Finger Zoom (Pinch)

Buttons and Function Keys

HP EliteBook 820

F1 - Sleep
F2 - Blank
F3 - Keyboard Backlit toggle
F4 - Display switching
F5 - Brightness Down
F6 - Brightness Up
F7 - Speaker Mute



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Features

F8 - Volume Down
F9 - Volume Up
F10 - Mic Mute
F11 - Wireless
F12 - Num Lock

HP EliteBook 840

F1 - Sleep
F2 - Blank
F3 - Keyboard Backlit toggle
F4 - Display switching
F5 - Brightness Down
F6 - Brightness Up
F7 - Blank
F8 - Volume down
F9 - Volume up
F10 - Mic mute
F11 - Blank
F12 - Num Lock

HP EliteBook 840

**(configurations with HP Sure
View integrated privacy screen)**

F1 - Sleep
F2 - Privacy
F3 - Keyboard Backlit toggle
F4 - Display switching
F5 - Brightness Down
F6 - Brightness Up
F7 - Blank
F8 - Volume down
F9 - Volume up
F10 - Mic mute
F11 - Blank
F12 - Num Lock

HP EliteBook 850

F1 - Sleep
F2 - Blank
F3 - Backlit toggle
F4 - Display switching
F5 - Brightness Down
F6 - Brightness Up
F7 - Blank
F8 - Volume down
F9 - Volume up
F10 - Mic mute
F11 - Blank
F12 - Blank

Hidden Function Keys



Features

Fn+R - Break
Fn+S - Sys Rq
Fn+C - Scroll Lock

SOFTWARE AND SECURITY

Preinstalled Software

BIOS

HP BIOSphere¹
HP Sure Start
HP DriveLock | HP Automatic DriveLock
HP BIOS Protection²
BIOS Update via Network
Master Boot Record Security
Power On Authentication
Pre-Boot Security
Secure Erase³
Hybrid Boot
Measure Boot
HP SpareKey
Pre-boot Authentication

Multi Media

Cyberlink YouCam BE (Windows 7 only)

Communication

HP GPS and Location (Windows 7 only)⁵
HP Connection Manager with support for HP Mobile Connect Pro (Windows 7 only)⁶
HP Mobile Connect Pro (Windows 8.1 and Windows 10 only)⁶
Intel® Wireless Display (WiDi) Software for Windows⁷
Native Miracast Support⁸

HP Value Add Software

HP 3D DriveGuard (requires Windows)
HP ePrint Driver⁹
HP Hotkey Support
HP Recovery Manager
HP Recovery Disc Creator
HP Registration App (Windows 8.1 only)
HP Support Assistant



Features

HP Noise Reduction Software

3rd Party

Foxit PhantomPDF Express for HP

Microsoft Products

Buy Office

Bing Search

Skype¹⁰

Manageability

HP Driver Packs¹¹

HP SoftPaq Download Manager (SDM)

HP System Software Manager (SSM)¹¹

HP BIOS Config Utility (BCU)¹¹

HP Client Catalog¹¹

HP CIK for Microsoft SCCM¹¹

HP Image Assistant¹¹

LANDESK Management¹²

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

Client Security Software

HP Client Security

- HP Security Manager (including Credential Manager and Password Manager)
- HP Drive Lock
- HP Fingerprint Sensor
- HP Password Manager
- Absolute Persistence Module⁴
- Power On Authentication

Microsoft Security Essentials¹³

Microsoft Defender

Security

Trusted Platform Module (TPM) 1.2 (Infineon SLB9670). Common Criteria EAL4+ Certified.

Upgradable to TPM 2.0. Convertible to FIPS 140-2 Certified mode. (TPM 2.0 is not available for Win 7 32-bit.)¹⁴

HP Fingerprint Reader (On select models)

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

1. Available only on business PCs with HP BIOS.

2. May require a manual recovery step if all copies of BIOS are compromised or deleted

3. For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Features

4. Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.
5. GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.
6. HP Mobile Connect Pro is only available on preconfigured devices with WWAN. For geographic availability refer to <http://www.hp.com/go/mobileconnect>
7. Integrated Intel Wi-Di feature is available on select configurations preinstalled with Windows 7 or Windows 8.1 only and requires separately purchased projector, TV or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, TV or computer monitor via a standard HDMI cable, also sold separately.
8. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>
9. Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/eprintcenter>). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.
10. Skype is not offered in China.
11. Not preinstalled, however available for download in December 2015 at <http://www.hp.com/go/clientmanagement>
12. Subscription required.
13. Opt in and internet connection required for updates.
14. Upgrade utility is expected to be available by the second half of 2016 via HP Customer Support.

POWER

- HP 45W Smart AC Adapter (Not available for Asia, China and India)
- HP 45W 2-prong DC jack AC Adapter (Japan only)
- HP 65W Smart AC Adapter (Not available for Asia, China and India; for 840 & 850 only)
- HP 65W Smart AC Adapter EM (Asia, China and India only)

Power cord is configurable; either 3.2 feet or 6 feet (1.0 or 1.8 meter)
Total length including external AC adapter is 9.2 feet or 12 feet (2.86 or 3.66 meter)

Battery Life

Platform	Other HW Details	Battery	UMA Graphics	Discrete Graphics
HP EliteBook 820 G3	HDD	3-cell (44Whr)	Up to 9 hrs 45 mins	N/A
HP EliteBook 820 G3	SSD	3-cell (44Whr)	Up to 12 hrs 30 mins	N/A
		Standby Time*	193 hrs	N/A



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Features

Platform	Other HW Details	Battery	UMA Graphics	Discrete Graphics
HP EliteBook 840 G3	HDD	3-cell (46Whr)	Up to 10 hrs 30 mins	N/A
HP EliteBook 840 G3	SSD	3-cell (46Whr)	Up to 13 hrs 30 mins	N/A
		Standby Time*	223 hrs	N/A

Platform	Other HW Details	Battery	UMA Graphics	Discrete Graphics
HP EliteBook 850 G3	HDD	3-cell (46Whr)	Up to 9 hrs 30 mins	Up to 9 hrs 30 mins
HP EliteBook 850 G3	SSD	3-cell (46Whr)	Up to 12 hrs 30 mins	Up to 12 hrs
		Standby Time*	223 hrs	221 hrs

1. Disclaimer: Windows 10/MM14 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.

Power Conservation

Hibernation
 Standby
 ACPI compliance

Battery recharge times

	HP EliteBook 820	HP EliteBook 840 and HP EliteBook 850
Time to 90% Charge (minute) (3-16)	112 ¹	119 ³
Time to 100% Charge (minute) (3-16)	155 ²	163 ⁴

1. Recharges your battery up to 90% within 112 minutes when the system is off. Applies to 3-cell 44 Whr battery only. When the PC is powered on, charge time may increase and will vary based on the workload of the notebook PC.
2. Recharges your battery up to 100% within 155 minutes when the system is off. Applies to 3-cell 44 Whr battery only. When the PC is powered on, charge time may increase and will vary based on the workload of the notebook PC.
3. Recharges your battery up to 90% within 119 minutes when the system is off. Applies to 3-cell 46 Whr battery only. When the PC is powered on, charge time may increase and will vary based on the workload of the notebook PC.
4. Recharges your battery up to 100% within 163 minutes when the system is off. Applies to 3-cell 46 Whr battery only. When the PC is powered on, charge time may increase and will vary based on the workload of the notebook PC.

WEIGHTS & DIMENSIONS

HP EliteBook 820

Weight¹

Starting at 2.78 lbs (1.26 kg)

(3-cell battery (44Whr), UMA, no FPR, 1 SODIMM, WLAN, M.2 SSD, no camera, no WWAN, Non-Touch panel)



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Features

Starting at 3.05 lbs (1.38 kg)

(3-cell battery (44Whr), UMA, no FPR, 1 SODIMM, WLAN, M.2 SSD, no camera, no WWAN, Touch)

Dimensions² (w x d x h)

Non-Touch

12.2 x 8.6 x 0.74 in

31 x 21.89 x 1.89 cm

Touch

12.2 x 8.6 x 0.80 in

31 x 21.89 x 2.02 cm

HP EliteBook 840

Weight¹

Starting at 3.27 lbs (1.48 kg)

(3-cell battery (46Whr), UMA, no FPR, 1 SODIMM, WLAN, M.2 SSD, no camera, no WWAN, Non-Touch panel)

Starting at 3.76 lbs (1.70 kg)

(3-cell battery (46Whr), UMA, no FPR, 1 SODIMM, WLAN, M.2 SSD, no camera, no WWAN, Touch)

Dimensions² (w x d x h)

Non-Touch

13.3 x 9.3 x 0.74 in

33.8 x 23.7 x 1.89 cm

Touch

13.3 x 9.3 x 0.80 in

33.8 x 23.7 x 2.02 cm

HP EliteBook 850

Weight¹

Starting at 4.06 lbs (1.84 kg)

(3-cell battery (46Whr), UMA, no FPR, 1 SODIMM, WLAN, M.2 SSD, no camera, no WWAN, Non-Touch panel)

Starting at 4.54 lbs (2.06 kg)

(3-cell battery (46Whr), UMA, no FPR, 1 SODIMM, WLAN, M.2 SSD, no camera, no WWAN, Touch)

Dimensions² (w x d x h)

Non-Touch

15.09 x 10.10 x 0.76 in

38.33 x 25.77 x 1.94 cm

Touch

15.09 x 10.10 x 0.82 in

38.33 x 25.77 x 2.08 cm

1. Weight varies by configuration and components.



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Features

2. Height varies depending upon where on the notebook the measurement is made.

PORTS/SLOTS

Ports

- (1) USB 3.0 Charging Port
- (1) USB 3.0 Port
- (1) USB Basic Type-C
- DisplayPort 1.2
- VGA
- RJ-45 / Ethernet
- Docking connector
- Headphone/Microphone Combo
- AC Port

NOTE: Cables are not included.

Slots

- External SIM slot - Micro SIM (3FF): 15 x 12mm
- SD Media Card Reader Slot Supports SD, SDHC, SDXC

SERVICE AND SUPPORT

Limited 3-year, 1-year or 90-day limited warranty options available, depending on country. Batteries have a default one year limited warranty except for Long Life batteries which will have same 1-year or 3-year limited warranty as the platform. Optional¹ HP Care Pack Services² are extended service contracts which go beyond your standard limited warranties.

1. Sold separately or as an optional feature.
2. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

SYSTEM UNIT

TBD

DISPLAYS

**12.5" diagonal LED
backlight HD Slim eDP
SVA Anti-glare
(1366 x 768)**

Outline Dimensions (W x H x D)	291.0 x 181.9mm(max) X 3.0(max) mm
Active Area	276.615mm x 155.52mm
Weight	250g max.
Diagonal Size	12.5"
Surface Treatment	AG
Contrast Ratio	300:1 (typ) - AG
Refresh Rate	60Hz
Response time	16ms typ.
Pixel Per Inch (PPI)	125
Brightness	220nits
Pixel Resolution	Format 1366 x 768 (HD) Configuration RGB Stripe
Interface	eDP 1.2 (1 lane)
LCD Mode	TN
Viewing Angle	SVA 40/40/15/30

**12.5" diagonal LED
backlight FHD UltraSlim
eDP UWVA Anti-glare
(1920 x 1080)**

Outline Dimensions (W x H x D)	282.7 x 179.82 (max) x 2.3 (max) mm
Active Area	276.48 typ. (W) x 155.52 typ. (H)
Weight	170 max
Diagonal Size	12.5"
Surface Treatment	AG
Contrast Ratio	600:1 (typ) - AG
Refresh Rate	60Hz
Response time	25ms typ.
Pixel Per Inch (PPI)	176
Brightness	300nits
Pixel Resolution	Format 1920 x 1080 (FHD) Configuration RGB Stripe
Interface	eDP 1.3 (2 lane)
LCD Mode	IPS/FFS/VA
Viewing Angle	UWVA 85/85/85/85



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

12.5" diagonal LED backlight FHD UltraSlim eDP UWVA (1920 x 1080) Touch with camera	Outline Dimensions (W x H x D)	282.7 x 179.82 (max) x 2.3 (max) mm	
	Active Area	276.48 typ. (W) x 155.52 typ. (H)	
	Weight	310 max	
	Diagonal Size	12.5"	
	Touch Enabled	Yes	
	TSP Type	Capacitive	
	Surface Treatment	AG	
	Contrast Ratio	600:1 (typ) - AG	
	Refresh Rate	60Hz	
	Response time	25ms typ.	
	Pixel Per Inch (PPI)	176	
	Brightness	300nits	
	Pixel Resolution	Format	1920 x 1080 (FHD)
		Configuration	RGB Stripe
	Interface	eDP 1.3 (2 lane)	
	LCD Mode	IPS/FFS/VA	
Viewing Angle	UWVA 85/85/85/85		

14.0" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080) Non-Touch Integrated Privacy Screen	Outline Dimensions (W x H x D)	320.9 x 205.6 (max) x 3.6(max) mm	
	Active Area	309.14x173.89	
	Weight	<305 max	
	Diagonal Size	14"	
	Surface Treatment	AG	
	Contrast Ratio	200:1 (typ) - AG	
	Refresh Rate	60Hz	
	Response time	16ms typ.	
	Pixel Per Inch (PPI)	157	
	Brightness	Privacy 85nits typ. (system) Sharing 275nits typ. (system)	
	Pixel Resolution	Format	1920 x 1080 (FHD)
		Configuration	RGB Stripe
	Interface	eDP 1.2 (2 lane)	
	LCD Mode	TN	
	Viewing Angle	Sharing 45/45/15/30 (CR>10) Privacy 40/40/15/30 (CR>10)	



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

14.0" diagonal LED backlight HD Slim eDP SVA Anti-glare (1366 x 768)	Outline Dimensions (W x H x D)	320.9 x 205.6 (max) x 3.0mm max	
	Active Area	309.4 x 173.95	
	Weight	<290 max.	
	Diagonal Size	14.0"	
	Surface Treatment	AG	
	Contrast Ratio	300:1 (typ) - AG	
	Refresh Rate	60Hz	
	Response time	16ms typ.	
	Pixel Per Inch (PPI)	112	
	Brightness	220nits	
	Pixel Resolution	Format	1366 x 768 (HD)
		Configuration	RGB Stripe
	Interface	eDP 1.2 (1 lane)	
	LCD Mode	TN	
Viewing Angle	SVA 40/40/15/30		

14.0" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080)	Outline Dimensions (W x H x D)	320.9 x 205.6 (max) x 3.0(max) mm	
	Active Area	308.851x173.73	
	Weight	<270 max	
	Diagonal Size	14"	
	Surface Treatment	AG	
	Contrast Ratio	300:1 (typ) - AG	
	Refresh Rate	60Hz	
	Response time	16ms typ.	
	Pixel Per Inch (PPI)	157	
	Brightness	300nits	
	Pixel Resolution	Format	1920 x 1080 (FHD)
		Configuration	RGB Stripe
	Interface	eDP 1.2 (2 lane)	
	LCD Mode	TN	
Viewing Angle	SVA 40/40/15/30		



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

14.0" diagonal LED backlight QHD UltraSlim eDP UWVA Anti-glare (2560 x 1440)	Outline Dimensions (W x H x D)	320.4± 0.5 x 198.6±0.5 mm typ. (w/PCB)	
	Active Area	309.504 mmx 174.096mm	
	Weight	270g max	
	Diagonal Size	14.0"	
	Surface Treatment	Anti-Glare	
	Contrast Ratio	600:1 (typ.)	
	Refresh Rate	60Hz	
	Response time	25ms typ.	
	Pixel Per Inch (PPI)	210	
	Brightness	340 nits typ	
	Pixel Resolution	Format	2560x1440
		Configuration	RGB
	Interface	eDP 1.3 + PSR	
	LCD Mode	IPS	
Viewing Angle	UWVA 85/85/85/85		

14.0" diagonal LED backlight FHD Slim eDP SVA (1920 x 1080) Touch with camera	Outline Dimensions (W x H x D)	320.9 x 205.6 (max) x 3.0(max) mm	
	Active Area	308.851x173.73	
	Weight	430g max	
	Diagonal Size	14"	
	Surface Treatment	AG	
	Touch Enabled	Yes	
	TSP Type	Capacitive	
	Contrast Ratio	300:1 (typ) - AG	
	Refresh Rate	TBD	
	Response time	16ms typ.	
	Pixel Per Inch (PPI)	157	
	Brightness	300nits	
	Pixel Resolution	Format	1920 x 1080 (FHD)
		Configuration	RGB Stripe
Interface	eDP 1.2 (2 lane)		



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

	LCD Mode	TN
	Viewing Angle	SVA 40/40/15/30
14.0" diagonal LED backlight FHD Slim eDP UWVA Anti-glare non- touch (1920 x 1080)	Outline Dimensions (W x H x D)	320.9 x 205.6 x 3.0 (mm) max
	Active Area	309.14 x 173.89 (mm)
	Weight	285 g max
	Diagonal Size	14.0"
	Surface Treatment	Anti-Glare
	Contrast Ratio	600:1 (typ)
	Refresh Rate	60Hz
	Response time	35ms (typ)
	Pixel Per Inch (PPI)	157
	Brightness	300 nits
	Pixel Resolution	Format 1920 x1080 (FHD) Configuration RGB
	Interface	eDP 1.3
	LCD Mode	IPS
	Viewing Angle	UWVA 85/85/85/85
	15.6" diagonal LED backlight HD Slim eDP SVA Anti-glare (1366 x 768)	Outline Dimensions (W x H x D)
Active Area		344.2 x 193.5
Weight		370g max
Diagonal Size		15.6"
Surface Treatment		AG
Contrast Ratio		300:1 (typ) - AG
Refresh Rate		60Hz
Response time		16ms typ.
Pixel Per Inch (PPI)		101
Brightness		220 nit typ
Pixel Resolution		Format 1366 x 768 (HD) Configuration RGB Stripe
Interface		eDP 1.2 (1 lane)
LCD Mode		TN
Viewing Angle		SVA 40/40/15/30



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

15.6" diagonal LED backlight FHD Slim eDP SVA Anti-glare (1920 x 1080)	Outline Dimensions (W x H x D)	360.0 x 224.3 x 3.2 mm max	
	Active Area	344.16 x 193.59 mm	
	Weight	360 max.	
	Diagonal Size	15.6"	
	Surface Treatment	AG	
	Contrast Ratio	400:1 (typ)	
	Refresh Rate	60Hz	
	Response time	16ms typ.	
	Pixel Per Inch (PPI)	142	
	Brightness	300nits	
	Pixel Resolution	Format	1920 x 1080 (FHD)
		Configuration	RGB Stripe
	Interface	eDP 1.2 (2 lane)	
	LCD Mode	TN	
Viewing Angle	SVA 45/45/25/35		

15.6" diagonal LED backlight UHD Slim eDP UWVA Anti-glare (3840 x 2160)	Dimensions (W x H)	13.62 x 7.59 in (3.6 x 19.4 cm)	
	Diagonal Size	15.6 in (39.6 cm)	
	Weight	345 g (max)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	1000:1 (typ)	
	Refresh Rate	60 Hz	
	Brightness	340 nit typical	
	Pixel Resolution	Pitch	0.090 x 0.090 mm
		Format	3840x2160
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	282	
	Viewing Angle	80° Horizontal, ±80° Vertical (minimum) 80/80/80/80 (Left/Right/Down/Up) (min)	



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

15.6" diagonal LED backlight FHD Slim eDP SVA (1920 x 1080) Touch with Camera	Outline Dimensions (W x H x D)	360.0 x 224.3 x 3.2 mm max
	Active Area	344.16 x 193.59 mm
	Weight	560 max.
	Diagonal Size	15.6"
	Surface Treatment	AG/BV
	Contrast Ratio	500:1 (typ) - BV, 400:1 (typ) - AG
	Touch Enabled	Yes
	TSP Type	Capacitive
	Refresh Rate	60Hz
	Response time	16ms typ.
	Pixel Per Inch (PPI)	142
	Brightness	300nits
	Pixel Resolution	Format 1920 x 1080 (FHD) Configuration RGB Stripe
	Interface	eDP 1.2 (2 lane)
	LCD Mode	TN
	Viewing Angle	SVA 45/45/25/35

15.6" diagonal LED backlight FHD Slim eDP UWVA Anti-glare non- touch (1920 x 1080)	Outline Dimensions (W x H x D)	360 x 224.3 x 3.2 mm max
	Active Area	344.2 x 193.5 mm
	Weight	360 max.
	Diagonal Size	15.6"
	Surface Treatment	AG
	Contrast Ratio	600:1 (typ)
	Refresh Rate	60Hz
	Response time	35ms typ.
	Pixel Per Inch (PPI)	142
	Brightness	300nits
	Pixel Resolution	Format 1920 x 1080 (FHD) Configuration RGB
	Interface	eDP 1.3 + PSR
	LCD Mode	IPS
	Viewing Angle	UWVA 85/85/85/85

Note: All display specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

STORAGE AND DRIVES

500 GB 7200rpm Self Encrypting Drive (FIPS-140-2) (Opal 2)	Drive Weight	0.21 lbs (95 g)
	Capacity	500 GB
	Height	0.28 in (7 mm)
	Width	2.75 in (69.85 mm)
	Interface	ATA-8, SATA 3.0
	Transfer Rate	Synchronous (maximum) 600 MB/s
	Seek Time (typical reads, including settling)	Single Track 1.5 ms Average 12ms Maximum 18mm-22ms
	Cache	32GB
	Rotational Speed	7200 rpm
	Logical Blocks	976,773,168
	Operating Temperature	32° to 140° F (0° to 60° C) [top cover temp]
	Features	ATA Security; TCG Opal 2.x, FIPS, S.M.A.R.T., NCQ, Ultra DMA ,

500 GB 7200rpm Hard Drive	Drive Weight	0.20 lbs (92 g)-0.21 lbs (95 g)
	Capacity	500 GB
	Height	0.28 in (7 mm)
	Width	2.75 in (69.85 mm)
	Interface	ATA-8, SATA 3.0
	Transfer Rate	Synchronous (maximum) 600 MB/s
	Seek Time (typical reads, including settling)	Single Track 1.5ms-2.0ms Average 11ms-13ms Maximum 18ms-22ms
	Cache	32GB
	Rotational Speed	7200 rpm
	Logical Blocks	976,773,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

500 GB 7200rpm Self-Encrypting Drive (Opal 2)	Drive Weight	0.21 lbs (95 g)
	Capacity	500GB
	Height	0.28 in (7 mm)
	Width	2.75 in (69.85 mm)
	Interface	ATA-8, SATA 3.0



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Transfer Rate	Synchronous (maximum)	600 MB/s
Seek Time (typical reads, including settling)	Single Track	1.5ms
	Average	12ms
	Maximum	18ms- 22ms
Cache		32GB
Rotational Speed		7200rpm
Logical Blocks		976,773,168
Operating Temperature		32° to 140° F (0° to 60° C) [top cover temp]
Features		ATA Security; TCG Opal 2.x, S.M.A.R.T., NCQ, Ultra DMA

1 TB 5400rpm Hard Drive

Drive Weight		0.21 lbs (94 g)- 0.21 lbs (99 g)
Capacity		1TB
Height		0.28 in (7.2 mm)
Width		2.75 in (69.85 mm)
Interface		ATA-8, SATA 3.0
Transfer Rate	Synchronous (maximum)	600 MB/s
Seek Time (typical reads, including settling)	Single Track	2ms
	Average	12ms-13ms
	Maximum	18ms-23ms
Cache		Up to 32GB
Rotational Speed		5400rpm
Logical Blocks		1,953,525,168
Operating Temperature		32° to 140° F (0° to 60° C) [case temp]
Features		S.M.A.R.T., NCQ, Ultra DMA

500 GB Hybrid, 8 GB cache

Drive Weight		0.21 lb (95 g)
Capacity		500 GB
Height		0.276 in (7 mm)
Width		2.76 in (70.1 mm)
Interface		ATA-8, SATA 2.6, 6.0 Gb/s, NCQ
Transfer Rate	Synchronous (maximum)	600 MB/s (Drive Capability)
Seek Time (typical reads, including settling)	Single Track	2 ms
	Average	12 ms
	Maximum	NIL ms
Cache		64GB
Rotational Speed		5400 rpm
Logical Blocks		976,773,168
Operating Temperature		32° to 140° F (0° to 60° C) [case temp]
Features		ATA Security



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

128 GB M2 2280 SATA-3 TLC Solid State Drive	Drive Weight	0.019 lb (8.5 g)-0.022 lb (10 g)	
	Capacity	128 GB	
	Height	0.09 in (2.23 mm)- 0.14 in (3.58 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Sequential Read	Sequential Write
		500 ~ 540 MB/s	130 ~ 450 MB/s
	Logical Blocks	250,069,680	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, DIPM; TRIM; DEVSLP	

180 GB M2 2280 SATA-3 MLC Solid State Drive	Drive Weight	0.022 lb (<10 g)	
	Capacity	180 GB	
	Height	0.09 in (2.23 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Sequential Read	Sequential Write
		540 MB/s	490 MB/s
	Logical Blocks	351,651,888	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, DIPM; TRIM; DEVSLP	

180 GB M2 2280 SATA-3 Self-Encrypting Drive (Opal 2) MLC Solid State Drive	Drive Weight	0.022 lb (<10 g)	
	Capacity	180GB	
	Height	0.09 in (2.23 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Sequential Read	Sequential Write
		540 MB/s	490 MB/s
	Logical Blocks	351,651,888	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, TCG OPAL 2.x, DIPM; TRIM; DEVSLP	

240 GB SATA-3 MLC Solid State Drive	Drive Weight	0.02 lb (10 g)
	Capacity	240 GB



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Height	0.14 in (3.58 mm)	
Width	0.87 in (22 mm)	
Interface	ACS-3, SATA 3.2	
Performance	Sequential Read	Sequential Write
	540 MB/s	490 MB/s
Logical Blocks	468,862,128	
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
Features	ATA Security, DIPM; TRIM; DEVSLP	

256 GB 2280 SATA-3 TLC Solid State Drive	Drive Weight	0.019 lb (8.5 g)- 0.022 lb (10 g)	
	Capacity	256GB	
	Height	0.09 in (2.3 mm)- 0.14 in (3.58 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Sequential Read	Sequential Write
		515 ~ 540 MB/s	260 ~ 515 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, DIPM; TRIM; DEVSLP	

256 GB M2 2280 SATA-3 Self-Encrypting Drive (Opal 2) MLC Solid State Drive	Drive Weight	0.02 lb (10 g)	
	Capacity	256 GB	
	Height	0.14 in (3.58 mm)- 0.09 in (2.23 mm)	
	Width	0.87 in (22 mm)	
	Interface	ATA-8, SATA 3.0	
	Performance	Sequential Read	Sequential Write
		450 ~ 540 MB/s	370 ~ 500 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security; TCG Opal 2.0, DIPM; TRIM; DEVSLP	

256 GB PCIe-3x4 NVMe Solid State Drive	Drive Weight	0.02 lb (10 g)	
	Capacity	256 GB	
	Height	0.09 in (2.3 mm)	
	Width	0.87 in (22 mm)	
	Interface	PCIe NVMe Gen3X4	
	Performance	Sequential Read	Sequential Write
		2,260 ~ 3,100 MB/s	1,100 ~ 1,400 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, TRIM; L1.2	



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

512 GB M2 2280 TLC Solid State Drive	Drive Weight	0.019 lb (8.5 g)- 0.02 lb (10 g)		
	Capacity	512 GB		
	Height	0.09 in (2.3 mm)		
	Width	0.87 in (22 mm)		
	Interface	ATA-8, SATA 3.0		
	Performance	Sequential Read	Sequential Write	
		500 ~ 540 MB/s	440 ~ 515 MB/s	
	Logical Blocks	1,000,215,216		
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]		
Features	ATA Security, DIPM; TRIM; DEVSLP			
512 GB M2 2280 SATA-3 Self-Encrypting Drive (Opal 2) MLC Solid State Drive	Drive Weight	0.01 lb (5.5 g)- 0.02 lb (10 g)		
	Capacity	512 GB		
	Height	0.09 in (2.3 mm)		
	Width	0.87 in (22 mm)		
	Interface	ATA-8, SATA 3.0		
	Performance	Sequential Read	Sequential Write	
		450 ~ 540 MB/s	400 ~ 500 MB/s	
	Logical Blocks	1,000,215,216		
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]		
Features	ATA Security; TCG Opal 2.0; DIPM; TRIM; DEVSLP			

SECURITY

HP Fingerprint Reader (optional)	Mobile Voltage Operation	3.0V-3.6V
	Operating Temperature	14° – 167°F (-10° – 75°C)
	Current Consumption Image	36 mA peak
	Low Latency Wait for Finger	950 uA
	Capture Rate	59000 lines/sec
	ESD Resistance	IEC 61000-4-2 4B (±15KV)
	Detection Matrix	200*1 (plus another secondary line) 508 dpi



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

10*1 mm sensor area

Smart Card Reader

Smart card standard	PC/SC 2.0 for Windows smart card standard
Dimensions (L x W x H)	0.41x 0.08 x 0.32 in (10.5 x 2 x 8.2 mm)
Smart Card support	ISO 7816 Class A and AB smart cards
Smart Card Interface	Smart Card Interface with T = 0 and T = 1 support Support I2C memory card, SLE4418, SLE4428, SLE4432, SLE4442, SLE4436, SLE5536, SLE6636, AT88SC1608, AT45D041 card and AT45DB041 card via external EEPROM
Operating systems	No driver is required for this device. Native support is provided by the operating system.
Power	Normal Mode With card present, before being suspended: 40.9 mA Without card present, before being suspended: 33.16 mA After being suspended with smart card present: 380 µA After being suspended without smart card present: 380 µA
	Power Saving Mode With card present, before being suspended: 40.6 mA Without card present: 380 µA After being suspended with smart card present: 380 µA
Features	<ul style="list-style-type: none">• Support single slot• Support T0, T1 protocol• Support I2C memory card, SLE4418, SLE4428, SLE4432, SLE4442, SLE4436,• SLE5536, SLE6636, AT88SC1608, AT45D041 card and AT45DB041 card via external EEPROM• Support ISO7816 Class A, B and C (5V/3V/1.8V) card• Implemented as an USB full speed device with bulk transfer endpoint, Mass• Storage endpoint• Built-in PLL for USB and Smart Card clocks requirement• Support EEPROM for USB descriptors customization (PID/VID/iManufacturer/iProduct/Serial Number), Direct Web Page Link, and accessing memory card module.



Technical Specifications

- EEPROM programmable via USB interface
- Support software update for memory card module
- Support Direct Web Page Link via configuration in external EEPROM
- Support short APDU and extended APDU
- Compatible with Microsoft USB-CCID driver
- Support remote wake up through inserting card/removing card
- Support USB selective suspend
- Support Power Saving Mode (Using one pin to select between Normal/PWR Saving Mode)
- Support card power over current protection mechanism
- Built in resonator.
- Support USB LPM (Link Power Management) features.
- Embedded clock source.

NETWORKING/COMMUNICATIONS

HP hs3110 HSPA+ Intel® Mobile Broadband Module*

Technology/Operating bands	HSPA+: 2100 (Band 1), 1900 (Band 2), 1700 (Band 4), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 MHz (Band 5), 900 (Band 8) MHz
Wireless protocol standards	WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9
GPS	Standalone, A-GPS
GPS bands	1575.42 MHz ± 1.023 MHz
Maximum data rates	HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) E-GPRS: 296 kbps (Download), 236.8 kbps (Upload) GPRS: 107 kbps (Download), 85.6 kbps (Upload)
Maximum output power	HSPA+: 24 dBm E-GPRS 1800/1900: 26 dBm E-GPRS 850/900: 27 dBm GPRS 1800/1900: 30 dBm GPRS 850/900: 33 dBm



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Maximum output power	HSPA+: 24 dBm E-GPRS 1800/1900: 26 dBm E-GPRS 850/900: 27 dBm GPRS 1800/1900: 30 dBm GPRS 850/900: 33 dBm
Maximum power consumption	HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average)
Form Factor	M.2, 3042-S3 Key B
Weight	6 g
Dimensions (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

HP lt4120 Qualcomm® Snapdragon™ X5 LTE Mobile Broadband Module

Technology/Operating bands	LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3), 1700/2100 (Band 4), 850 (Band 5), 2600 (Band 7), 900 (Band 8), 700 (Band 12 lower), 700 (Band 13 upper), 700 (Band 17 lower), 800 (Band 20), 700 (Band 28). HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz EV-DO: 850 (BC0), 1900 (BC1) MHz (Only work with Verizon network) E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
Wireless protocol standards	3GPP Release 10 LTE Specification CAT.4, 20MHz BW WCDMA R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

1xEVDO Release 0, A and B.

E-GPRS: Class B, Multi-slot class 12, coding schemes CS1 - CS4

and MSC1 - MSC9

GPS Standalone, A-GPS (MS-A, MS-B and XTRA)

GPS bands 1575.42 MHz \pm 1.023 MHz, GLONASS 1596-1607MHz

Maximum data rates LTE: 150 Mbps (Download), 50 Mbps (Upload)

DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload)

HSPA+: 21Mbps (Download), 5.76 Mbps (Upload)

CDMA 1xRTT: 153.6 kbps (Download), 153.6 kbps (Upload)

EVDO Rel.A: 3.1 Mbps (Download), 1.8 Mbps (Upload)

EVDO Rel.B: 14.7 Mbps (Download), 5.4Mbps (Upload)

EDGE: 236.8 kbps (Download), 236.8 kbps (Upload)

GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)

Maximum output power LTE: 23 dBm

HSPA+: 23.5 dBm

1xRTT/EVDO: 24dBm

E-GPRS 1900/1800: 26 dBm

E-GPRS 900/850: 27 dBm

GPRS 1900/1800: 29.5 dBm

GPRS 900/850: 32.5 dBm

Maximum power consumption LTE: 1,200 mA (peak); 900 mA (average)

HSPA+: 1,100 mA (peak); 800 mA (average)

1xRTT/EVDO: 1,000 mA (peak); 700 mA (average)

E-GPRS: 2,800 mA (peak); 500 mA (average)



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Dimensions 42 x 30 x 2.3 mm
(Length x Width x Thickness)

* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products or in all countries.

Intel® Dual Band Wireless-N 8260AC 802.11 a/b/g/n (2x2) WiFi + Bluetooth 4.2 Combo Adaptor* (vPro)

Wireless LAN Standards IEEE 802.11a
IEEE 802.11b
IEEE 802.11g
IEEE 802.11n

Interoperability Wi-Fi certified

Frequency Band 802.11b/g/n 2.402 - 2.482 GHz

Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels

802.11a 4.9 - 4.95 GHz (Japan)
5.15 - 5.25 GHz
5.25 - 5.35 GHz
5.47 - 5.725 GHz
5.825 - 5.850 GHz

Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)

Antenna Structure 2 transmit; 2 receive (2x2)

Data Rates 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11b: 1, 2, 5.5, 11 Mbps
802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)

Modulation Direct Sequence Spread Spectrum
CCK, BPSK, QPSK, 16-QAM, 64-QAM



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Security¹	<ul style="list-style-type: none">• IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only• AES-CCMP: 128 bit in hardware• 802.1x authentication• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.• WPA2 certification• IEEE 802.11i• Cisco Certified Extensions, all versions through CCX4 and CCX Lite• WAPI
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between band Access Points
Output Power²	<ul style="list-style-type: none">• 802.11b : +16dBm minimum• 802.11g : +14dBm minimum• 802.11a : +14dBm minimum• 802.11n HT20(2.4GHz) : +13dBm minimum• 802.11n HT40(2.4GHz) : +13dBm minimum• 802.11n HT20(5GHz) : +12dBm minimum• 802.11n HT40(5GHz) : +12dBm minimum
Power Consumption	Transmit: 2.0 Watts (max) Receive: 1.6 Watts (max) Idle mode ³ (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio off: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
Antenna Type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO and Bluetooth communications



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Form Factor	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm	
	Or	
	Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g	
	Or	
	Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (-10° to 70° C) -40° to 176° F (-40° to 80° C)
	Non-operating	
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11 a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Intel® Dual Band Wireless- Wireless LAN Standards IEEE 802.11a



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

**N 8260AC 802.11 a/b/g/n
(2x2) WiFi + Bluetooth 4.2
Combo Adaptor* (non-
vPro)**

IEEE 802.11b
IEEE 802.11g
IEEE 802.11n
IEEE 802.11ac

Interoperability

Wi-Fi certified

Frequency Band

802.11b/g/n

2.402 - 2.482 GHz

Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels

802.11a

- 4.9 - 4.95 GHz (Japan)
- 5.15 - 5.25 GHz
- 5.25 - 5.35 GHz
- 5.47 - 5.725 GHz
- 5.825 - 5.850 GHz

Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)

Antenna Structure

2 transmit; 2 receive (2x2)

Data Rates

802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

802.11b: 1, 2, 5.5, 11 Mbps

802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

802.11n: card will support rates for NSS=1 and NSS=2 for RX and TX for 20 and 40 MHz channels. Short and long guard interval shall be supported.

802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)

Modulation

Direct Sequence Spread Spectrum

BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM

Security¹

- IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only
- AES-CCMP: 128 bit in hardware
- 802.1x authentication
- WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.
- WPA2 certification
- IEEE 802.11i
- Cisco Certified Extensions, all versions through CCX4 and CCX Lite



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

	<ul style="list-style-type: none">• WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none">• 802.11b : +16dBm minimum• 802.11g : +14dBm minimum• 802.11a : +14dBm minimum• 802.11n HT20(2.4GHz) : +13dBm minimum• 802.11n HT40(2.4GHz) : +13dBm minimum• 802.11n HT20(5GHz) : +12dBm minimum• 802.11n HT40(5GHz) : +12dBm minimum• 802.11ac 80MHz(5GHz) : +11dBm minimum
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps) 802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11n:-69 dBm (150 Mbps), -66 dBm (300 Mbps)
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express Half-MiniCard
Dimensions	0.134 x 1.06 x 1.18 in (3.4 x 26.8 x 30 mm)



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Weight	3.1g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft. (3,048 m) Non-operating 0 to 50,000 ft. (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

Bluetooth Specification	4.2+EDR Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR
Receiver Sensitivity	Better than -20 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 330 mW



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

	Peak (Rx) 230 mW Selective Suspend 17 mW
Antenna	Internally integrated within module
Range	Up to 33 ft. (10 m)
Electrical Interface	USB 2.0 compliant
	Microsoft Windows Plug and Play compliant
Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth Profiles Supported	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX)



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Basic Imaging Profile (BIP)²
Headset Profile (HSP)
Hands Free Profile (HFP)
Advanced Audio Distribution Profile (A2DP)

1. Indicates the profile is supported by Microsoft Windows XP SP2

2. Indicates the profile is part of Windows Vista

* Wireless access point and internet service required. Availability of public wireless access points limited.

**Intel Dual Band Wireless- Wireless LAN
AC 3160 802.11 ac (1x1) Standards
WiFi and Bluetooth 4.0
Combo Adapter (non-vPro)**

IEEE 802.11a

IEEE 802.11b

IEEE 802.11g

IEEE 802.11n

IEEE 802.11ac

Interoperability

Wi-Fi certified

Frequency Band

802.11b/g/n

- 2.402 – 2.482 GHz

Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

802.11a/n

- 4.9 – 4.95 GHz (Japan)
- 5.15 – 5.25 GHz
- 5.25 – 5.35 GHz
- 5.47 – 5.725 GHz
- 5.825 – 5.850 GHz

Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)

Data Rates

- 802.11b: 1, 2, 5.5, 11 Mbps
- 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
- 802.11ac : MCS0 ~ MCS7, (1SS) (20MHz, 40MHz, and 80MHz)



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
Security¹	<ul style="list-style-type: none">• IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only• AES-CCMP: 128 bit in hardware• 802.1x authentication• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.• WPA2 certification• IEEE 802.11i• Cisco Certified Extensions, all versions through CCX4 and CCX Lite• WAPI
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none">• 802.11b : +16dBm minimum• 802.11g : +14dBm minimum• 802.11a : +14dBm minimum• 802.11n HT20(2.4GHz) : +13dBm minimum• 802.11n HT40(2.4GHz) : +13dBm minimum• 802.11n HT20(5GHz) : +12dBm minimum• 802.11n HT40(5GHz) : +12dBm minimum• 802.11ac 80MHz(5GHz) : +11dBm minimum
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

	802.11g, 54Mbps : -74dBm maximum
	802.11a, 6Mbps : -86dBm maximum
	802.11a, 54Mbps : -72dBm maximum
	802.11n, MCS07 : -69dBm maximum
	802.11n, MCS15 : -66dBm maximum
	802.11ac, 1SS, MCS-0 : -86dBm maximum
	802.11ac, 1SS, MCS-9 : -61dBm maximum
	802.11ac, 2SS, MCS-0 : -83dBm maximum
	802.11ac, 2SS, MCS-9 : -58dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
Weight	Type 2230 : 2.8g Or Type 1630 : 2g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)



Technical Specifications

Near Field Communications Controller

Dimensions (L x W x H)	Module 25 mm by 10 mm by 2.0 mm
Chipset	NPC100
System interface	I ² C
NFC RF standards	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 ISO/IEC 18092 ECMA-340 NFCIP-1 Target and Initiator ECMA-320 NFCIP-2
NFC Forum Support	Tag Type 1, Type 2, Type3 and Type 4, NFCIP-1 and NFCIP-2
Reader (PCD-VCD) Mode(1)	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 MIFARE 1K MIFARE 4K MIFARE DESFire FeliCa Jewel and Topaz cards
Card Emulation (PICC-VICC) Mode(1)	ISO/IEC 14443 A ISO/IEC 14443 B and B' MIFARE FeliCa
Frequency	13.56 MHz



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

NFC Modes Supported	Reader/Writer, Peer-to-Peer, Card Emulation	
Raw RF Data Rates	106, 212, 424, 848 kbps	
Operating temperature	0°C to 70°C	
Storage temperature	-20°C to 125°C	
Humidity	10-90% operating 5-95% non-operating	
Supply Operating voltage	2.97 to 5.5 Volts	
I/O Voltage	1.8V or 3.3V	
Power Consumption (Booster enable, VBAT= 3.3V, VCC_BOOST = 5V)	Mode	Power Consumption, Typical⁽²⁾
	Polling	7.3 mA
	Detected Test Tag Type 1	Total 283.8 mA Net Module 236.8 mA
	Detected Test Tag Type 2	Total 288.8 mA Net Module 241.8 mA
	Detected Test Tag Type 3	Total 287.7 mA Net Module 240.7 mA
	Detected Test Tag Type 4	Total 282.3 mA Net Module 235.3 mA
Antenna	Antenna connector, 0.5mm pitch, 7 connector FPC. Antenna matching is external to module.	

Intel® I219-V Gigabit Network Connection

Ethernet Features

10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
100 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

8023. Clauses 40)
Auto-Negotiation (Automatic Speed Selection)
Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
IEEE 802.1p QoS (Quality of Service) Support
IEEE 802.1q VLAN support
IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
IEEE 802.3az EEE(Energy Efficient Ethernet)
Jumbo Frame 9K
Auto MDI/MDIX Crossover cable detection

Power Management

ACPI compliant - multiple power modes
Energy Detect Low Power Mode(Green Ethernet)

Performance Features

TCP/IP/UDP Checksum Offload (configurable)
Protocol Offload(ARP & NS)
Large send offload and Giant send offload
Receiving Side Scaling
MACSec Offload (802.3ae)
Intel Non-vPro
iSCSI Boot

Manageability

Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)
PXE 2.1 Remote Boot
Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))
Comprehensive diagnostic and configuration software suite
Virtual Cable Doctor for Ethernet cable status

Interface

PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ.
NOTE: Intel 82579 PCIe interface is not PCIe compliant. It operates at half of PCIe specification V1.1 (2.5GT/S) speed.

NIC Device Driver Name

Intel 82579LM/82579V Ethernet Network Connection

Intel® I219-LM Gigabit Network Connection

Ethernet Features

10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
100 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses



Technical Specifications

	13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023. Clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE(Energy Efficient Ethernet) Jumbo Frame 9K Auto MDI/MDIX Crossover cable detection
Power Management	ACPI compliant - multiple power modes Energy Detect Low Power Mode(Green Ethernet)
Performance Features	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload(ARP & NS) Large send offload and Giant send offload Receiving Side Scaling MACSec Offload (802.3ae) Intel vPro iSCSI Boot
Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status
Interface	PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ. NOTE: Intel 82579 PCIe interface is not PCIe compliant. It operates at half of PCIe specification V1.1 (2.5GT/S) speed.
NIC Device Driver Name	Intel 82579LM/82579V Ethernet Network Connection



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

AUDIO/MULTIMEDIA

Hardware	Implementation	CX7501
	Function Key Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Line in/Line out	Yes via dock
	Headphone/Microphone In	Yes combo jack
	Integrated Microphone	Yes, dual digital microphone array
Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit
Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

POWER

HP 45W Smart
AC Adapter

Dimensions (H x W x D)	3.74 x 1.57 x 1.04 in (9.5 x 4.0 x 2.65 cm)
Weight	0.386 lb (175g) max



Not all configuration components are available in all regions/countries.
c04688005 – DA 15295 – World Wide – Version 22 – April 17, 2017

QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Input	90 to 265 VAC
	Input Efficiency 87.74% at 115Vac and 88.4% at 230Vac
Output	Input frequency range 47 to 63 Hz
	Input AC current 1.4 A at 90 VAC
	Output power 45W
	DC output 19.5V
	Hold-up time 5 msec at 115 VAC input
	Output current limit <8.0A
	Connector 3 pin/grounded, mates with interchangeable cords
Environmental Design	Operating temperature 32° to 95° F (0° to 35° C)
	Non-operating (storage) temperature -4° to 185° F (-20° to 85° C)
	Altitude 0 to 16,400 ft (0 to 5,000 m)
	Humidity 20% to 95%
	Storage Humidity 10% to 95%
EMI and Safety Certifications	*CE Mark - full compliance with LVD and EMC directives * Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. * MTBF - over 200,000 hours at 25°C ambient condition.

HP 65W Smart AC Adapter EM

Dimensions	4.98 x 1.97 x 1.18 in (12.65 x 5.0 x 3.0 cm)
Weight	0.62 lb (290g) max
Input	90 to 265 VAC
	Input Efficiency 87% min at 115 VAC
Output	Input frequency range 47 to 63 Hz
	Input AC current 1.7 A at 90 VAC
	Output power 65W
	DC output 19.5V
	Hold-up time 5 msec at 115 VAC input
	Output current limit <11.0A
	Connector 3 pin/grounded, mates with interchangeable cords
Environmental Design	Operating temperature 32° to 95° F (0° to 35° C)
	Non-operating (storage) temperature -4° to 185° F (-20° to 85° C)
	Altitude 0 to 16,400 ft (0 to 5,000 m)
	Humidity 20% to 95%
	Storage Humidity 10% to 95%
EMI and Safety Certifications	*CE Mark - full compliance with LVD and EMC directives * Worldwide safety standards - IEC60950, EN60950, UL60950, Class1,



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.

* MTBF - over 200,000 hours at 25°C ambient condition.

HP 3-cell Long Life Li-Ion (44.5 WHr) – HP EliteBook 820 G3	Dimensions (H x W x L)	8.30 mm x 127.5 mm x 160.25 mm
	Weight	213g (ATL), 211.1g (SDI)
	Cells/Type	ATL 505295, SDI 505295
	Energy	Voltage 11.4V
		Amp-hour capacity 3910mAh
		Watt-hour capacity 44.5Wh
	Temperature	Operating (Charging) 0~45 C
		Operating (Discharging) -10~60 C
		Non-operating 5~40 C
	Fuel Gauge LED	NA

Warranty 1000 cycles >65% (at 23 °C)

Optional Travel Battery Available No

HP 3-cell Long Life Li-Ion (46.5 WHr) – HP EliteBook 840 & 850 G3	Dimensions (H x W x L)	6.8mm x 102.8mm x 198mm
	Weight	216.3g (ATL), 217.8g (COS)
	Cells/Type	ATL 506480, COSLIGHT 506480
	Energy	Voltage 11.4V
		Amp-hour capacity 4080mAh
		Watt-hour capacity 46.5Wh
	Temperature	Operating (Charging) 0~45 C
		Operating (Discharging) -10~60 C
		Non-operating 5~40 C
	Fuel Gauge LED	NA

Warranty 1000 cycles >65% (at 23 °C)

Optional Travel Battery Available No

ENVIRONMENTAL

HP EliteBook 820 G3 Notebook PC



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Eco-Label Certifications & declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- US Federal Energy Management Program (FEMP)
- EPEAT <Gold> registered in the United States. See <http://www.epeat.net> for registration status in your country.

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a “Typically Configured Notebook”.

Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	8.79 W	9.05 W	8.85 W
Normal Operation (Long idle)	6.35 W	6.7 W	6.63 W
Sleep	0.85 W	0.96 W	0.84 W
Off	0.38 W	0.48 W	0.37 W

Note:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short	30 BTU/hr	31 BTU/hr	30 BTU/hr



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

idle)

Normal Operation (Long idle)	22 BTU/hr	23 BTU/hr	23 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	1 BTU/hr	2 BTU/hr	1 BTU/hr

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Emissions (in accordance with ISO 7779 and ISO 9296)	Noise	Sound Power (L_{WAd}, bels)	Sound Pressure (L_{pAm}, decibels)
Typically Configured – Idle		2.8	20
Fixed Disk – Random writes		3.0	21

Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port
- 2 SODIMM memory slots
- Optional expansion base docking station
- 1 multi-bay II storage port
- Interchangeable HDD

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:
 Mercury greater the 1ppm by weight



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

Battery size: 6-cell high capacity Lithium-Ion battery (optional 8 cell available)

Battery type:

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the < gold > level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0% post-consumer recycled plastic (by wt.)
- This product is 96.6% recycle-able when properly disposed of at end of life.

Packaging Materials

External:	PAPER/Corrugated	329.5 g
Internal:	PLASTIC/EPE (Expanded Polyethylene)	38 g
	PLASTIC/Polyethylene low density	14.5 g
	PLASTIC/Polypropylene	3.2 g

The plastic packaging material contains at least 50% recycled content.

The corrugated paper packaging materials contains at least 70% recycled content.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances



Technical Specifications

- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



Technical Specifications

**Hewlett-Packard
Corporate
Environmental
Information**

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842>

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

HP EliteBook 840 G3 Notebook PC

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT <Gold> registered in the United States. See <http://www.epeat.net> for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a “Typically Configured Notebook”.

**Energy Consumption
(in accordance with US
ENERGY STAR® test
method)**

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Sort idle)	8.12 W	8.66 W	8.39 W
Normal Operation (Long idle)	6.23 W	7.64 W	6.77 W
Sleep	0.86 W	1.0 W	0.84 W



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Off	0.37 W	0.49 W	0.37 W
-----	--------	--------	--------

Note:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	28 BTU/hr	30 BTU/hr	29 BTU/hr
Normal Operation (Long idle)	21 BTU/hr	26 BTU/hr	23 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Emissions (in accordance with ISO 7779 and ISO 9296)	Noise	Sound Power (L_{WAd}, bels)	Sound Pressure (L_{pAm}, decibels)
Typically Configured – Idle		2.9	22
Fixed Disk – Random writes		3.0	24

Longevity and Upgrading This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port
- 2 SODIMM memory slots
- Optional expansion base docking station
- 1 multi-bay II storage port
- Interchangeable HDD

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:
Mercury greater than 1ppm by weight
Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)
Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <Gold> level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0.0% post-consumer recycled plastic (by wt.)
- This product is 95.7% recycle-able when properly disposed of at end of life.

Packaging Materials

External:	PAPER/Corrugated	268.8 g
Internal:	PLASTIC/EPE (Expanded Polyethylene)	91.9 g
	PLASTIC/Polyethylene low density	13.6 g
	PLASTIC/Polypropylene	5.5g

The plastic packaging material contains at least 50.0% recycled content.
The corrugated paper packaging materials contains at least 70.0% recycled content.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):



Technical Specifications

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842>

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

HP EliteBook 850 G3 Notebook PC

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT <Gold> registered in the United States. See <http://www.epeat.net> for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".

Energy Consumption (in accordance with US ENERGY STAR® test method)

115VAC, 60Hz

230VAC, 50Hz

100VAC, 60Hz



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Normal Operation (Short idle)	9.06 W	9.98 W	9.6 W
Normal Operation (Long idle)	7.31 W	7.82 W	8.0 W
Sleep	0.76 W	0.89 W	0.75 W
Off	0.44 W	0.56 W	0.43 W

Note:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	31 BTU/hr	34 BTU/hr	33 BTU/hr
Normal Operation (Long idle)	25 BTU/hr	27 BTU/hr	27 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	2 BTU/hr	2 BTU/hr	1 BTU/hr

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Emissions (in accordance with ISO 7779 and ISO 9296)	Noise	Sound Power (L_{WAd}, bels)	Sound Pressure (L_{pAm}, decibels)
--	--------------	--	---

Typically Configured – 2.9 20



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

Idle

Fixed Disk – Random writes 2.9 21

Longevity and Upgrading This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port
- 2 SODIMM memory slots
- Optional expansion base docking station
- 1 multi-bay II storage port
- Interchangeable HDD

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 1ppm by weight
- Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0% post-consumer recycled plastic (by wt.)
- This product is 96.1% recycle-able when properly disposed of at end of life.

Packaging Materials

External:	PAPER/Cardboard & misc	360.2 g
Internal:	PLASTIC/EPE (Expanded Polyethylene)	29.8 g
	PLASTIC/Polyethylene low density	13.6 g
	PLASTIC/Polypropylene	6 g

The plastic packaging material contains at least 50% recycled content.
The corrugated paper packaging materials contains at least 70% recycled content.



Technical Specifications

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Technical Specifications

End-of-life Management and Recycling Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

For more information about HP's commitment to the environment:

Hewlett-Packard Corporate Environmental Information

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

Country of Origin

China



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Options and Accessories (Sold separately and availability may vary by country.)

Type	Description	Part #
Batteries	HP Notebook Power Bank	N9F71AA
	HP SN03XL Rechargeable Battery (820 G3)	T7B33AA
	HP CS03XL Rechargeable Battery (840, 850 G3)	T7B32AA
Cases	HP Essential Top Load Case (up to 15.6")	H2W17AA
	HP Business Backpack (up to 17.3")	H5M90AA
	HP Business Case (up to 15.6")	H5M92AA
Docking	HP 3005pr USB 3.0 Port Replicator	H1L08AA
	HP UltraSlim Docking Station	D9Y32AA
	HP Display and Notebook Stand II	E8G00AA
	HP Adjustable Dual Display Stand	AW664AA
	HP USB-C Travel Dock	TOK29AA
	HP USB Travel Dock	TOK30AA
Input/Output Devices	HP 2.4 GHz Keyboard and Mouse	G1K29AA
	HP Slim Wireless Keyboard and Mouse	T6L04AA
	HP Wireless (Link-5) Keyboard	T6U20AA
	HP Touch to Pair Mouse	H6E52AA
	HP Comfort Grip Wireless Mouse	H2L63AA
	HP USB Travel Mouse	G1K28AA
	HP Slim Bluetooth Mouse	F3J92AA
	HP Ultrathin Wireless Mouse SE	L9V77AA
	HP UC Wired Headset	K7V17AA
	HP UC Speaker Phone	K7V16AA
	HP Conferencing Keyboard	K8P74AA
Adapters	HP Wireless Display Adapter	J1V25AA
	HP USB-C to USB 3.0 Adapter	N2Z63AAA
	HP DisplayPort to HDMI 1.4 Adapter	F3W43AA
	HP DisplayPort to VGA	F7W97AA
Memory	HP 4GB 2133MHz DDR4 Memory	T7B76AA
	HP 8GB 2133MHz DDR4 Memory	T7B77AA
Power Adapters	HP 65W Slim AC Adapter	H6Y82AA#xxx
	HP 45W Smart AC Adapter	H6Y88AA#xxx
	HP 65W Smart AC Adapter	H6Y89AA#xxx
	HP 90W Slim Combo AC Adapter w/USB	H6Y84AA#xxx
External Drives	HP USB External DVDRW Drive	F2B56AA
Security	HP Docking Station Cable Lock	AU656AA
	HP UltraSlim Keyed Cable Lock	H4D73AA
	HP 12.5" Notebook PC Privacy Filter (non-touch screens)	J6E64AA
	HP 14.1" Notebook PC Privacy Filter (non-touch screens)	J6E65AA
	HP 15.6" Notebook PC Privacy Filter (non-touch screens)	J7H71AA
Displays	HP EliteDisplay E240 23.8-inch Monitor	M1N99AA
	HP EliteDisplay E272Q 27-inch QHD Monitor	M1P04AA
	HP EliteDisplay E240c 23.8-inch Video Conferencing Monitor	M1P00AA
	HP EliteDisplay S140u 14-inch USB Portable Monitor	G8R65AA



QuickSpecs

HP EliteBook 820 G3 Notebook PC
HP EliteBook 840 G3 Notebook PC
HP EliteBook 850 G3 Notebook PC

Summary of Changes

Date of change:	Version History:		Description of change:
January 11, 2016	V1 to v2	Updated	Military testing and footnote page 7 Battery life and stand by time page 17
January 19, 2016	V2 to V3	Updated	Weight for 850 Non-Touch and Touch page 18
January 21, 2016	V3 to v4	Added	Environmental information
March 4, 2016	V4 to v5	Added	Battery recharge times
March 29, 2016	V5 to v6	Updated	Disclaimer for TPM Memory up to 32 GB for HP EliteBook 840 and 850
April 6, 2016	V6 to v7	Changed Added	1920 x 1080 displays specs Memory configurations 512 GB SATA-3 Self-Encrypting (Opal 2) MLC Solid State Drive
April 7, 2016	V7 to v8	Added	More battery life details
April 12, 2016	V8 to v9	Added	Details for 512 GB M2 2280 SATA-3 Self-Encrypting Drive (Opal 2) MLC Solid State Drive
April 25, 2016	V9 to v10	Removed Added	HP USB-C to RJ45/USB 3/USB-C - N2Z64AA HP USB-C Travel Dock - TOK29AA HB USB Travel Dock - TOK30AA
May 16, 2016	V10 to v11	Changed	Weights
May 19, 2016	V11 to v12	Added	HP Sure View (840 only)
June 6, 2016	V12 to v13	Changed	HP Sure View specs (840 only)
June 13, 2016	V13 to v14	Changed	840 Privacy Screen name.
July 5, 2016	V14 to v15	Added	840 Privacy Screen numeric key functions, DisplayPort version
September 12, 2016	V15 to v16	Updated	WiDi Footnote
September 19, 2016	V16 to v17	Removed	Cyberlink Power DVD, BD software
		Added	Optimizes image quality under low light conditions and fixed focus lens note.
September 29, 2016	V17 to V18	Added	Add SIM type/dimension info in 'Slots' section
October 11, 2016	V18 to V19	Updated	Updated specs for Intel 3165 1x1ac WLAN update from 4.0 to 4.2
October 13, 2016	V19 to V20	Updated	Chipset information updated, Intel® Core i5 with vPro and Core i7 with vPro.
March 19, 2017	V20 to V21	Updated	Displays section updated (Added displays and modified weights)
April 17, 2017	V210 to V22	Updated	Storage and Drives section updated

Copyright © 2016 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty.

HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Core, and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of its proprietor used by HP, INC. under license. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

