


## Overview

### HP 240 G5 Notebook PC

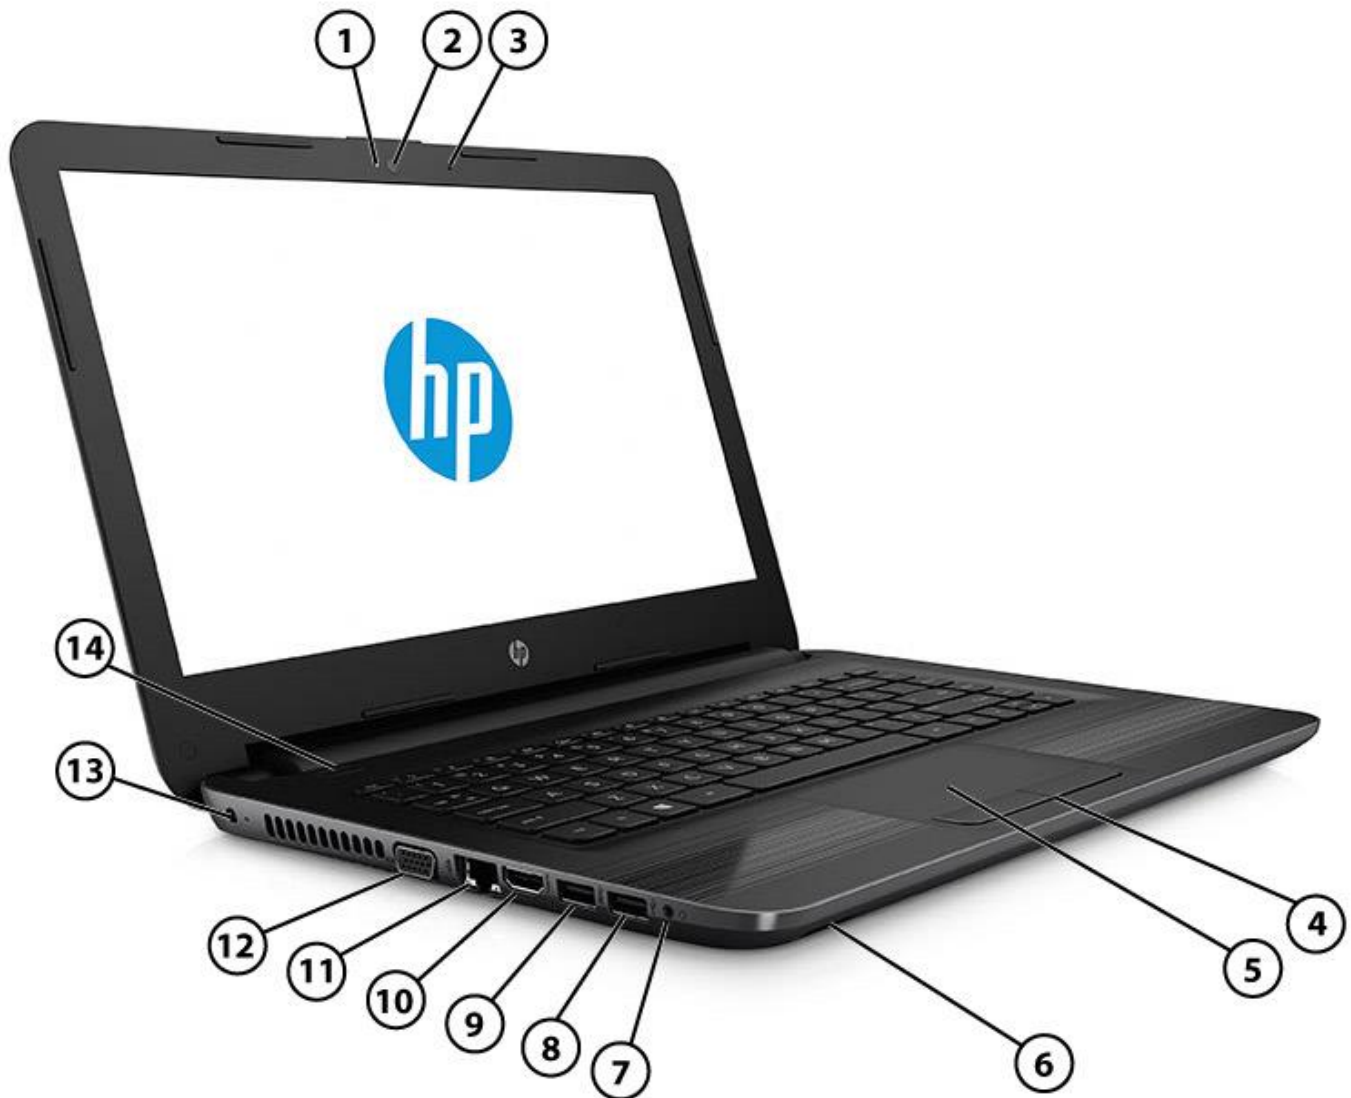

#### Front/ Left

- |                            |                   |
|----------------------------|-------------------|
| 1. Webcam LED              | 8. USB 2.0 port   |
| 2. Webcam                  | 9. USB 3.0 port   |
| 3. Microphone              | 10. HDMI port     |
| 4. Touchpad buttons        | 11. Ethernet port |
| 5. Touchpad                | 12. VGA port      |
| 6. SD Card slot            | 13. Power jack    |
| 7. Audio in/out combo jack | 14. Power button  |



## Overview



1. Power indicator LED
2. Hard drive indicator LED
3. USB 2.0 port


### Rear/ Right

4. Optical drive (optional)
5. Security lock slot



## Overview

### HP 250 G5 Notebook PC

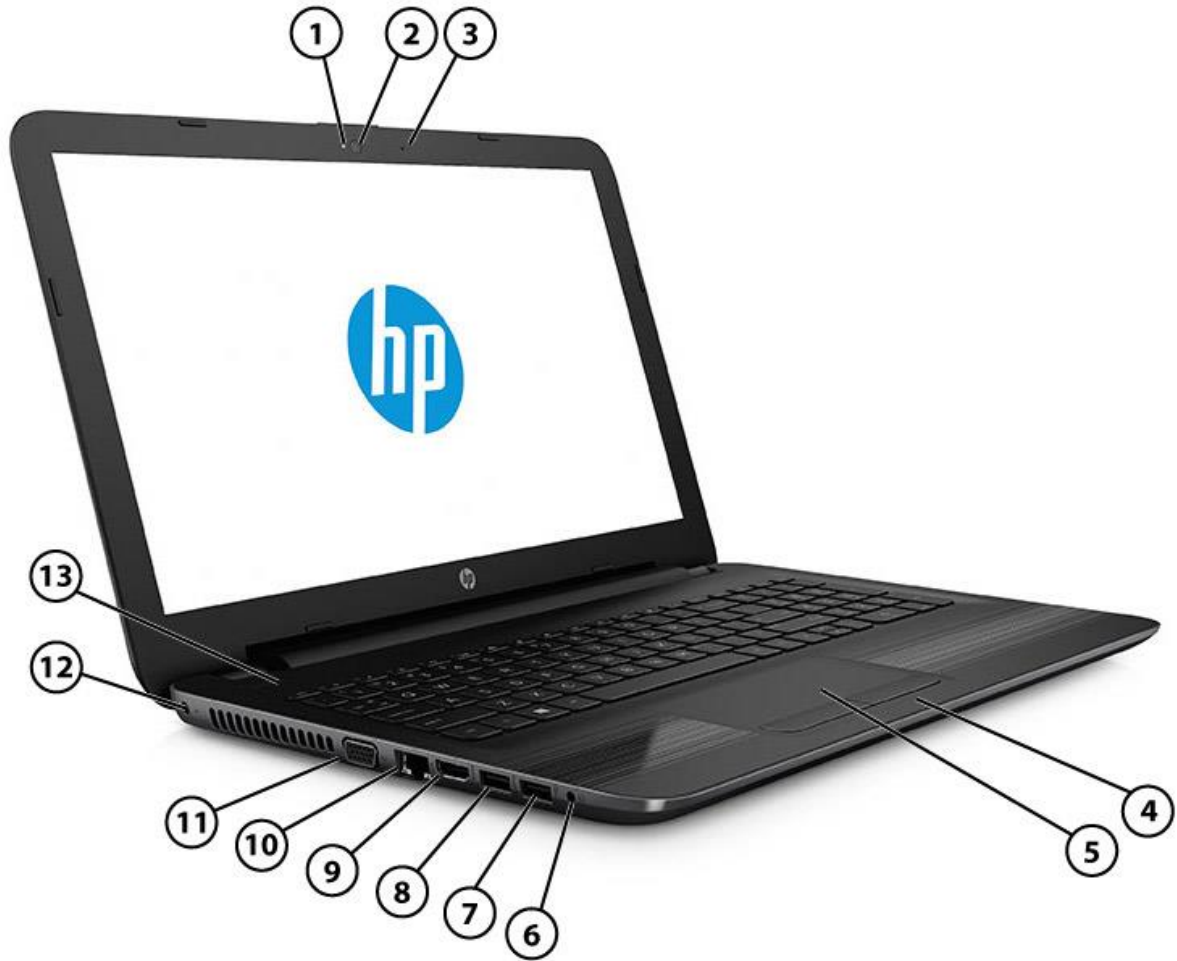

#### Front/ Left

- |                            |                   |
|----------------------------|-------------------|
| 1. Webcam LED              | 8. USB 3.0 port   |
| 2. Webcam                  | 9. HDMI port      |
| 3. Microphone              | 10. Ethernet port |
| 4. Touchpad buttons        | 11. VGA port      |
| 5. Touchpad                | 12. Power jack    |
| 6. Audio in/out combo jack | 13. Power button  |
| 7. USB 2.0 port            |                   |



## Overview



1. Power indicator LED , Hard drive indicator LED
2. SD Card slot
3. USB 2.0 port

### Rear/ Right

4. Optical drive (optional)
5. Security lock slot



### Overview

#### AT A GLANCE

- Windows 10 versions, Windows 7 Professional (Available through downgrade rights from Windows 10 Pro 64), or FreeDOS 2.0
- Choice of the latest Intel® Core™, Intel® Pentium®, or Intel® Celeron® processors
- Intel® HD Graphics or AMD Radeon™ R5 (Up to 2 GB of dedicated video memory) (HP 250 G5 only)
- Display choices include:
  - HP 240 G5: 14.0" diagonal HD
  - HP 250 G5: 15.0" diagonal HD or FHD
- Choice of hard drives up to 1 TB, hybrid drives up to 1 TB SSHD with 8 GB NAND (HP 250 G5 only) or solid state drives up to 256 GB (HP 250 G5 only)
- Weight starting at:
  - HP 240 G5: 3.95 lbs (1.79 kg)
  - HP 250 G5: 4.32 lbs (1.96 kg)
- Security features including FW TPM 2.0 and lock slot (cable not included)
- Keyboard
  - Full size textured island-style keyboard on the HP 240 G5
  - Full size textured island-style keyboard with numeric pad on the HP 250 G5
- Touchpad with gestures support
- HP webcam with single digital microphone and HD or VGA camera
- HD Audio with DTS Studio Sound™ optimized for high fidelity audio
- One USB 3.0 port and two USB 2.0 ports
- Wireless LAN (WLAN) up to 802.11ac to keep you connected

**NOTE:** See important legal disclosures for all listed specs in their respective features sections.



### Features

#### PRODUCT NAMES

HP 240 G5 Notebook PC

HP 250 G5 Notebook PC

#### OPERATING SYSTEM

##### Preinstalled

Windows 10 Pro 64<sup>1</sup>

Windows 10 Home 64<sup>1</sup>

Windows 7 Professional 64 (Available through downgrade rights from Windows 10 Pro 64)<sup>2</sup>

FreeDOS 2.0

**NOTE:** In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://http://www.microsoft.com>.
2. This system is preinstalled with Windows 7 Professional software and also comes with a license and media for Windows 10 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.



### Features

#### PROCESSORS

##### HP 240 G5

- Intel® Core™ i5-6200U with Intel® HD Graphics 520  
(2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)<sup>1</sup>
- Intel® Core™ i5-7200U with Intel® HD Graphics 620  
(2.5 GHz, up to 3.1 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)<sup>1</sup>
- Intel® Core™ i3-6100U with Intel® HD Graphics 520  
(2.3 GHz, 3 MB cache, 2 cores)<sup>1</sup>
- Intel® Core™ i3-7100U with Intel® HD Graphics 620  
(2.4 GHz, 3 MB cache, 2 cores)<sup>1</sup>
- Intel® Core™ i3-5005U with Intel® HD Graphics 5500  
(2.0 GHz, 3 MB cache, 2 cores)<sup>1</sup>
- Intel® Celeron® N3060 with Intel® HD Graphics 400  
(1.6 GHz, up to 2.48 GHz with Intel® Turbo Boost Technology, 2 MB cache, 2 cores)<sup>1</sup>
- Intel® Pentium® A1020 with Intel® HD Graphics (Only available for India and Indonesia)  
(2.41 GHz, up to 2.66 GHz with Intel® Turbo Boost Technology) 2 MB cache, 4 cores)<sup>1</sup>
- Intel® Pentium® 4405U with Intel® HD Graphics 520  
(2.1 GHz, 2 MB cache, 2 cores)<sup>1</sup>
- Intel Core i3-6006U with Intel® HD Graphics 520  
(2.0 GHz, 3 MB cache, 2 cores)
- Intel Celeron® 3955U with Intel® HD Graphics 510  
(2.0 GHz, 2 MB cache, 2 cores)
- Intel Celeron® 3855U with Intel® HD Graphics 510  
(1.60 GHz, 2 MB cache, 2 cores)
- Intel Core i7-7500U with Intel® HD Graphics 620  
(2.7 GHz, up to 3.5 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)
- Intel Pentium 3825U with Intel® HD Graphics 5500  
(1.90 GHz, 2 MB caches, 2 cores)
- Intel Celeron N3350 with Intel® HD Graphics 500  
(1.1 GHz, up to 2.4 GHz with Intel® Turbo Boost Technology, 2 MB cache, 2 cores)

##### HP 250 G5

- Intel® Core™ i7-6500U with Intel® HD Graphics 520  
(2.5 GHz, up to 3.1 GHz with Intel Turbo Boost Technology, 4 MB cache, 2 cores)<sup>1</sup>
- Intel® Core™ i7-7500U with Intel® HD Graphics 620  
(2.7 GHz, up to 3.5 GHz with Intel Turbo Boost Technology, 4 MB cache, 2 cores)<sup>1</sup>
- Intel® Core™ i5-6200U with Intel® HD Graphics 520  
(2.3 GHz, up to 2.8 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)<sup>1</sup>
- Intel® Core™ i5-7200U with Intel® HD Graphics 620  
(2.5 GHz, up to 3.1 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)<sup>1</sup>
- Intel® Core™ i3-5005U with Intel® HD Graphics 5500  
(2.0 GHz, 3 MB cache, 2 cores)<sup>1</sup>
- Intel® Pentium® N4200 with Intel® HD Graphics 505  
(1.10 GHz, up to 2.5 GHz with Intel® Turbo Boost Technology, 2 MB cache, 4 cores)<sup>1</sup>
- Intel® Pentium® N3710 with Intel® HD Graphics 405



## Features

(1.60 GHz, up to 2.56 GHz with Intel® Turbo Boost Technology, 2 MB cache, 4 cores)<sup>1</sup>

Intel® Celeron® N3060 with Intel® HD Graphics 400

(1.6 GHz, up to 2.48 GHz with Intel® Turbo Boost Technology, 2 MB cache, 2 cores)<sup>1</sup>

Intel® Celeron® N3350 with Intel® HD Graphics 500

(1.10 GHz, up to 2.4 GHz with Intel® Turbo Boost Technology, 2 MB cache, 2 cores)<sup>1</sup>

Intel Core i3-6006U with Intel® HD Graphics 520

(2GHz, 3MB cache, 2 cores)

Intel Celeron® 3955U with Intel® HD Graphics 520

(2.0GHZ, 2MB cache, 2 cores)

### Processors Family

7th Generation Intel® Core™ i3 processor (i3-7100U model)

7th Generation Intel® Core™ i5 processor (i5-7200U model)

7th Generation Intel® Core™ i7 processor (i7-7500U model)

6th Generation Intel® Core™ i3 processor (i3-6100U, i3-6006U)

6th Generation Intel® Core™ i5 processor (i5-6200U)

6th Generation Intel® Core™ i7 processor (i7-6500U)

6th Generation Intel® Celeron® processor (3955U, 3855U)

6th Generation Intel® Pentium® processor (4405U)

5th Generation Intel® Core™ i3 processor (i3-5005U)

5th Generation Intel® Pentium® processor (3825U)

Intel Apollolake processor (Pentium N4200, Celeron N3350)

Intel Braswell processor (Pentium N3710, Celeron N3060)

**NOTE:** In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

1. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

## CHIPSET

Integrated with processor

## GRAPHICS

### HP 240 G5

#### Integrated

Intel® HD Graphics 620<sup>1</sup>

Intel® HD Graphics 520<sup>1</sup>

Intel® HD Graphics 5500<sup>1</sup>

Intel® HD Graphics 400<sup>1</sup>

Support HD Decode, DX12, and HDMI

Intel® HD Graphics 510<sup>1</sup>

### HP 250 G5





## Features

### Integrated

Intel® HD Graphics 505<sup>1</sup>  
Intel® HD Graphics 520<sup>1</sup>  
Intel® HD Graphics 550<sup>1</sup>  
Intel® HD Graphics 5500<sup>1</sup>  
Intel® HD Graphics 405<sup>1</sup>  
Intel® HD Graphics 400<sup>1</sup>

### Discrete (HP 250 G5 only)

AMD Radeon™ R5 (Up to 2 GB of dedicated video memory)<sup>2</sup>  
Support HD Decode, DX12, and HDMI

1. HD content required to view HD images.
2. AMD Dynamic Switchable Graphics technology requires an Intel processor, plus an AMD Radeon™ discrete graphics configuration and is not available on FreeDOS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be).

## DISPLAY

### HP 240 G5

#### Internal

14.0" diagonal WLED HD Anti-glare Slim (1366 x 768), SVA<sup>1</sup>

#### VGA

Port supports resolutions up to 1920 x 1200 external resolution @ 60 Hz

#### HDMI

Port supports resolutions up to 1920 x 1080 external resolution @ 60 Hz

### HP 250 G5

#### Internal

15.6" diagonal WLED HD Anti-glare Slim (1366 x 768) SVA<sup>1</sup>  
15.6" diagonal WLED FHD Anti-glare Slim (1920 x 1080) SVA<sup>1</sup>

#### VGA

Port supports resolutions up to 2560 x 1200 external resolution @ 60 Hz

#### HDMI

Port supports resolutions up to 1920 x 1080 external resolution @ 60 Hz

1. HD content required to view HD images.

**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

## STORAGE AND DRIVES

### Primary Storage Bay

Support all 7mm/9.5mm, SATA 2.5" Hard Drives

### HP 240 G5

#### Hard Drives<sup>1</sup>

500 GB 5400 rpm SATA (7/9.5 mm)



### Features

500 GB 7200 rpm SATA (7 mm)  
1 TB 5400 rpm SATA (9.5 mm)

#### HP 250 G5

##### Hard Drives<sup>1</sup>

500 GB 5400 rpm SATA (7/9.5 mm)  
500 GB 7200 rpm SATA (7 mm)  
1 TB 5400 rpm SATA (9.5 mm)  
1 TB Hybrid

##### Solid State Drives<sup>1</sup> (HP 250 G5 only)

M.2 SATA-3  
128 GB SATA-3  
256 GB SATA-3  
1 TB 5400RPM SSHD w/8GB NAND (9.5mm)

1. For hard drives and solid state drives, GB = 1 billion bytes, TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and up to 30 GB (for Windows 10) of system disk is reserved for the system recovery software.

### OPTICAL DRIVES

#### Fixed 9.5 mm SATA Fixed

DVD+/-RW SuperMulti DL<sup>1,2</sup>  
DVD Writer Drive<sup>1,3</sup>

1. Unit shipped with either “DVD+/-RW SuperMulti DL” or “DVD Writer Drive.” Units undergoing repairs may be returned with a “DVD+/-RW SuperMulti DL.”
2. HD-DVD disks cannot be played on this drive. Note that DVD-RAM cannot read or write to 2.6 GB Single Sided/5.2 GB Double Sided – Version 1.0 media. Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs; discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.
3. HD-DVD disks cannot be played on this drive. No support for DVDRAM. Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs; discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

### MEMORY

**DDR4** (Intel® Core™ i7-6500U, i5-6200U, i3-6100U processors only)  
DDR4-2133 (Transfer rates up to 2133 MT/s)  
Dual channel support  
Non customer accessible / upgradeable

#### Configuration

4096 MB Total System Memory (2048 MB x 2) (HP 250 G5 only)  
4096 MB Total System Memory (4096 MB x 1)



## Features

6144 MB Total System Memory (2048 MB x 1 + 4096 MB x 1)  
8192 MB Total System Memory (4096 MB x 2)  
8192 MB Total System Memory (8192 MB x 1)  
12288 MB Total System Memory (8192 MB x1 + 4096 MB x 1)  
16384 MB Total System Memory (8192 MB x 2)

### Maximum

Up to 16 GB

### DDR3L(Intel® Core™ i3-5005U processor only)

DDR3L – 1600 (Transfer rates up to 1600 MT/s)

Dual channel support

Non customer accessible / upgradeable

### Configuration

2048 MB Total System Memory (2048 MB x 1)  
4096 MB Total System Memory (2048 MB x 2) (HP 250 G5 only)  
4096 MB Total System Memory (4096 MB x 1)  
6144 MB Total System Memory (2048 MB x 1 + 4096 MB x 1)  
8192 MB Total System Memory (4096 MB x 2)  
8192 MB Total System Memory (8192 MB x 1)  
12288 MB Total System Memory (8192 MB x1 +4096 MB x1) (HP 250 G5 only)  
16384 MB Total System Memory (8192 MB x 2)

### Maximum

Up to 16 GB

### DDR3L(Intel® Pentium® N3710, Celeron® N3010 only)

DDR3L – 1600 (Transfer rates up to 1600 MT/s)

Single channel support

Non customer accessible / upgradeable

### Configuration

2048 MB Total System Memory (2048 MB x 1)  
4096 MB Total System Memory (4096 MB x 1)  
8192 MB Total System Memory (8192 MB x 1)

### Maximum

Up to 8 GB

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

## NETWORKING/COMMUNICATIONS



## Features

### Wireless LAN (WLAN)<sup>1</sup>

Intel® Dual Band Wireless-AC 3165 802.11 ac (1x1) WiFi + Bluetooth® 4.2 Combo  
Realtek 802.11b/g/n (1x1) Wi-Fi + Bluetooth® 4.0 Combo  
Broadcom 802.11 b/g/n (1x1) Wi-Fi + Bluetooth® 4.0 Combo  
Realtek 802.11b/g/n (1x1) Wi-Fi

### Support for Miracast<sup>2</sup>

Windows 10  
Compatible with Miracast-certified devices

1. Wireless access point and Internet service is required and is not included. Availability of public wireless access points limited.
2. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>

### Communications<sup>1</sup>

Integrated 10/100/1000 Ethernet  
Integrated 10/100 Ethernet (HP 240 G5 only)

1. The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

## AUDIO/MULTIMEDIA

### Audio

HD Audio with DTS Studio Sound™  
(2) Integrated stereo speakers

### Camera

HP TrueVision HD<sup>1</sup>

- Indicator LED
- USB 2.0
- BSI sensor
- f2.0
- 1280 x 720p by 30 frames per second
- Single digital microphone
- Enable HP Noise Cancellation

1. HD content required to view HD images.

### Webcam

HP Webcam<sup>1</sup>

- Indicator LED
- USB 2.0
- 640 x 480 by 24 frames per second
- Single digital microphone
- Enable HP Noise Cancellation



## Features

1. Wireless access point and Internet service is required and is not included. Availability of public wireless access points limited.

## KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

### Keyboard

#### HP 240 G5

Full size textured island-style keyboard without numeric keypad

Black

#### HP 250 G5

Full size textured island-style keyboard with numeric keypad

Black

### Touchpad

Multitouch gestures enabled

Support Modern Trackpad Gestures

Taps enabled as default

## SOFTWARE AND SECURITY

### Preinstalled Software with Windows Operating System

Buy Office

Intel® Wireless Display<sup>1</sup>

Windows 10 Recovery Manager Installer - CPS

Windows 10 Push Button Reset Recovery – CPS

HP Support Assistant

HP PC Hardware Diagnostics UEFI

HP Communication Recovery Tool

HP ePrint<sup>2</sup>

HP e-Service

HP CoolSense

HP System Event Utility

CyberLink Power Media Player

CyberLink PowerDirector

Adobe® Shockwave® Player

1. Integrated Intel Wi-Di feature is available on select configurations only and requires separately purchased projector, TV or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, TV or computer monitor via a standard HDMI cable, also sold separately.
2. Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see [www.hp.com/go/eprintcenter](http://www.hp.com/go/eprintcenter)). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

### Security

FW TPM 2.0 (UMA only)

Security lock slot (Cable not included)



## Features

### POWER

#### Power Supply

HP 45W Smart AC Adapter

HP 65W Smart AC Adapter

HP 65W Smart EM Adapter (China and India only)

Power cord included is 3.28 feet (1 m) in length

#### Primary Battery

HP 3-cell 31 WHr (UMA only)

HP 4-cell 41Whr

#### Battery Life

##### 240 G5

	4 cell battery/MM14	3 cell battery/MM14
Intel i5-6200U/ i3-6100U – UMA	9 hours	6 hours 30 minutes
Intel i3-5005U - UMA	9 hours	6 hours 30 minutes
Intel Celeron N3060 – UMA	9 hours	6 hours 30 minutes

##### 250 G5

	4 cell battery/MM14	3 cell battery/MM14
Intel i7-6500U/ i5-6200U – DSC	8 hours 30 minutes	N/A
Intel i7-6500U/ i5-6200U – UMA	8 hours 15 minutes	6 hours 15 minutes
Intel i3-5005U – DSC	8 hours 15 minutes	N/A
Intel i3-5005U - UMA	8 hours 15 minutes	6 hours
Intel Pentium N3710/ Celeron N3060 – UMA	9 hours 15 minutes	7 hours

#### System Standby Time

TBD

## WEIGHTS & DIMENSIONS

### HP 240 G5

#### Weight

Starting at 3.95 lbs (1.79 kg)<sup>1</sup>

(3-cell battery, Solid State Drive)

#### Dimensions (w x d x h)

13.60 x 9.50 x .94 in

34.54 x 24.15 x 2.39 cm



## Features

### HP 250 G5

#### Weight

Starting at 4.32 lbs (1.96 kg)<sup>1</sup>  
(3-cell battery, Solid State Drive)

#### Dimensions (w x d x h)

15.13 x 10.02 x .96 in  
38.43 x 25.46 x 2.43 cm

1. Weight varies by configuration and components.

## PORTS/SLOTS

### Ports

USB 2.0 ports – Two (One left and one right)

USB 3.0 port – One (Left)

VGA port – One

HDMI v1.4b – One

Headphone / microphone combo jack – One

RJ-45 / Ethernet - One

AC Smart adapter port – One

### HP Multi-Format Digital Media Card Reader

Supports SD, SDHC, SDXC

## SERVICE AND SUPPORT

HP Services offers 3-year and 1-year limited warranty options and 90 days software support depending on country. Batteries have a default one year limited warranty except for Long Life batteries which will have same 1-year or 3-year limited warranty as the platform. On-site service and extended coverage is also available. HP Care Pack Services<sup>1,2</sup> are optional extended service contracts that go beyond the standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/cpc>

1. Sold separately or as an optional feature.

2. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. Consult the HP Customer Support Center for details.

<http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>



## Technical Specifications

### DISPLAYS\*

<b>14.0" diagonal WLED HD Anti-glare Slim (1366 x 768), SVA</b>	<b>Outline Dimensions</b> (W x H x D)	320.9x205.6x3.0		
	<b>Active Area</b>	309.4 x 173.95		
	<b>Weight</b>	290g		
	<b>Diagonal Size</b>	14.0"		
	<b>Surface Treatment</b>	AG		
	<b>Contrast Ratio</b>	300:1		
	<b>Refresh Rate</b>	60Hz		
	<b>Brightness</b>	220 nit		
	<b>Pixel Resolution</b>	<b>Format</b>	1366 x 768	
		<b>Configuration</b>		
	<b>Interface</b>	eDP 1.2		
	<b>LCD Mode</b>	TN		
	<b>PPI</b>	112		
	<b>Viewing Angle</b>	40/40/15/30		
<b>15.6" diagonal WLED HD Anti-glare Slim (1366 x 768) SVA</b>	<b>Outline Dimensions</b> (W x H x D)	360.0 x 224.3 x 3.2mm		
	<b>Active Area</b>	344.2 x 193.5		
	<b>Weight</b>	370g		
	<b>Diagonal Size</b>	15.6"		
	<b>Surface Treatment</b>	AG		
	<b>Contrast Ratio</b>	300:1		
	<b>Refresh Rate</b>	60Hz		
	<b>Brightness</b>	220 nit		
	<b>Pixel Resolution</b>	<b>Format</b>	<b>Pixel Resolution</b>	
		<b>Configuration</b>		
	<b>Interface</b>	eDP 1.2		
	<b>LCD Mode</b>	TN		
	<b>PPI</b>	101		
	<b>Viewing Angle</b>	40/40/15/30		

<b>15.6" diagonal WLED FHD Anti-glare Slim (1920 x 768) SVA</b>	<b>Outline Dimensions</b> (W x H x D)	360.0 x 224.3 x 3.2mm	





## Technical Specifications

<b>1080) SVA</b>	<b>Active Area</b>	344.16 x 193.59		
	<b>Weight</b>	370g		
	<b>Diagonal Size</b>	15.6"		
	<b>Surface Treatment</b>	AG		
	<b>Contrast Ratio</b>	300:1		
	<b>Refresh Rate</b>	60Hz		
	<b>Brightness</b>	220 nit		
	<b>Pixel Resolution</b>	<b>Format</b>	<b>Pixel Resolution</b>	
		<b>Configuration</b>		
		<b>Interface</b>	eDP 1.2	
	<b>Outline Dimensions</b> (W x H x D)	360.0 x 224.3 x 3.2mm		
	<b>Active Area</b>	344.16 x 193.59		
	<b>Weight</b>	370g		

\* All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

## STORAGE AND DRIVES

<b>500 GB 5400 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	95g		
	<b>Capacity</b>	500GB		
	<b>Height</b>	7mm		
	<b>Width</b>	69.65mm		
	<b>Interface</b>	ATA-8, SATA 3.0		
	<b>Transfer Rate</b>	<b>Synchronous (maximum)</b>	600MB/s	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	2ms	
		<b>Average</b>	12ms	
		<b>Maximum</b>	22ms	
	<b>Rotational Speed</b>	5400rpm		
<b>Logical Blocks</b>	976,773,168			
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [top cover temp]			
<b>Features</b>	S.M.A.R.T., NCQ, Ultra DMA			

<b>500 GB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	95g
	<b>Capacity</b>	500GB
	<b>Height</b>	7mm



## Technical Specifications

<b>Width</b>	69.85mm
<b>Interface</b>	ATA-8, SATA 3.0
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 600MB/s
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b> 2ms
	<b>Average</b> 12ms
	<b>Maximum</b> 22ms
<b>Rotational Speed</b>	7200rpm
<b>Logical Blocks</b>	976,773, 168
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [top cover temp]
<b>Features</b>	S.M.A.R.T., NCQ, Ultra DMA

### 1 TB 5400 rpm SATA Hard Drive

<b>Drive Weight</b>	115g
<b>Capacity</b>	1TB
<b>Height</b>	9.5mm
<b>Width</b>	69.85mm
<b>Interface</b>	ATA-8, SATA 3.0
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 600MB/s
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b> 2ms
	<b>Average</b> 12ms
	<b>Maximum</b> 22ms
<b>Rotational Speed</b>	5400rpm
<b>Logical Blocks</b>	1,953,525,168
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [top cover temp]
<b>Features</b>	S.M.A.R.T., NCQ, Ultra DMA

## NETWORKING/COMMUNICATIONS\*\*

### Intel® Dual Band Wireless-AC 3165 802.11 ac (1x1) WiFi + Bluetooth® 4.2 Combo

<b>Wireless LAN Standards</b>	IEEE 802.11a
	IEEE 802.11b
	IEEE 802.11g
	IEEE 802.11n
	IEEE 802.11ac
<b>Interoperability</b>	Wi-Fi certified
	<b>Frequency Band</b>
	802.11b/g/n

- 2.402 – 2.482 GHz

**Note:**

The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel



### Technical Specifications

12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

#### 802.11a/n

- 4.9 – 4.95 GHz (Japan)
- 5.15 – 5.25 GHz
- 5.25 – 5.35 GHz
- 5.47 – 5.725 GHz
- 5.825 – 5.850 GHz

#### Note:

Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)

#### Data Rates

- 802.11b: 1, 2, 5.5, 11 Mbps
- 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)
- 802.11ac : MCS0 ~ MCS7, (1SS) (20MHz, 40MHz, and 80MHz)

#### Modulation

Direct Sequence Spread Spectrum

BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM

#### Security<sup>1</sup>

- IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only
- AES-CCMP: 128 bit in hardware
- 802.1x authentication
- WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.
- WPA2 certification
- IEEE 802.11i
- Cisco Certified Extensions, all versions through CCX4 and CCX Lite
- WAPI

#### Network Architecture Models

Ad-hoc (Peer to Peer)

Infrastructure (Access Point Required)

#### Roaming

IEEE 802.11 compliant roaming between access points

#### Output Power<sup>2</sup>

- 802.11b : +16dBm minimum
- 802.11g : +14dBm minimum
- 802.11a : +14dBm minimum
- 802.11n HT20(2.4GHz) : +14dBm minimum
- 802.11n HT40(2.4GHz) : +12dBm minimum
- 802.11n HT20(5GHz) : +14dBm minimum
- 802.11n HT40(5GHz) : +12dBm minimum
- 802.11ac 80MHz(5GHz) : +11dBm minimum

#### Power Consumption

Transmit: 2.0 W (max)

Receive: 1.6 W (max)

Idle mode (PSP): 180 mW (WLAN Associated)

Idle mode: 50 mW (WLAN unassociated)

Connect Standby: 10 mW (WLAN+BT)

Radio disabled: 5 mW

#### Power Management

ACPI and PCI Express compliant power management



## Technical Specifications

<b>Receiver Sensitivity<sup>3</sup></b>	802.11 compliant power saving mode 802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -88dBm maximum 802.11a, 54Mbps : -74dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

### HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

<b>Bluetooth Specification</b>	4.0/4.1/4.2 Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
<b>Data Rates and Throughput</b>	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels



### Technical Specifications

<b>Transmit Power</b>	Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5) The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.												
<b>Receiver Sensitivity Legacy</b>	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td><math>\pi/4</math>-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER											
GFSK	-80 dBm	-70 dBm											
$\pi/4$ -DQPSK	-80 dBm	-70 dBm											
8DPSK	-80 dBm	-70 dBm											
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW												
<b>Range</b>	Legacy Up to 33 ft (10 m) BLE Up to 99 ft (30 m)												
<b>Electrical Interface Bluetooth Software Supported Link Topology</b>	USB 2.0 compliant Microsoft Windows Bluetooth Software												
<b>Electrical Interface Bluetooth Software Supported Security</b>	Point to Point, Multipoint Pico Nets up to 7 slaves Full support of Bluetooth Security Provisions												
<b>Power Management Certifications</b>	Microsoft Windows ACPI, and USB Bus Support Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff												
<b>Security Certifications Bluetooth Profiles Supported</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249												
<b>Power Management Certifications</b>	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark Serial Port Profile (SPP) <sup>1</sup> Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) <sup>1,2</sup> Generic Object Exchange Profile (GOEP) <sup>1,2</sup> Object Push Profile (OPP) <sup>1,2</sup> Hard Copy Cable Replacement (HCRP) <sup>1,2</sup> Personal Area Networking Profile (PAN) <sup>1,2</sup> Human Interface Device Profile (HID) <sup>1,2</sup> Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Audio Video Remote Control Profile (AVRCP)												
<b>Certifications Bluetooth Profiles Supported</b>													
<b>Bluetooth V4.1/V4.2 support feature</b>	V4.1: ESR5/6/7 compliant												



## Technical Specifications

V4.2: ESR8 compliant, LE Secure Connection – Basic.

### Realtek 802.11b/g/n (1x1) Wi-Fi + Bluetooth® 4.0 Combo

<b>Wireless LAN Standards</b>	IEEE 802.11b IEEE 802.11g IEEE 802.11n
<b>Interoperability</b>	Wi-Fi certified
<b>Frequency Band</b>	802.11b/g/n <ul style="list-style-type: none"> <li>• 2.402 – 2.482 GHz</li> </ul> <p>Note: The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p>
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
<b>Modulation</b>	Direct Sequence Spread Spectrum
<b>Security<sup>1</sup></b>	BPSK, QPSK, CCK, 16-QAM, 64-QAM, <ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul>
<b>Network Architecture</b>	Ad-hoc (Peer to Peer)
<b>Models</b>	Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• 802.11b : +16dBm minimum</li> <li>• 802.11g : +14dBm minimum</li> <li>• 802.11n HT20(2.4GHz) : +13dBm minimum</li> <li>• 802.11n HT40(2.4GHz) : +13dBm minimum</li> <li>• 802.11n HT20(5GHz) : +12dBm minimum</li> <li>• 802.11n HT40(5GHz) : +12dBm minimum</li> </ul>
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode



## Technical Specifications

<b>Receiver Sensitivity<sup>3</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded antennas for 2.4GHz are provided to the card to support WLAN and Bluetooth communications. (Support Dual antenna or Single antenna, depend on platform requirement)
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON
	<ol style="list-style-type: none"> <li>4. <a href="#">Check latest software/driver release for updates on supported security features.</a></li> <li>5. <a href="#">Maximum output power may vary by country according to local regulations.</a></li> <li>6. <a href="#">Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</a></li> </ol>

### HP Integrated Module with Bluetooth 4.0/4.1 Wireless Technology

<b>Bluetooth Specification</b>	4.0/4.1 Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
<b>Data Rates and Throughput</b>	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)



## Technical Specifications

**Transmit Power**

The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.

**Receiver Sensitivity Legacy**

Modulation	0.01% BER	0.001% BER
GFSK	-80 dBm	-70 dBm
$\pi/4$ -DQPSK	-80 dBm	-70 dBm
8DPSK	-80 dBm	-70 dBm

**Power Consumption**

Peak (Tx) 330 mW  
Peak (Rx) 230 mW  
Selective Suspend 17 mW

**Range**

Legacy Up to 33 ft (10 m)  
BLE Up to 99 ft (30 m)

**Electrical Interface**

USB 2.0 compliant

**Bluetooth Software Supported Link Topology**

Microsoft Windows Bluetooth Software

**Electrical Interface**

Point to Point, Multipoint Pico Nets up to 7 slaves

**Bluetooth Software Supported Security**

Full support of Bluetooth Security Provisions

**Power Management Certifications**

Microsoft Windows ACPI, and USB Bus Support  
Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

**Security**

All necessary regulatory approvals for supported countries, including:

**Certifications**

FCC (47 CFR) Part 15C, Section 15.247 & 15.249

**Bluetooth Profiles Supported**

**Power Management Certifications**

ETS 300 328, ETS 300 826  
Low Voltage Directive IEC950  
UL, CSA, and CE Mark  
Serial Port Profile (SPP)<sup>1</sup>  
Service Discovery Application Profile (SDAP)  
Dial-Up Networking (DUN)<sup>1,2</sup>  
Generic Object Exchange Profile (GOEP)<sup>1,2</sup>  
Object Push Profile (OPP)<sup>1,2</sup>  
Hard Copy Cable Replacement (HCRP)<sup>1,2</sup>  
Personal Area Networking Profile (PAN)<sup>1,2</sup>  
Human Interface Device Profile (HID)<sup>1,2</sup>  
Hands Free Profile (HFP)  
Advanced Audio Distribution Profile (A2DP)  
Audio Video Remote Control Profile (AVRCP)

**Certifications**

**Bluetooth Profiles Supported**

**Bluetooth V4.1 support feature**

Slave Connectionless Broadcast





## Technical Specifications

### Broadcom 802.11 b/g/n (1x1) Wi-Fi + Bluetooth® 4.0 Combo

<b>Wireless LAN Standards</b>	IEEE 802.11b IEEE 802.11g  IEEE 802.11n
<b>Interoperability</b>	Wi-Fi certified
<b>Frequency Band</b>	802.11b/g/n <ul style="list-style-type: none"><li>2.402 – 2.482 GHz</li></ul> <p>Note: The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p>
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"><li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li><li>AES-CCMP: 128 bit in hardware</li><li>802.1x authentication</li><li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li><li>WPA2 certification</li><li>IEEE 802.11i</li><li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li><li>WAPI</li></ul>
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"><li>802.11b : +16dBm minimum</li><li>802.11g : +14dBm minimum</li><li>802.11n HT20(2.4GHz) : +13dBm minimum</li><li>802.11n HT40(2.4GHz) : +13dBm minimum</li><li>802.11n HT20(5GHz) : +12dBm minimum</li></ul>



### Technical Specifications

- 802.11n HT40(5GHz) : +12dBm minimum

#### Power Consumption

Transmit: 2.0 W (max)  
Receive: 1.6 W (max)  
Idle mode (PSP): 180 mW (WLAN Associated)  
Idle mode: 60 mW (WLAN unassociated)  
  
Radio disabled: 30 mW

#### Power Management

ACPI and PCI Express compliant power management  
802.11 compliant power saving mode

#### Receiver Sensitivity<sup>3</sup>

802.11b, 1Mbps : -94dBm maximum  
  
802.11b, 11Mbps : -86dBm maximum  
  
802.11g, 6Mbps : -88dBm maximum  
  
802.11g, 54Mbps : -74dBm maximum  
  
802.11n, MCS07 : -69dBm maximum  
  
802.11n, MCS15 : -66dBm maximum

#### Antenna type

High efficiency antenna with spatial diversity, mounted in the display enclosure

Two embedded antennas for 2.4GHz are provided to the card to support WLAN and Bluetooth communications.  
(Support Dual antenna or Single antenna, depend on platform requirement)

#### Form Factor

PCI-Express M.2 MiniCard

#### Dimensions

Type 2230 : 2.3 x 22.0 x 30.0 mm

Or

Type 1630 : 2.3 x 16.0 x 30.0 mm

#### Weight

Type 2230 : 2.8g

Or

Type 1630 : 2g

#### Operating Voltage

3.3v +/- 9%

#### Temperature

Operating 14° to 158° F (-10° to 70° C)



## Technical Specifications

	Non-operating	-40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
<b>Altitude</b>	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Amber – Radio OFF; LED White – Radio ON	

7. Check latest software/driver release for updates on supported security features.
8. Maximum output power may vary by country according to local regulations.
9. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

### HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology

<b>Bluetooth Specification</b>	4.0+EDR Compliant													
<b>Frequency Band</b>	2402 to 2480 MHz													
<b>Number of Available Channels</b>	79 (1 MHz) available channels													
<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps													
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels													
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric													
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR.													
<b>Receiver Sensitivity</b>	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td><math>\pi/4</math>-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>		Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER												
GFSK	-80 dBm	-70 dBm												
$\pi/4$ -DQPSK	-80 dBm	-70 dBm												
8DPSK	-80 dBm	-70 dBm												
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW													
<b>Range</b>	Up to 33 ft (10 m)													



## Technical Specifications

<b>Electrical Interface</b>	USB 2.0 compliant
<b>Bluetooth Software Supported</b>	Microsoft Windows Bluetooth Software
<b>Link Topology</b>	
<b>Electrical Interface</b>	Point to Point, Multipoint Pico Nets up to 7 slaves
<b>Bluetooth Software Supported</b>	Full support of Bluetooth Security Provisions
<b>Security</b>	
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support
<b>Power Management</b>	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
<b>Certifications</b>	
<b>Security</b>	All necessary regulatory approvals for supported countries, including:
<b>Certifications</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
<b>Bluetooth Profiles Supported</b>	
<b>Power Management</b>	ETS 300 328, ETS 300 826
<b>Certifications</b>	Low Voltage Directive IEC950
	UL, CSA, and CE Mark
	Serial Port Profile (SPP) <sup>1</sup>
	Service Discovery Application Profile (SDAP)
	Dial-Up Networking (DUN) <sup>1,2</sup>
	Generic Object Exchange Profile (GOEP) <sup>1,2</sup>
<b>Certifications</b>	Object Push Profile (OPP) <sup>1,2</sup>
	File Transfer Profile (FTP)
<b>Bluetooth Profiles Supported</b>	Synchronization Profile (SYNC)
	Hard Copy Cable Replacement (HCRP) <sup>1,2</sup>
	Personal Area Networking Profile (PAN) <sup>1,2</sup>
	Human Interface Device Profile (HID) <sup>1,2</sup>
	FAX Profile (FAX)
	Basic Imaging Profile (BIP) <sup>2</sup>
	Headset Profile (HSP)
	Hands Free Profile (HFP)
	Advanced Audio Distribution Profile (A2DP)

### Realtek 802.11b/g/n (1x1) Wi-Fi

**Wireless LAN Standards** IEEE 802.11b



### Technical Specifications

	IEEE 802.11g IEEE 802.11n
<b>Interoperability</b>	Wi-Fi certified
<b>Frequency Band</b>	802.11b/g/n <ul style="list-style-type: none"><li>2.402 – 2.482 GHz</li></ul> <p>Note: The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p>
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"><li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li><li>AES-CCMP: 128 bit in hardware</li><li>802.1x authentication</li><li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li><li>WPA2 certification</li><li>IEEE 802.11i</li><li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li><li>WAPI</li></ul>
<b>Network Architecture</b>	Ad-hoc (Peer to Peer)
<b>Models</b>	Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"><li>802.11b : +16dBm minimum</li><li>802.11g : +14dBm minimum</li><li>802.11a : +14dBm minimum</li><li>802.11n HT20(2.4GHz) : +13dBm minimum</li><li>802.11n HT40(2.4GHz) : +13dBm minimum</li><li>802.11n HT20(5GHz) : +12dBm minimum</li><li>802.11n HT40(5GHz) : +12dBm minimum</li></ul>
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>3</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum



## Technical Specifications

	802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded 2.4 GHz antennas are provided to the card to support WLAN and Bluetooth communications (Support Dual antenna or Single antenna, depend on platform requirement)
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating Non-operating
<b>Humidity</b>	Operating Non-operating
<b>Altitude</b>	Operating Non-operating
	LED Amber – Radio OFF; LED White – Radio ON

\*\* Wireless access point and internet service required. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

## POWER

<b>HP 4-cell 41Whr</b>	<b>Dimensions (H x W x L)</b>	20.8mm*38.82mm*274mm
	<b>Weight</b>	225g
	<b>Cells/Type</b>	Cylindrical cell 2.8Ah with SDI, LGC , SAN
	<b>Voltage</b>	SDI, SAN: 14.8V; LGC :14.6V
	<b>Amp-hour capacity</b>	SDI,SAN: 2620mAh, LGC :2670mAh
	<b>Watt-hour capacity</b>	SDI,SAN:38.8WH LGC:38.9WH



### Technical Specifications

<b>Temperature</b>	<b>Operating (Charging)</b>	0~45°C
	<b>Operating (Discharging)</b>	-10~60°C
<b>Battery Re-Charge Time</b>	<b>Non-operating System in OFF or Standby Mode</b>	0~45°C
<b>Fuel Gauge LED</b>		No
<b>Warranty</b>		
<b>Optional Travel Battery Available</b>		No

### ENVIRONMENTAL HP 240 G5 Notebook PC

**Eco-Label Certifications & declarations** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT < Gold > registered in the United States. See <http://www.epeat.net> for registration status in your country.

**System Configuration** The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a “Typically Configured Notebook”.

#### Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	7.78 W	7.66 W	8.88 W
Normal Operation (Long idle)	5.63 W	6.38 W	5.72 W
Sleep	0.55 W	0.63 W	0.56 W
Off	0.32 W	0.37 W	0.29 W

**Note:**

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

#### Heat Dissipation\*

115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
--------------	--------------	--------------



### Technical Specifications

Normal Operation (Short idle)	27 BTU/hr	26 BTU/hr	30 BTU/hr
Normal Operation (Long idle)	19 BTU/hr	22 BTU/hr	20 BTU/hr
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr

\*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

Sound Power (L<sub>WAd</sub>, bels)

Sound Pressure (L<sub>pAm</sub>, decibels)

Typically Configured – Idle  
Fixed Disk – Random writes

2.6

19

2.7

20

### Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port
- Optional expansion base docking station
- Interchangeable HDD

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

Mercury greater than 1ppm by weight

Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium





## Technical Specifications

### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the < gold > level, see [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0% post-consumer recycled plastic (by wt.)
- This product is 95.5% recycle-able when properly disposed of at end of life.

### Packaging Materials

<b>External:</b>	PAPER/Corrugated	325 g
<b>Internal:</b>	PLASTIC/Polyethylene low density	22 g
	PLASTIC/EPE-Expanded Polyethylene	100 g

The plastic packaging material contains at least 50% recycled content.

The corrugated paper packaging materials contains at least 70% recycled content.

### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBEBs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)



### Technical Specifications

#### Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

[http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC\\_GBU\\_Product\\_Design\\_ISO\\_14K\\_Certificate.pdf](http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf)

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

### HP 250 G5 Notebook PC

#### Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT <Silver> registered in the United States. See <http://www.epeat.net> for registration status in your country.

#### System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".

#### Energy Consumption (in accordance with US

115VAC, 60Hz

230VAC, 50Hz

100VAC, 60Hz



### Technical Specifications

#### ENERGY STAR®

##### test method)

Normal Operation (Short idle)	9.36 W	9.36 W	8.02 W
Normal Operation (Long idle)	5.29 W	5.00 W	5.64 W
Sleep	1.08 W	1.19 W	1.07 W
Off	0.31 W	0.41 W	0.30 W

#### Note:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	32 BTU/hr	32 BTU/hr	27 BTU/hr
Normal Operation (Long idle)	18 BTU/hr	17 BTU/hr	19 BTU/hr
Sleep	4 BTU/hr	4 BTU/hr	4 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr

\*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (L <sub>WAd</sub> , bels)	Sound Pressure (L <sub>pAm</sub> , decibels)
Typically Configured – Idle	3.2	25
Fixed Disk – Random writes	3.3	27

#### Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port
- 2 SODIMM memory slots
- Optional expansion base docking station



## Technical Specifications

- Interchangeable HDD

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 1ppm by weight
- Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <Silver> level, see [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0% post-consumer recycled plastic (by wt.)
- This product is 95.6% recycle-able when properly disposed of at end of life.

### Packaging Materials

<b>External:</b>	PAPER/Corrugated	360.8 g
<b>Internal:</b>	PLASTIC/Polyethylene low density	10.6 g
	PLASTIC/EPE-Expanded Polyethylene	135 g

The plastic packaging material contains at least 80.9% recycled content.

The corrugated paper packaging materials contains at least 75.8% recycled content.

### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)



### Technical Specifications

- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

### Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

[http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC\\_GBU\\_Product\\_Design\\_ISO\\_14K\\_Certificate.pdf](http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf)

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

### COUNTRY OF ORIGIN

China



Options and Accessories (Sold separately and availability may vary by country.)

Type	Description	PartNumber
<b>Cases</b>	HP Essential Top Load Case (up to 15.6")	H2W17AA#xxx
	HP Essential Backpack (up to 15.6")	H1D24AA
	HP Essential Messenger Case (up to 17.3")	H1D25AA
<b>Docking Accessories</b>	HP Universal Port Replicator	E6D70AA#xxx
	HP 3001pr USB 3 Port Replicator	F3S42AA
<b>Input/Output</b>	HP Comfort Grip Wireless Mouse	H2L63AA
	HP USB Essential Keyboard/Mouse	H6L29AA
	HP Slim USB Keyboard and Mouse	T6T83AA
<b>Input-Audio</b>	HP Stereo USB Headset	T1A67AA
<b>UCC</b>	HP Conferencing Keyboard	K8P74AA#xxx
	HP Speaker Phone	K7V16AA
	HP Wired Headset	K7V17AA
<b>Adapters</b>	HP 45W Smart AC Adapter (4.5mm)	H6Y88AA#xxx
	HP 65W Smart AC Adapter (4.5mm)	H6Y89AA#xxx
	HP 65W Slim AC Adapter	H6Y82AA#xxx
	HP 7.4mm to 4.5mm DC Dongle	K0Q39AA
<b>Power Bank</b>	HP Notebook Power Bank	N9F71AA#xxx
<b>Security</b>	HP Essential Combination Lock	T0Y16AA
<b>Display</b>	HP ProDisplay P240va	N3H14A
	HP V272	M4B78A



## Summary of Changes

<b>Date of change:</b>	<b>Version History:</b>		<b>Description of change:</b>
February 22, 2016	Version 1 to 2	Changed	Several edits throughout the document
March 30, 2016	Version 2 to 3	Removed	Removed TLC from 256 GB SATA-3
April 25, 2016	Version 3 to 4	Added	Battery life for 250
July 25, 2016	Version 4 to 5	Added	Environmental info
August 12, 2016	Version 5 to 6	Added	New processors 240 G5 Intel® Core™ i5-7200U with Intel® HD Graphics 620 Intel® Core™ i3-7100U with Intel® HD Graphics 620 250 G5 Intel® Core™ i7-7500U with Intel® HD Graphics 620 Intel® Core™ i5-7200U with Intel® HD Graphics 620 Intel® Core™ i3-7100U with Intel® HD Graphics 620 Intel® Pentium® N4200 with Intel® HD Graphics 505 Intel® Celeron® N3350 with Intel® HD Graphics 550
November 23, 2016	Version 6 to 7	Updated	Updated the references of DVD under Optical Drives section.
December 12, 2016	Version 7 to 8	Update	Optical Drives disclaimer updated
January 5, 2017	Version 8 to 9	Update	Optical Drives section updated
January 17, 2017	Version 9 to 10	Update	Processors and Graphics sections updated
March 13, 2017	Version 10 to 11	Update	Updated Note in Processor sections
March 21, 2017	Version 11 to 12	Update	Features Section updated (Processor removed)
April 3, 2017	Version 12 to 13	Added	Processors family added
July 20, 2017	Version 13 to 14	Update	1 multi bay II storage port removed

Copyright © 2017 HP Development Company, L.P. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Radeon and Athlon are registered trademarks or trademarks of AMD Corporation in the U.S. and/or other countries. Bluetooth is a trademark owned by its proprietor and used by HP Inc. under license. Microsoft and Windows are either trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS Studio Sound is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved.

