Overview

HP ProBook x360 11 G1 EE Notebook PC




Front Right

- 1. WLAN antennas (2)
- 2. Internal microphones (2)
- 3. User-facing webcam LED
- 4. User-facing 720p webcam
- 5. Power connector
- 6. Ethernet (RJ-45) port
- HDMI v1.4b

- 8. USB 3.1 Gen 1 port
- 9. USB Type-C™ (Data only)
- 10. Micro SD card reader
- 11. ClickPad
- 12. World-facing 1080p webcam (select models only)
- 13. World-facing webcam LED (select models only)



Overview

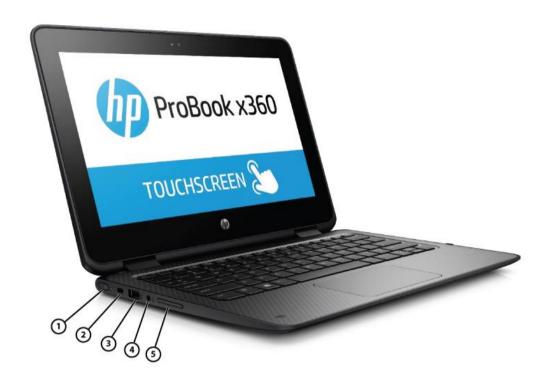

Front Left


- 1. Power button
- 2. Security lock slot
- 3. USB 3.1 Gen 1 Port

- 4. Headphone / Microphone Combo Jack
- 5. Volume button



Overview

Stand Mode

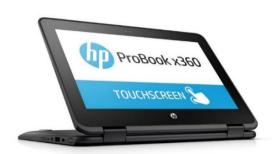

Tablet Mode



Tent Mode





Overview

AT A GLANCE

- Starting at 2.98 lbs (1.35 kg) non-touch and 3.19 lbs (1.45 kg) touch
- Less than 20 mm (0.79"), this flexible 360° hinge converts to laptop, tablet, tent, or stand mode easily
- Passed MIL-STD 810G testing¹ with rugged features such as co-molded rubber trim, spill- and pick-resistant keyboard, and Corning® Gorilla® Glass 4 touch screen
- Optional dual camera system for project-based learning
- Optional HP Active Pen provides an authentic digital inking experience
- Pre-installed with Windows 10 Pro 64, Windows 10 Pro 64 (National Academic), Windows 10 Home 64, or Windows 10 S
- Powered by Intel® Celeron® N3350, Intel® Celeron® N3450 and Intel® Pentium® N4200 processors
- Choice of 29.4 cm (11.6") diagonal HD SVA anti-glare slim LED non-touch (1366 x 768) or 29.4 cm (11.6") diagonal HD SVA slim LED touch screen (1366 x 768) displays
- 64 GB eMMC or up to 256GB SATA-3 Solid State Drive storage options
- Up to 4 GB system memory for enhanced memory management
- Reliable connectivity with Intel® Dual Band Wireless-AC 7265 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo WLAN for learning and collaboration beyond the classroom
- Built-in ports include: Ethernet (RJ-45), USB 3.1 Gen 1, USB Type-C™, and HDMI 1.4b port for connecting to high-resolution displays
- Enhanced security TPM 2.0 discrete chip
- Battery life up to 11 hours

1. MIL STD 810G testing is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Damage under the MIL STD test conditions or any accidental damage requires an optional HP Accidental Damage Protection Care Pack.

NOTE: See important legal disclosures for all listed specs in their respective features sections.



Features

PRODUCT NAME

HP ProBook x360 11 G1 EE Notebook PC

OPERATING SYSTEM

Preinstalled Windows 10 Pro 64¹

Windows 10 Home 641

Windows 10 Pro (National Academic License)²

Windows 10 Pro in S mode 64³

Web supported Windows 10 Enterprise 64¹

Note: In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows® 8 or Windows 7 drivers on http://www.support.hp.com.

- Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately
 purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is
 automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for
 updates. See http://www.windows.com.
- 2. Some devices for academic use will automatically be updated to Windows 10 Pro Education with the Windows 10 Anniversary Update. Features vary; see https://aka.ms/ProEducation for Windows 10 Pro Education feature information
- 3. Windows 10 Pro in S mode 64 works exclusively with apps from the Windows store. Some accessories and apps compatible with Windows 10 may not work, and performance may vary. Certain default settings, features, and apps cannot be changed. Easily switch to Windows 10 Pro configuration (fee applies) Learn more at Microsoft.com/Windows 10S.

PROCESSORS

Intel® Celeron® N3350 with Intel® HD Graphics 500 (1.1 GHz, up to 2.4 GHz,2 MB cache, 2 cores)^{1,2} Intel® Pentium® N4200 with Intel® HD Graphics 505 (1.1 GHz, up to 2.5 GHz, 2 MB cache, 4 cores)^{1,2} Intel® Celeron® N3450 with Intel® HD Graphics 500 (1.1 GHz, up to 2.2 GHz, 2 MB cache, 4 cores)¹

Processors Family

7th Generation Intel® Celeron® processor (N3350 model) 7th Generation Intel® Pentium® processor (N4200 model)

Note: In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows® 8 or Windows 7 drivers on http://www.support.hp.com.

Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

1. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering is not a measurement of higher performance.



Features

2. In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel® and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on http://www.support.hp.com

CHIPSET

Chipset is integrated with processor

GRAPHICS

Integrated

Intel® HD¹ Graphics 500 Intel® HD¹ Graphics 505

1. HD content required to view HD images. **NOTE:** View processor section for details.

DISPLAY

Interna

29.4 cm (11.6") diagonal HD SVA anti-glare slim LED non-touch with user-facing camera (1366 x 768)¹ 29.4 cm (11.6") diagonal HD SVA slim LED touch screen with user-facing camera (1366 x 768)¹

External

Up to 32-bit per pixel color depth

HDM12

HDMI v1.4b supporting: up to 3840 x 2160 @ 30 Hz

- 1. HD content required to view HD images.
- 2. HDMI cable sold separately.

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage¹
M.2 (NGFF) 2280 Solid State Drive
128 GB SATA-3 Value Solid State Drive²
128 GB SATA-3 SS TLC Solid State Drive²
256 GB SATA-3 Value Solid State Drive²



Features

256 GB SATA-3 SS TLC Solid State Drive²

eMMC Configurations

64 GB³

257 For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10) is reserved for system recovery software.

258 Not available with eMMC storage.

259 No HPRM.

MEMORY

Standard

DDR3L-1600 (Transfer rates up to 1600 MT/s)
Supports up to 4 GB max on-board (Not Customer Accessible)

Configurations

2 GB (256 MB x 16 x 4 pcs) 4 GB (256 MB x 16 x 8 pcs)

Maximum Memory

4 GB

NETWORKING/COMMUNICATIONS

Wireless1

Intel® Dual Band Wireless-AC 7265 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo

Communications

Realtek RTL8111HSH Controller 10/100/1000 Ethernet

Wireless access point and Internet service is required and is not included.
 Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

AUDIO/MULTIMEDIA

Audio

HP Audio Two integrated stereo speaker Headphone / microphone in combo jack



Features

Webcam¹

User Facing Camera 1 MP HD Webcam @ 1280 x 720p² Located on display Dual digital mic

NOTE: Both webcams are fix focus.

World Facing Camera
2 MP FHD Webcam @ 1920 x1080p²
Located on keyboard deck (option only available with touch display configurations)

- 1. Internet access required.
- 2. HD content required to view HD images.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS/PEN

Keyboard

Full-sized keyboard Pick-resistant Spill-resistant

Function Keys

- F1 Blank
- F2 ClickPad Enable/Disable
- F3 Sleep
- F4 Display Switching
- F5 Audio Mute/Unmute
- F6 Volume Down
- F7 Volume Up
- F8 Mic Mute/Unmute
- F9 Brightness Down
- F10 Brightness Up
- F11 Blank
- F12 Wireless On/Off

ClickPad

Multitouch gestures enabled Default on: 2-finger scroll, pinch Support Windows 10 modern Trackpad gestures Taps enabled as default

Pen

Optional HP Active Pen1

1. Sold separately or as an optional feature.

SOFTWARE AND SECURITY

BIOS

Secure Erase¹



Features

HP System Diagnostic (UEFI)

Communication / Connectivity

Native Miracast Support³ HP LAN-WLAN Protection HP Wireless Wakeup

HP Value Add Software

HP ePrint Driver + JetAdvantage^{4,8}
HP Hotkey Support – CMIT⁸
HP Jumpstart⁸
HP Support Assistant⁸
HP Noise Cancellation Software

Microsoft Products

Buy Office⁸ Bing Search Skype⁵

Manageability

HP SoftPaq Download Manager (SDM)⁸ HP System Software Manager (SSM)⁶ LANDESK Management⁷

For more information on HP Client Management Solutions refer to: http://www.hp.com/go/clientmanagement.

HP School Pack

- HP Adaptive Learning created by Fishtree⁸
- HP Simple Sign-on created by Classlink8
- HP Classroom Manager Student Edition^{2,8}
- SparkVue⁸
- Codecademy⁸
- Corinth Classroom⁸
- HP Prime Graphing Calculator⁸
- Curriculum Matrix/CMX⁸
- Oxford University Press Advanced Learners English Dictionary⁸

Security

Lock slot (Lock sold separately)
Trusted Platform Module (TPM) 2.0

- 1. For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.
- 2. HP Classroom Manager for Teachers is required and sold separately for control and device locking from the teacher's Windows desktop console; no locking and control functionality originates from HP Classroom Manager for Student. Control and device locking originate from the teacher's Windows desktop console.



Features

- 3. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast
- 4. Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see http://www.hp.com/go/eprintcenter).
- 5. Skype is not offered in China.
- 6. Not preinstalled, however available for download at http://www.hp.com/go/clientmanagement
- 7. Subscription required.
- 8. This application will not be initially available with Windows 10 S. All applications through the Windows Store will be compatible.

POWER

Power Supply¹

HP 45W Smart AC adapter HP 65W EM Smart AC adapter

Primary Battery

HP Long Life 3-cell, 41 Wh Prismatic battery

Power Cord

Power cord is 3.2 feet (1 meter)

Battery life²

Hardware details	UMA Graphics	Discrete Graphics
еММС	Up to 11 hours	N/A
SSD	Up to 10 hours 30 mins	N/A

NOTE: Battery is internal and not replaceable by customer.

System Standby Time³

TBD

- 1. Availability may vary by country.
- 2. Windows 10 MM14 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.
- 3. Talk, standby, and usage times are approximate and depend on the network configuration, the usage pattern of an individual user, and the configuration of the handheld. Use of some internal wireless capabilities, backlight will significantly decrease battery run time



Features

WEIGHTS & DIMENSIONS

Weight

Non-Touch

Starting at 2.98 lbs (1.35 kg)

Touch

Starting at 3.19 lbs (1.45 kg)

Dimensions (w x d x h) 20.795 x 30.24 x 1.99 cm 8.14 x 11.88 x .78 in

NOTE: Weight varies by configuration and components.

PORTS/SLOTS

Ports

2 USB 3.1 Gen 1 Port 1 USB Type-C™ (Data transfer only) 1 HDMI 1.4b 1 AC power connector 1 RJ-45 1 headphone/microphone combo jack

HP Multi-Format Digital Media ReaderSupport micro SD/SDHC/SDXC up to UHS-104

NOTE: All cables are sold separately.

SERVICE AND SUPPORT

HP Services offers a 1-year limited warranties and 90 day software support options depending on country. Batteries have a default one year limited warranty. On-site service and extended coverage is also available. HP Care Pack Services ^{1,2} are optional extended service contracts that go beyond the standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: http://www.hp.com/go/cpc.

- 1. Sold separately or as an optional feature.
- 2. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: http://www.hp.com/go/cpc.



Features

SYSTEM UNIT

Temperature	Operating	41° to 95° F (5° to 35° C)	
	Non-operating	-4° to 140° F (-20° to 60° C)	
Relative Humidity	Operating	10% to 90%, non-condensing	
	Non-operating	5% to 95%, non-condensing	



Technical Specifications

DISPLAYS

Note: All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

29.4 cm (11.6") diagonal Outline Dimensions

HD SVA anti-glare slim

LED non-touch (1366 x Active Area

768)

278.5 x 168.5 (mm) max

256.13 x 144.0 (mm)

Weight 210 g max

Diagonal Size 11.6 (inch)

Contrast Ratio 300:1 (typical)

Refresh Rate 60 Hz

Brightness 220 nits

Format 1366 x 768 (HD)

Pixel Resolution

Configuration RGB

Interface eDP 1.2

PPI 135 ppi

Backlight LED

Color Gamut Coverage 45%

Color depth 6 bit

Viewing Angle SVA 45/45/25/35

29.4 cm (11.6") diagonal Outline Dimensions

HD SVA slim LED touch

screen (1366 x 768)

Active Area

278.5 x 168.5 (mm) max

256.13 x 144.0 (mm)

Weight 360 g max

Diagonal Size 11.6 (inch)

Contrast Ratio 300:1 (typical)



Refresh Rate 60 Hz

Brightness 220 nits

Format 1366 x 768 (HD)

Pixel Resolution

Configuration RGB

Interface eDP 1.2

PPI 135 ppi

Backlight LED

Color Gamut Coverage 45%

Color depth 6 bit

Viewing Angle SVA 45/45/25/35

Pen Enabled Yes

STORAGE AND DRIVES

128 GB SATA-3 Solid State Drive **Drive Weight** 10 grams

Capacity 128 GB

Height 0.091 in (2.3 mm)

Width 0.87 in (22 mm)

Interface ATA-8, SATA 3.0

Performance Sequential Read Sequential Write

Between 520 MB/s and 535 MB/s Between 185 MB/s and 515 MB/s

Logical Blocks 250,069,680

Operating Temperature 32° to 158°F (0° to 70°C) [case temp]

Features ATA Security; ATA-8; SATA 3.0; DIPM; TRIM; DVESLP



128 GB SATA-3 Solid State Drive TLC **Drive Weight** 10 grams

Capacity 128 GB

Height 0.09 in (2.3 mm)

Width 0.87 in (22 mm)

Interface ATA-8, SATA 3.0

Performance Sequential Read Sequential Write

Between 520 MB/s and 530 MB/s Between 380 MB/s and 500 MB/s

Logical Blocks 250,069,680

Operating Temperature 32° to 158°F (0° to 70°C) [case temp]

Features ATA Security; ATA-8; SATA 3.0; DIPM; TRIM; DVESLP

256 GB SATA-3 Solid State Drive **Drive Weight** 10 grams

Capacity 256 GB

Height 0.091 in (2.3 mm)

Width 0.87 in (22 mm)

Interface 500118192

Performance Sequential Read Sequential Write

Between 520 MB/s and 535 MB/s Between 330 MB/s and 515 MB/s

Logical Blocks 250,069,680

Operating Temperature 32° to 158°F (0° to 70°C) [case temp]

Features ATA Security; ATA-8; SATA 3.0; DIPM; TRIM; DVESLP

256 GB SATA-3 Solid State Drive Weight 10 grams

Drive TLC

Capacity 256 GB

Height 0.09 in (2.3 mm)

Width 0.87 in (22 mm)



Interface ATA-8, SATA 3.0

Performance Sequential Read Sequential Write

Up to 515 MB/s Up to 490 MB/s

Logical Blocks 500,118,192

Operating Temperature 32° to 158°F (0° to 70°C) [case temp]

Features ATA Security; ATA-8; SATA 3.0; DIPM; TRIM; DVESLP

64 GB embedded Multi Media Card **Drive Weight** Up to 2g

Capacity 64 GB

Height 1.4mm

Package Size 12x16 mm

Interface MMC protocol v4.51

Performance Sequential Read: 100MB/s (min.)

Sequential Write: 40MB/s (min.)

Features Embedded Multi Media Card v4.51 compliant, TRIM, Secure Erase, CMD5

support, Partition management, Enhanced Write Protection, HS200

support

NETWORKING/COMMUNICATIONS

Intel® Dual Band Wireless-AC 7265 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo

Wireless LAN Standards IEEE 802.11a

IEEE 802.11b IEEE 802.11g



IEEE 802.11n

IEEE 802.11ac

Interoperability Wi-Fi certified

Frequency Band 802.11b/q/n

2.402 - 2.482 GHz

Note:

The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.

802.11a/n

4.9 – 4.95 GHz (Japan)

5.15 - 5.25 GHz

5.25 - 5.35 GHz

5.47 - 5.725 GHz

5.825 - 5.850 GHz

Note: Indonesia no support this band)

Data Rates

802.11b: 1, 2, 5.5, 11 Mbps

802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)

802.11ac: MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)

Modulation Direct Sequence Spread Spectrum

BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM

Security¹

IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only

AES-CCMP: 128 bit in hardware

802.1x authentication

WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.

WPA2 certification

IEEE 802.11i

Cisco Certified Extensions, all versions through CCX4 and CCX Lite

WAPI

Network Architecture

Ad-hoc (Peer to Peer)

Models

Infrastructure (Access Point Required)

Roaming

IEEE 802.11 compliant roaming between access points



Output Power² • 802.11b: +16dBm minimum

• 802.11g: +14dBm minimum

• 802.11a: +14dBm minimum

802.11n HT20(2.4GHz): +14dBm minimum
 802.11n HT40(2.4GHz): +12dBm minimum

• 802.11n HT20(5GHz): +14dBm minimum

• 802.11n HT40(5GHz): +12dBm minimum

Power Consumption Transmit: 2.0 W (max)

Receive: 1.6 W (max)

Idle mode (PSP): 180 mW (WLAN Associated)

Idle mode: 50 mW (WLAN unassociated)

Connect Standby: 10 mW (WLAN+BT)

Radio disabled: 5 mW

Power Management ACPI and PCI Express compliant power management

802.11 compliant power saving mode

Receiver Sensitivity³ 802.11b, 1Mbps: -94dBm maximum

802.11b, 11Mbps: -86dBm maximum

802.11g, 6Mbps: -88dBm maximum

802.11g, 54Mbps: -74dBm maximum

802.11a, 6Mbps: -88dBm maximum

802.11a, 54Mbps: -74dBm maximum

802.11n, MCS07: -69dBm maximum

802.11n, MCS15: -66dBm maximum

802.11ac, 1SS, MCS-0: -86dBm maximum

802.11ac, 1SS, MCS-9: -61dBm maximum

802.11ac, 2SS, MCS-0: -83dBm maximum

802.11ac, 2SS, MCS-9: -58dBm maximum

Antenna type High efficiency antenna with spatial diversity, mounted in the display

enclosure

Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications



Form Factor PCI-Express M.2 MiniCard

Dimensions Type 2230 : 2.3 x 22.0 x 30.0 mm

0r

Type 1630: 2.3 x 16.0 x 30.0 mm

Weight Type 2230: 2.8g

0r

Type 1630: 2g

Operating Voltage 3.3v +/- 9%

Temperature Operating 14° to 158° F (-10° to 70° C)

Non-operating -40° to 176° F (-40° to 80° C)

Humidity Operating 10% to 90% (non-condensing)

Non-operating 5% to 95% (non-condensing)

Altitude Operating 0 to 10,000 ft (3,048 m)

Non-operating 0 to 50,000 ft (15,240 m)

LED Activity LED Amber – Radio OFF; LED White – Radio ON

1. Check latest software/driver release for updates on supported security features.

2. Maximum output power may vary by country according to local regulations.

3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

Bluetooth Specification 4.0/4.1/4.2 Compliant

Frequency Band 2402 to 2480 MHz

Number of Available Channels Legacy: 0~79 (1 MHz/CH)

BLE: 0~39 (2 MHz/CH)

Data Rates and Throughput Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps

BLE: 1 Mbps data rate; throughput up to 0.2 Mbps

Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice

channels

Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps

asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)



Technical Specifications

Transmit Power The Bluetooth component shall operate as a Class II Bluetooth device

with a maximum transmit power of + 4 dBm for BR and EDR.

Receiver Sensitivity

Legacy

Modulation	0.01% BER	0.001% BER
GFSK	-80 dBm	-70 dBm
π/4-DQPSK	-80 dBm	-70 dBm
8DPSK	-80 dBm	-70 dBm

Power Consumption Peak (Tx) 330 mW

Peak (Rx) 230 mW

Selective Suspend 17 mW

Range Legacy Up to 33 ft (10 m)

BLE Up to 99 ft (30 m)

Electrical Interface USB 2.0 compliant

Bluetooth Software Supported Microsoft Windows Bluetooth Software

Link Topology

Electrical Interface Point to Point, Multipoint Pico Nets up to 7 slaves

Bluetooth Software Supported Full support of Bluetooth Security Provisions

Security

Power Management Microsoft Windows ACPI, and USB Bus Support

Certifications Self-configurable to optimize power conservation in all operating

modes, including Standby, Hold, Park, and Sniff

Security All necessary regulatory approvals for supported countries, including:

Certifications FCC (47 CFR) Part 15C, Section 15.247 & 15.249

Bluetooth Profiles Supported

Power Management ETS 300 328, ETS 300 826

Certifications Low Voltage Directive IEC950

Certifications UL, CSA, and CE Mark



Bluetooth Profiles Supported Serial Port Profile (SPP)^{1.2}

Service Discovery Application Profile (SDAP)

Dial-Up Networking (DUN)1,1

Generic Object Exchange Profile (GOEP)1,2

Object Push Profile (OPP)1,2

Hard Copy Cable Replacement (HCRP)^{1,2} Personal Area Networking Profile (PAN)^{1,0} Human Interface Device Profile (HID)^{1,0}

Hands Free Profile (HFP) 1.5/1.6

Advanced Audio Distribution Profile (A2DP) 1.3

Audio Video Remote Control Profile (AVRCP) 1.3/1.4

Bluetooth V4.1/V4.2 support feature

V4.1: ESR5/6/7 compliant

V4.2: ESR8 compliant, LE Secure Connection – Basic.

AUDIO/MULTIMEDIA

Hardware Implementation

Function Key Volume

Controls
Full Duplex
Microphone In

Headphone/Line Out
Integrated Microphone

Audio Output Quality Frequency Response

Signal to Noise Ratio

Total Harmonic
Distortion
Noise Floor



Play/Record Sampling

Rate(s)
DAC
ADC

Integrated Stereo Speakers Power Rating Impedance

POWER

HP 45 Watt Smart Dimensions (H x W x D) 95x40x26.5mm

AC adapter Weight 200g +/- 10g

Input

Input Efficiency 87.74 % at 115 Vac and 88.4 % at 230Vac

Input frequency range 47 ~ 63 Hz

Input AC current Max. 1.4 A at 90 Vac

Output Output power 45W

DC output 19.5V

Hold-up time 5ms at 115 Vac input

Output current protection <8.0A

Connector C6 (3pin/with grounded, with Smart ID DC connector)

Environmental Design Operating 320F to 950F (0oto 350C)

temperature

Non-operating (storage) -4oF to 185oF (-20oto 85oC)

temperature

Altitude 0 to 16,400 ft (0 to 5000m)

Humidity 20% to 95%

Storage Humidity 10% to 95%

EMI and Safety *CE Mark - full compliance with LVD and EMC directives **Certifications**



* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.

* MTBF - over 200,000 hours at 25°C ambient condition.

HP 65W EM Smart AC Adapter

Dimensions $(H \times W \times D)$

127.0x51.0x30.0mm

Weight 350g +/- 10g

Input

Input Efficiency

88.0 % at 115 Vac and 89.0 % at 230Vac

Input frequency range

47 ~ 63 Hz

Input AC current

Max. 1.7 A at 90 Vac

Output

Output power

65W

DC output

19.5V

Hold-up time

5ms at 115 Vac input

Output current protection <11.0A

Connector

C6 (3pin/with grounded, with Smart ID DC connector)

Environmental Design

Operating

32oF to 95oF (Ooto 35oC)

temperature

Non-operating (storage) -4oF to 185oF (-20oto 85oC)

temperature

Altitude 0 to 16.400 ft (0 to 5000m)

Humidity 20% to 95%

Storage Humidity 10% to 95%

EMI and Safety Certifications

*CE Mark - full compliance with LVD and EMC directives

* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC

Class B, CISPR22 Class B, CCC, NOM-1 NYCE.

* MTBF - over 200,000 hours at 25°C ambient condition.



Technical Specifications

HP 3-cell Li-ion Prismatic Battery (41 WHr) **Cells/Type** 3-cell Prismatic

Watt-hour capacity 41WHr

Temperature Operating (Charging) 32° to 113° F (0° to 45° C)

Operating (Discharging) 14° to 140° F (-10° to 60° C)

Non-operating -4° to 140° F (-20° to 60° C)

Warranty Batteries have a default

one year limited

warranty except for Long Life batteries which will have same 1-year or 3year limited warranty as

the platform

ENVIRONMENTAL

Eco-Label Certifications & declarations	 This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: IT ECO declaration US ENERGY STAR® EPEAT[□] Gold registered in the United States. See http://www.epeat.net for registration status in your country. Search keyword <i>generator</i> on HP's 3rd party option store for solar energy accessory at http://www.hp.com/go/options. 		
System Configuration Energy Consumption (in accordance with US	The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook". 115VAC, 60Hz 230VAC, 50Hz 100VAC, 50Hz		



Technical Specifications

ENERGY STAR® test method)				
Normal Operation (Short idle)	3.79 W	4.77 W	3.73 W	
Normal Operation (Long idle)	2.29 W	2.76 W	2.24 W	
Sleep	0.29 W	0.38 W	0.29 W	
Off	0.24 W	0.32 W	0.24 W	
	Note:		I	
	Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo a compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typical configured PC featuring a hard disk drive, a high efficiency power supply, and Microsoft Windows® operating system.			
Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz	
Normal Operation (Short idle)	13 BTU/hr	16 BTU/hr	13 BTU/hr	
Normal Operation (Long idle)	8 BTU/hr	9 BTU/hr	8 BTU/hr	
Sleep	1 BTU/hr	1 BTU/hr	1 BTU/hr	
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr	
	*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.			
Declared Noise Emissions	Sound Power		Sound Pressure	
(in accordance with ISO 7779 and ISO 9296)	(L _{WAd} , bels)		(L _{pAm} , decibels)	
Typically Configured – Idle	2.6		15	
Fixed Disk – Random writes	2.6		15	
Longevity and Upgrading	This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:			
	3 USB ports			



Technical Specifications

cillicat Specification	7113		
Batteries	 1 PC card slot (type I/II) 1 ExpressCard/54 slot 1 IEEE 1394 Port 2 SODIMM memory slots Optional expansion base docking station 1 multi-bay II storage port Interchangeable HDD?? Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.		
	This battery(s) in this product comply with EU Directive 2006/66/EC Batteries used in the product do not contain: Mercury greater the1ppm by weight Cadmium greater than 20ppm by weight Battery size: CR2032 (coin cell)		
	Battery type:	. Lianuili	
Additional Information	 This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680 (EPEAT) standard at the gold level, see www.epeat.net Plastics parts weighing over 25 grams used in the product are marked per IS011469 and IS01043. This product contains 0% post-consumer recycled plastic (by wt.) This product is 98.5% recycle-able when properly disposed of at end of life. 		
Packaging Materials	External:	PAPER/Corrugated	318 g
	Internal:	PLASTIC/Polyethylene Expanded - EPE	25 g
		PLASTIC/Polyethylene low density – LDPE	18 g
		PLASTIC/Polypropylene - PP	3 g
	The plastic p	packaging material contains at least 50% recycled content.	
	_	ited paper packaging materials contains at least 75% recyc	led
Material Heads	content.	t does not contain any of the following substances in	overes of
Material Usage	-	t does not contain any of the following substances in	
	regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf):		
			•
		estos	
	Certain Azo Colorants Certain Prominated Flores Patendants		
	 Certain Brominated Flame Retardants – may not be used as flame retardants in plastics 		
	Cadmium		
	• Chlo	orinated Hydrocarbons	



Technical Specifications

	 Chlorinated Paraffins Formaldehyde Halogenated Diphenyl Methanes Lead carbonates and sulfates Lead and Lead compounds Mercuric Oxide Batteries
	 Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. Ozone Depleting Substances Polybrominated Biphenyls (PBBs) Polybrominated Biphenyl Ethers (PBBEs) Polybrominated Biphenyl Oxides (PBBOs) Polychlorinated Biphenyl (PCB) Polychlorinated Terphenyls (PCT) Polyvinyl Chloride (PVC) – except for wires and cables, has been voluntarily removed from most applications. Radioactive Substances Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging Usage	 HP follows these guidelines to decrease the environmental impact of product packaging: Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



HP,	Inc.	Corporate
Envir	onment	al
Inforr	nation	

For more information about HP's commitment to the environment:

Global Citizenship Report

http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications

http://www8.hp.com/us/en/hp-information/environment/ecolabels.html ISO 14001 certificates:

http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c047558

and

http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf

COUNTRY OF ORIGIN

China



Options and Accessories (sold separately and availability may vary by country)

Туре	Description	Part Number
Carrying Cases	HP Essential Top Load Case (up to 15.6")	H2W17AA#xxx
	HP Essential Backpack (up to 15.6")	H1D24AA
	HP Slim Top Load	F3W15AA
	HP Slim Backpack	F3W16AA
	HP ProBook x360 Protective Case	1JS00AA
Docking	HP USBC Travel Dock	TOK29AA
	HP Elite USBC Dock	X7W54AA#xxx
	HP 3005pr USB3 Port Replicator	Y4H06AA
Input/Output	HP Slim USB Keyboard & Mouse Bundle	T6T83AA#xxx
	HP 3-Button Laser Mouse	H4B81AA#xxx
	HP 2.4GHz Wireless Mouse	LOZ84AA#xxx
	HP Slim Wireless keyboard and mouse	T6L04AA#xxx
	HP HDMI to VGA Adapter	H4F02AA
	HP Stereo USB Headset	T1A67AA
	HP Stereo 3.5mm Headset	T1A66AA
	HP Active Pen	1FH00AA#xxx
Power	HP 45W Smart AC Adapter 4.5mm	H6Y88AA#xxx
	65W Smart AC Adapter	H6Y89AA#xxx
	HP Notebook Powerbank	N9F71AA#xxx
Storage	HP External USB Optical Drive	F2B56AA
Security	HP Keyed Cable Lock 10mm	T1A62AA



Summary of Changes

Date of change:	Version History:		Description of change:
November 30, 2016	V1 to V2	Launched	Quickspecs launched
December 19, 2016	V2 to V3	Update	Environmental section updated
December 21, 2016	V3 to V4	Update	Environmental section updated
January 20, 2017	V4 to V5	Update	Disclaimer added to Processors Section
January 26, 2017	V5 to V6	Update	Options and Accessories Section updated HP Active Pen, 1FH00AA#xxx
February 2, 2017	V6 to V7	Update	At a Glance Section updated (MIL STD 810G references)
March 9, 2017	V7 to V8	Update	Updated Note in Operating System and Processor sections
March 21, 2017	V8 to V9	Update	Displays Section updated (Weight updated)
April 4, 2017	V9 to V10	Update	Battery Warranty updated
April 4, 2017	V10 to V11	Added	Processors Family added
April 6, 2017	V11 to V12	Added	Storage and Drives updated (added 128/256GB TLC SSD)
April 12, 2017	V12 to v13	Update	Battery section updated
April 19, 2017	V13 to V14	Update	Dimensions updated
July 10, 2017	V14 to v15	Update	At a Glance section updated (Windows 10 S); Operating System section updated (Windows 10 S); Software and Security section updated (Windows 10 S); Options and Accessories section updated (Windows 10 S); System Unit section added.
October 2, 2017	V15 to V16	Update	Touchpoint removed
November 8, 2017	V16 to V17	Update	Options and Accessories Section updated
November 15, 2017	V17 to V18	Update	Options and Accessories Section updated
November 28, 2017	V18 to V19	Update	Environmental data added
March 26,2018	V19 to V20	Update	Memory specs updated
July 18, 2018	V20 to V21	Update	Memory standard
September 12, 2018	V21 to V22	Update	Windows 10 S Operating system section

Copyright © 2018 HP Development Company, L.P. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Celeron and Pentium are trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark owned by its proprietor and used by HP Inc. under license. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum.

