

### Technical Specifications


#### HP Z23n G2 23-inch Display



- |    |  |   |
|----|--|---|
| 1. | <b>Menu/OK</b>                           | Press to open the OSD menu, select a menu item from the OSD, or close the OSD menu.   |
| 2. | <b>Minus (" - ")/Down/Color Control</b>  | If the OSD menu is on, press to navigate backward through the OSD menu and decrease adjustment levels.  |
| 3. | <b>Plus (" + ")/Up/Viewing Mode Menu</b> | If the OSD menu is on, press to navigate forward through the OSD menu and increase adjustment levels.<br>if the OSD menu is inactive, press to activate Color control selection |
| 4. | <b>Exit/Back/Next Active Input</b>       | If the OSD menu is on, press to exit menu<br>if the OSD menu is inactive, press to activate the source button that chooses the video signal input (VGA, HDMI, or DisplayPort)   |
| 5. | <b>Power/Power LED</b>                   | Turns the monitor on or off.<br>LED:<br>fully powered = white;<br>sleep mode = amber;<br>sleep timer mode = flashing amber.   |

### Technical Specifications


#### HP Z23n G2 23-inch Display

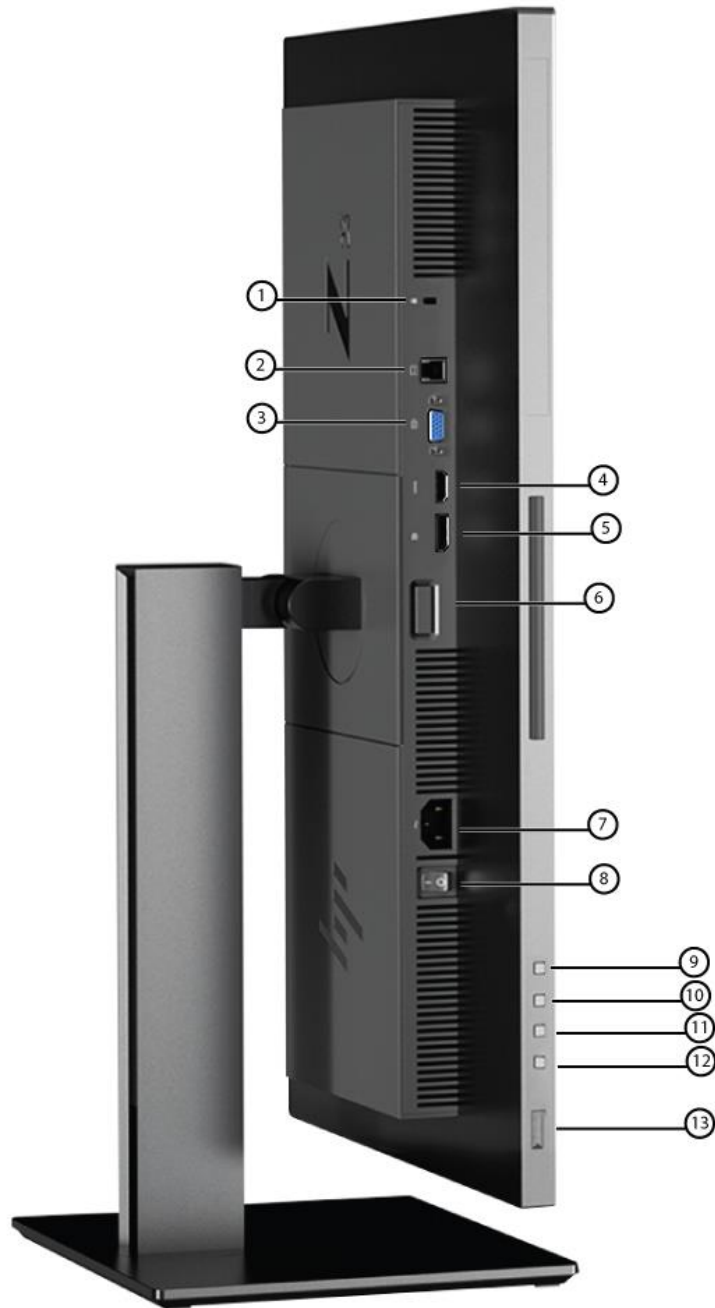

- |                              |  |   |
|------------------------------|--|---|
| <b>1.</b> Security Lock Slot | <b>6.</b> Stand Quick Release Button     | <b>11.</b> Minus ("-")/Down/Viewing Models Menu |
| <b>2.</b> USB 3.0 Upstream   | <b>7.</b> Power Connector Port           | <b>12.</b> Exit/Back/Information                |
| <b>3.</b> VGA Input          | <b>8.</b> Power Switch                   | <b>13.</b> Power/Power LED                      |
| <b>4.</b> HDMI 1.4           | <b>9.</b> Menu/OK                        |   |
| <b>5.</b> DisplayPort™ 1.2   | <b>10.</b> Plus ("+")/Up/Next Input Port |   |

### Technical Specifications

#### HP Z23n G2 23-inch Display

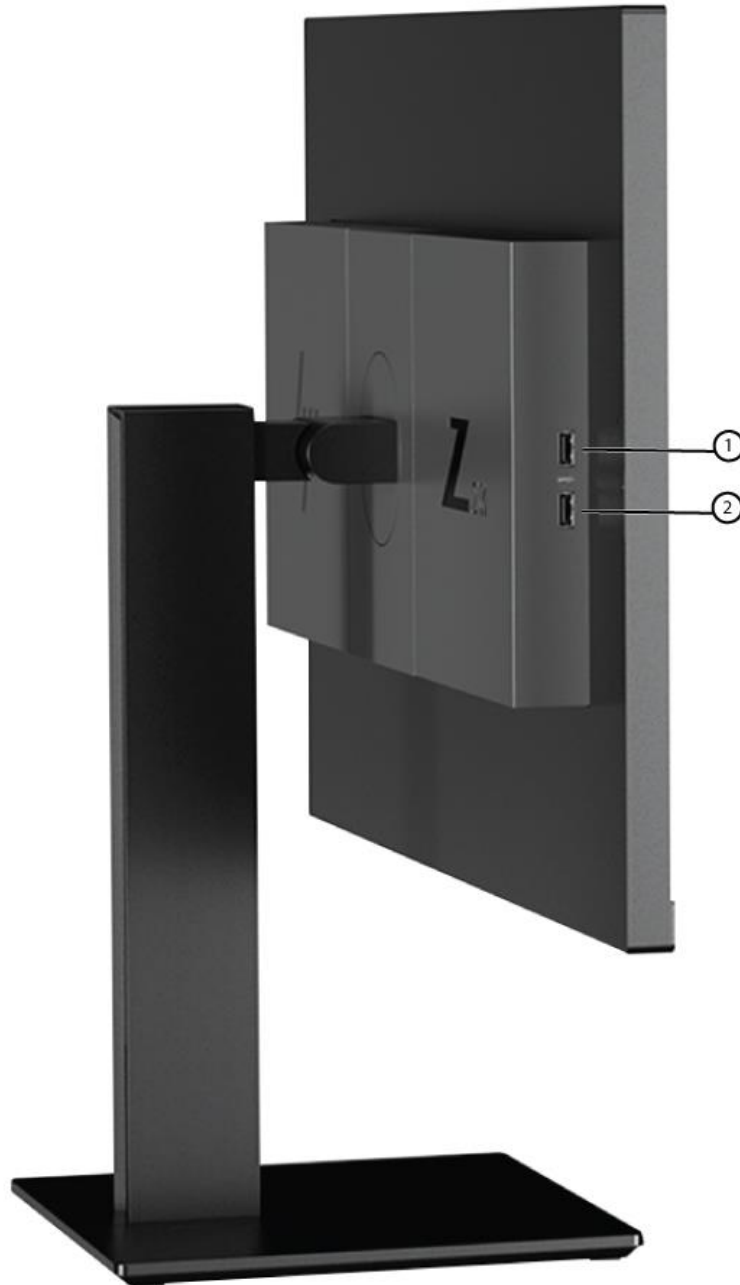

1. USB 3.0 Type-A
2. USB 3.0 Type-A

### Technical Specifications

Models: 1JS06A4, 1JS06A8

<b>Panel Specifications</b>	<b>Display Size (Diagonal)</b>	23-inch	
	<b>Viewable Image Area (diagonal)</b>	<b>58,4cm</b> (23 in) widescreen; diagonally measured	
	<b>Display Panel Type</b>	IPS, LED Backlight	
	<b>Micro-Edge Bezel</b>	Yes, 3 sided	
	<b>Panel Hardness</b>	3H	
	<b>Native Resolution/Timing</b>	1920 x 1080 @ 60 Hz	
		Note: The Display can support up to 75Hz refresh for some video modes. The video card of the connected PC must be capable of supporting 75Hz. The preferred Mode is 1920 x 1080 @ 60 Hz.	
	<b>Panel Bit Depth</b>	8 Bit (6 Bit + A-FRC) 16.7 Million colors	
	<b>Aspect Ratio</b>	16:9	
	<b>Brightness* - Typical</b>	250 cd/m <sup>2</sup>	
	<b>Static Contrast Ratio* - Typical</b>	1,000:1	
	<b>Dynamic Contrast Ratio* - Typical</b>	10,000,000:1	
	<b>Flicker Free</b>	Yes	
	<b>Pixel Pitch</b>	0.2652 mm	
	<b>Pixels Per Inch (PPI)</b>	96	
	<b>Backlight Lamp Life (to half brightness - in hours)</b>	30,000 hours minimum	
	<b>Low Blue Light Capable</b>	Yes, user selectable in OSD Menu	
	<b>Anti-Glare Panel</b>	Yes, Haze 25%	
	<b>Response Time* – Typical</b>	5ms Gray to Gray	
		* Product default is 14.0ms response time and can be adjusted to as low as 5.4ms in the display menu. See user guide for more information.	
		<b>Horizontal Viewing Angle (typical CR&gt;10)</b>	Up to 178° horizontal (10:1 minimum contrast ratio)
		<b>Vertical Viewing Angle (typical CR&gt;10)</b>	Up to 178° vertical (10:1 minimum contrast ratio)
		<b>Panel Active Area (w x h)</b>	<b>50,92 x 28,64 cm</b> (20.04 x 11.27 in)
	<b>Preset Graphic Modes/Supported Resolutions</b>	640 x 480 @ 60Hz, 75Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 75Hz 1024 x 768 @ 60 Hz, 75Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz, 75Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz, 75Hz	
	<b>Maximum Resolution</b>	1920 x 1080 @ 60 Hz	
	<b>Recommended Resolution</b>	1920 x 1080 @ 60 Hz	
	<b>Vertical Scan Range</b>	50-75 Hz	
	<b>Horizontal Scan Range</b>	30-84 kHz	
	<b>Maximum Pixel Clock Speed</b>	180 MHz	
<b>Color Gamut Coverage</b>	<b>sRGB*</b>	>94% sRGB	
<b>Color Management</b>	<b>Factory Color Calibrated</b>	Yes	
	<b>Factory Calibration Accuracy</b>		
	<b>White Point Maximum</b>	3.0 ΔE 2000	
	<b>Grayscale Average (255 levels) Maximum</b>	3.0 ΔE 2000	
	<b>Gamma Target Tolerance (2.2 for sRGB, 2.4 for BT.709)</b>	±0.1	

### Technical Specifications

	<b>X-Rite ColorChecker Average Maximum</b>	3.0 ΔE 2000
	<b>Default Color Temperature</b>	SRGB (D65)
<b>Monitor Specifications</b>	<b>Exterior Color of Monitor Bezel &amp; Stand Plug &amp; Play</b>	Black Pearl Head, Chin, and Base (Die-Cast Aluminum) Yes
	<b>Tilt</b>	-5° to +22° vertical
	<b>Swivel</b>	Swivel +/- 45
	<b>Pivot</b>	Yes, Pivot (CW & counter CW). Detent at 0 degrees
	<b>Height Adjustment Range</b>	Yes, 0 to 150 mm
	<b>4-Way Comfort Adjust</b>	Easily adjust the display in height, tilt, swivel and pivot for maximum comfort.
	<b>Integrated Quick Release<sup>5</sup></b>	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts.
	<b>Cable Management</b>	Enhanced cable management for easy concealment of power, video and USB cables. Effortless routing of cables through the cable management tunnel at the base of the column.
	<b>VESA Mounting</b>	Yes (one set of standard 4-hole pattern, 100 mm).
	<b>Security Lock Ready</b>	Yes
	<b>Detachable Base</b>	Yes
	<b>Warranty</b>	Protected by HP, including a 3-year standard limited warranty. Optional HP Care Pack Services are extended service contracts that extend your protection beyond the standard warranties. <sup>7</sup>
	<b>Zero Bright Dot Guarantee</b>	Yes
		Note: The HP Pixel Policy allows no bright sub-pixel defects for this display. For complete details, see <a href="http://support.hp.com/us-en/document/c00288895">http://support.hp.com/us-en/document/c00288895</a> .
<b>On Screen Display (OSD)</b>	<b>On Screen Display User Controls</b>	Brightness, Contrast, Color Control, Input Control, Image Control, Power Control, Menu Control, Management, Language, Information, Exit
	<b>Monitor Control Buttons or Switches</b>	Menu/OK, Minus button/Down/Color Control, Plus button/Up/Viewing Mode Menu, Exit/Back/Next Active Input, Power
	<b>User-Assignable Function Buttons</b>	Yes, 10
	<b>Languages</b>	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
<b>Connector Types</b>	<b>DisplayPort™</b>	(1) DisplayPort™ 1.2
	<b>HDMI</b>	(1) HDMI 1.4
	<b>VGA</b>	(1) VGA
	<b>HDCP Support</b>	Yes, DisplayPort™ and HDMI
<b>USB Port Specifications</b>	<b>USB Version</b>	3.0
	<b>USB Hub</b>	Yes, 2 downstream ports
	<b>Downstream Ports</b>	2 Ports
	<b>Upstream Ports</b>	1 Port
<b>Power &amp; Operating Specs</b>	<b>Power Supply</b>	Internal
	<b>Input Power</b>	100 - 240 VAC 50/60 Hz
	<b>Power Consumption – Maximum<sup>2</sup></b>	32 W

### Technical Specifications

	<b>Energy Saving/Standby Mode Power Consumption – Typical<sup>1</sup></b>	0.5 W	
	<b>Power cable length</b>	18 W	
		1,9 m (6.2 ft)	
<b>ENERGY STAR® Data</b>	<b>Operational Mode at 100 VAC</b>	50.82 KWH/year	
	<b>Operational Mode at 115 VAC</b>	50.82 KWH/year	
	<b>Operational Mode at 230 VAC</b>	50.82 KWH/year	
<b>EU Energy Efficiency Class (EC1062)</b>	<b>On-mode Power Consumption (EC 1062/2010)</b>	21W	
	<b>Annual Power Consumption (EC 1062/2010)</b>	31 kWh	
	<b>Energy Efficiency Class (EC 1062/2010)</b>	A	
<b>Operating Conditions</b>	<b>Operating Temperature - Celsius</b>	<b>5° to 35° C</b>	
	<b>Operating Temperature - Fahrenheit</b>	41° to 95° F	
	<b>Non-operating Temperature - Celsius</b>	<b>-20° to 60° C</b>	
	<b>Non-operating Temperature - Fahrenheit</b>	-4° to 140°	
	<b>Operating Humidity</b>	20% to 80% non-condensing	
	<b>Non-operating Humidity</b>	5% to 95%, 38.7° C max wet-bulb	
	<b>Operating Altitude</b>	<b>0 to 5,000 m (16,404 ft)</b>	
	<b>Non-operating Altitude</b>	<b>0 to 12,192 m (0 to 40,000 ft)</b>	
<b>Environmental Features and Certifications</b>	<b>Mercury-free LED display backlighting</b>	Yes	
	<b>Arsenic-Free Display Glass</b>	Yes	
	<b>Low Halogen<sup>3</sup></b>	Yes	
	<b>ENERGY STAR® Qualified</b>	Yes	
	<b>EPEAT® Registered<sup>6</sup></b>	Yes, Gold	
	<b>China Energy Label</b>	CEL Grade 1	
	<b>TCO Certified Edge</b>	Yes	
	<b>TCO Certified</b>	Yes	
	<b>SmartWay Transport Partnership - NA only</b>	Yes	
	<b>Certification &amp; Compliance</b>	CE, CB, MSIP, Mexico COC, ICES, ISO 9241-307, CU, cTUVus, ISC, CCC, CEL Grade 1, VCCI, FCC, BSMI, WEEE, RCM, ErP, KC/E-Standby, SEPA, GS, TUV-S, TCO, TCO Edge, Australian-New Zealand MEPS, PSB, Vietnam MEPS, ENERGY STAR® Qualified, EPEAT® Gold <sup>6</sup> , SmartWay Transport Partnership - NA only	
	<b>Country of Origin</b>	China	
<b>Recycled Plastics</b>	<b>Back Cover</b>	85%	
	<b>Base/Stand</b>	85%	
	<b>Other Parts</b>	85% (Deco, Middle Frame)	
	<b>Recyclable Plastics</b>	All	
	<b>Recyclable Packaging (Box, packing materials)</b>	All	
<b>Unit Product/Package Specifications</b>	<b>Unpacked with stand (highest setting)</b>	Metric	Imperial
	Product Dimensions (W x D x H)	<b>52,1 x 20,5 x 45,8 cm</b>	20.5 x 8.07 x 18 in
	<b>Head Only</b>		
	Product Dimensions (W x D x H)	<b>52,1 x 4,33 x 31,17 cm</b>	21.5 X 1.7 X 12.27 in
	<b>Base Area Footprint</b>		
	Product Dimensions (W x D x H)	<b>23,7 x 1,1 x 2,05 cm</b>	9.33 x .43 x 8.07 in

### Technical Specifications

	<b>Packaged</b> Packaged Dimensions (W x D x H)	<b>60,2 x 39 x 26,5 cm</b>	23.7 x 15.4 x 10.4 in
	<b>Bezel Measurements</b>	<b>Top: 0,135 cm</b> <b>Side: 0,135 cm</b> <b>Bottom: 1,84 cm</b>	Top: 0.053 in Side: 0.053 in Bottom: 0.724 in
	<b>Product Weight, Packed</b>	<b>8,4 kg</b>	18.5 lbs
	<b>Product Weight, Unpacked</b>	<b>5,9 kg</b>	13 lbs
	<b>Product Weight, Head Only</b>	<b>3,3 kg</b>	7.3 lbs
<b>Pallet Information</b>	<b>Pallet Dimensions (L x W x H mm)</b>	Pallet A: 1214 x 1078 x 2100 mm Pallet B: 1078 x 612 x 2100 mm	
	<b>Pallet Dimensions (L x W x H inch)</b>	Pallet A: 47.8 x 42.44 x 82.68 (inch) Pallet B: 42.44 x 24.1 x 82.68 (inch)	
	<b>Pallet Total Weight (including units) kg</b>	Pallet A: 364kg Pallet B: 186kg	
	<b>Pallet Total Weight (including units) lbs</b>	Pallet A: 800.8lbs Pallet B: 409.2lbs	
	<b>Pallet Layers</b>	Pallet A: 5 layers Pallet B: 5 layers	
	<b>Pallet Product per Layer</b>	Pallet A: 8 units Pallet B: 4 units	
	<b>Total Products per Pallet</b>	Pallet A: 40 units Pallet B: 20 units	
<b>What's in the box?</b>	<b>Monitor</b>	HP Z23n G2 23-inch Display	
	<b>AC Power Cord</b>	Metric 1,9 m	Imperial 6.2 ft
	<b>DisplayPort™ 1.2 Cable</b>	2 m	6.56 ft
	<b>USB 3.0, b-a Cable</b>	1,8 m	5.9 ft
	<b>Documentation CD</b>	HP Display Assistant software, User Guide, warranty and drivers. HP Display Assistant is a software utility that enables theft deterrence and allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC or workstation.	
<b>User Guide and Warranty Languages</b>	<b>User Guide Languages</b>	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.	
	<b>Warranty Languages</b>	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.	
<b>Options<sup>4</sup> (Each sold separately)</b>	<b>HP S100 Speaker Bar</b> — Part number 2LC49AA	Add rich stereo audio to select 2017 and 2018 HP Commercial Displays <sup>4</sup> without crowding your desk with the USB-powered HP S100 Speaker Bar, which fits neatly underneath the display head.	

### Technical Specifications

**HP B300 PC Mounting Bracket** — Part number 2DW53AA

Attach your HP Workstation, HP Desktop Mini, HP Chromebox or select HP Thin Client directly behind select 2017 and 2018 HP EliteDisplays and HP Z Displays with the HP B300 PC Mounting Bracket.

**HP UHD USB Graphics Adapter** — Part number N2U81AA

Just plug the adapter into any USB 2.0 or 3.0 port on your PC and connect the DisplayPort™ connector on the other end to your UHD display.

**HP Single Monitor Arm** — Part number BT861AA

The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 50 degrees of tilt, and 360 degrees of pan and rotation – all at your fingertips -- helping you stay comfortable and productive throughout the day.

**HP Adjustable Dual Display Stand** — Part Number AW664AA

Premium space-saving dual screen solution provides access to more monitor real estate and makes it possible to manage multiple applications simultaneously. Weight adjustable for dual monitors from 17-24". Rotate displays into portrait/landscape positions.

**HP Business PC Security Lock v2 Kit** — Part Number N3R93AA

Help prevent chassis tampering and secure your PC and display in workspaces and public areas with the HP Business PC Security Lock v2 Kit.



### Technical Specifications

<b>Eco-Label Certifications &amp; declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>• IT ECO declaration</li> <li>• US ENERGY STAR®</li> <li>• TCO Certified Edge</li> <li>• EPEAT® Gold registered in the United States. See <a href="http://www.epeat.net">http://www.epeat.net</a> for registration status in your country. Search keyword <i>generator</i> on HP's 3rd party option store for solar energy accessory at <a href="http://www.hp.com/go/options">http://www.hp.com/go/options</a>.</li> </ul>		
<b>Energy Consumption (in accordance with US ENERGY STAR® test method)</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 50Hz</b>
Normal Operation	15.28 W	16 W	15.28 W
Sleep	0.28 W	0.3 W	0.28 W
Off	0.29 W	0.3 W	0.29 W
<b>Heat Dissipation*</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 50Hz</b>
Normal Operation	52 BTU/hr	55 BTU/hr	52 BTU/hr
Sleep	1 BTU/hr	1 BTU/hr	1 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr
	*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.		
<b>Additional Information</b>	<ul style="list-style-type: none"> <li>• This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.</li> <li>• This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.</li> <li>• This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).</li> <li>• This product is in compliance with the IEEE 1680 (EPEAT) standard at the gold level, see <a href="http://www.epeat.net">www.epeat.net</a></li> <li>• Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</li> <li>• This product contains 47% post-consumer recycled plastic (by wt.)</li> <li>• This product is 98.1% recycle-able when properly disposed of at end of life.</li> </ul>		
<b>Packaging Materials</b>	<b>External:</b>	PAPER/Corrugated PAPER/Paperboard	1255 g 20 g
	<b>Internal:</b>	PLASTIC/Polystyrene Expanded – EPS PLASTIC/Polyethylene high density - HDPE	436 g 49 g
<b>RoHS Compliance</b>	HP, Inc. is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).		

### Technical Specifications

<p><b>Material Usage</b></p>	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a>):</p> <ul style="list-style-type: none"> <li>• Asbestos</li> <li>• Certain Azo Colorants</li> <li>• Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li> <li>• Cadmium</li> <li>• Chlorinated Hydrocarbons</li> <li>• Chlorinated Paraffins</li> <li>• Formaldehyde</li> <li>• Halogenated Diphenyl Methanes</li> <li>• Lead carbonates and sulfates</li> <li>• Lead and Lead compounds</li> <li>• Mercuric Oxide Batteries</li> <li>• Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li> <li>• Ozone Depleting Substances</li> <li>• Polybrominated Biphenyls (PBBs)</li> <li>• Polybrominated Biphenyl Ethers (PBBEs)</li> <li>• Polybrominated Biphenyl Oxides (PBBOs)</li> <li>• Polychlorinated Biphenyl (PCB)</li> <li>• Polychlorinated Terphenyls (PCT)</li> <li>• Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.</li> <li>• Radioactive Substances</li> <li>• Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li> </ul>
<p><b>Packaging</b></p>	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> <li>• Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li> <li>• Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li> <li>• Design packaging materials for ease of disassembly.</li> <li>• Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>• Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>• Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>• Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>
<p><b>End-of-life Management and Recycling</b></p>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/go/reuse-recycle">http://www.hp.com/go/reuse-recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/recyclers">http://www.hp.com/go/recyclers</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>

### Technical Specifications

<b>HP, Inc. Corporate Environmental Information</b>	<p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a></p> <p>Eco-label certifications <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a></p> <p>ISO 14001 certificates: <a href="http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842">http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842</a> and <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</a></p>
---	---

### Technical Specifications

Copyright © 2017 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

\*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

1. Default Power is measured with factory defaults, including factory default brightness and USB ports loaded at 25% of maximum.
2. Maximum Power is measured with monitor at maximum brightness and with USB ports loaded at 100% of maximum.
3. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
4. Sold separately. See product QuickSpecs for exact device and display compatibility.
5. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.
6. EPEAT® registered where applicable/supported. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.
7. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See <http://www.hp.com/go/cpc> for details.

