



### Overview

### HP Z27n 27-inch Narrow Bezel IPS Display

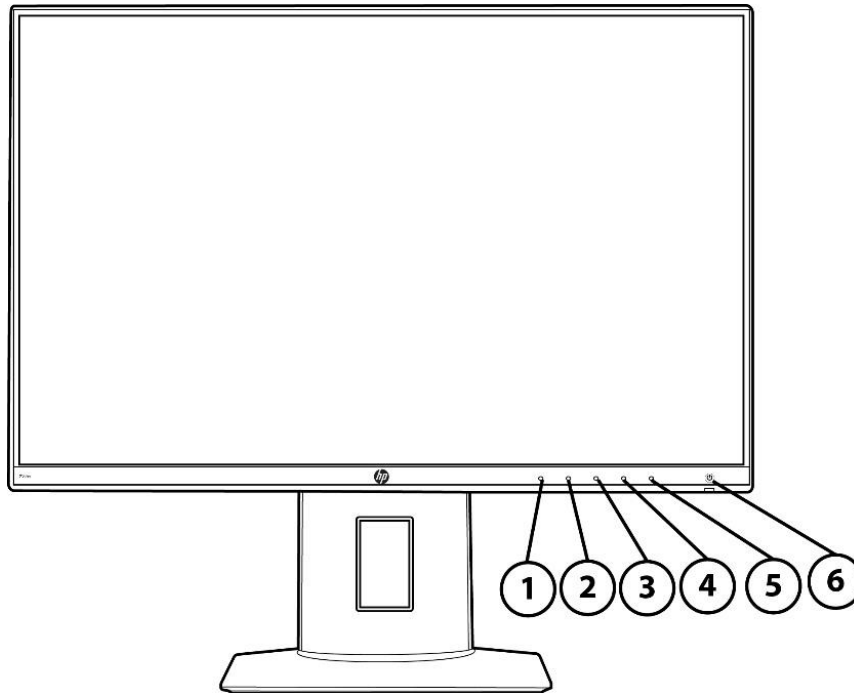

- 1. Menu button
- 2. Information
- 3. Input control

- 4. Color control
- 5. Luminance
- 6. Power button/LED

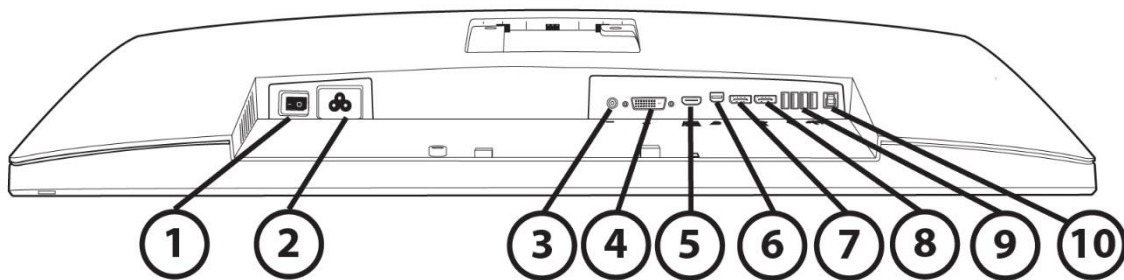

- 1. Master power switch
- 2. Power connector
- 3. Audio output 3.5 mm
- 4. DVI-Dual Link
- 5. HDMI v 1.4 input (MHL 2.0)

- 6. Mini-DisplayPort
- 7. DisplayPort v 1.2 in
- 8. DisplayPort v 1.2 out
- 9. (4) USB 3.0 downstream ports (one fast charging)
- 10. (1) USB 3.0 upstream port

### Overview

---

## Overview

Enable a virtually borderless Quad HD panorama of multiple displays<sup>1</sup> with the edge-to-edge screen of the HP Z27n 27-inch Narrow Bezel IPS Display.

### Key features:

- Get Quad HD visuals from a three-sided borderless design that reveals more of the screen.
- Enjoy reliable color accuracy across all of your projects with a factory-calibrated 99% sRGB color gamut.
- Connect to multiple display<sup>1</sup> and devices with a range of integrated ports right at the display.
- Use picture-in-picture or picture-by-picture to boost your multi-tasking productivity.
- Work comfortably with customizable tilt, height adjustment, swivel, and pivot settings.
- Get world-class service and support, and extend your protection with optional HP Care Packs.<sup>2</sup>
- Reduce power consumption and help lower your costs with an energy-efficient design.

<sup>1</sup> Each display sold separately.

<sup>2</sup> Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc). HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

### Technical Specifications

**Models:** K7C09A4, K7C09AT

<b>Panel</b>	<b>Type</b>	27-inch IPS w/LED backlight
	<b>Viewable Image Area (diagonal)</b>	<b>68,47 cm</b> (27-inch) widescreen; diagonally measured
	<b>Panel Active Area (W x H)</b>	<b>59,67 x 33,56 cm</b> (23.49 x 13.21 in)
	<b>Resolution</b>	2560 x 1440 @ 60 Hz (QHD)
	<b>Aspect Ratio</b>	16:9
	<b>Viewing Angle</b>	Up to 178° horizontal/178° vertical typical
	<b>Brightness</b>	350 cd/m <sup>2</sup>
	<b>Contrast Ratio (Typical)</b>	1000:1 Static; 5,000,000:1 Dynamic (DCR)
	<b>Response Times*</b>	14 ms typical (G-to-G); 8ms with scalar overdrive
	<b>Pixel Pitch</b>	0.2331 mm
	<b>Pixels Per Inch (PPI)</b>	108.8 DPI
	<b>Backlight Lamp Life (to half brightness)</b>	30,000 hours minimum
	<b>Color Gamut</b>	Up to 16.7 million colors with the use of FRC technology
	<b>Color Gamut (Typical)</b>	99% sRGB

\* Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

<b>User Controls</b>	<b>Buttons or Switches</b>	Menu, Information, Input Control, Color Control, Luminance
	<b>User Programmable Modes</b>	20
	<b>Languages</b>	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
	<b>On Screen Display (OSD) User Controls</b>	Luminance, Color Control, Input Control, Image Control, PIP Control, Power Control, OSD control, Management, Language, Information
	<b>Audio Controls</b>	N/A
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 - 90 kHz (DVI, DP, HDMI); 27 - 75 (MHL)
	<b>Vertical Frequency</b>	50 - 60 Hz (DVI, DP, HDMI); 24 - 60 (MHL)
	<b>Native Resolution</b>	2560 x 1440 @ 60 Hz (QHD) NOTE: The video card must be capable of supporting 2560 x 1440 @ 60 Hz to drive the monitor at the Preferred Mode.
	<b>Preset Graphic Modes (non-interlaced)</b>	640 x 480 @ 60Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz

### Technical Specifications

		1366 x 768 @ 60 Hz		
		1440 x 900 @ 60 Hz		
		1600 x 900 @ 60 Hz		
		1600 x 1200 @ 60 Hz		
		1680 x 1050 @ 60 Hz		
		1920 x 1080 @ 60 Hz		
		1920 x 1200 @ 60 Hz		
		2560 x 1440 @ 60 Hz		
<b>Video/Other Inputs</b>	<b>Maximum Pixel Clock Speed</b>	250 MHz(DVI, DP, HDMI); 150 MHz (MHL)		
	<b>Anti-Glare</b>	Yes		
	<b>Plug and Play</b>	Yes		
	<b>Input/Output Connectors</b>		(1) DVI-Dual Link	
			(1) MHL 2.0 <sup>1</sup> /HDMI 1.4	
			(1) DisplayPort 1.2 In, (1) DisplayPort 1.2 Out	
			(1) Mini DisplayPort In	
			HDCP support on all inputs	
	<b>Daisy Chain<sup>6</sup></b>	Yes, via DisplayPort™		
		Up to 2 Displays at QHD		
	Up to 4 Displays at FHD or WUXGA			
<b>USB</b>	4 USB 3.0 [4 downstream (one fast charging), 1 upstream]			
<b>Video Cables Included</b>		(1) DisplayPort <b>1,8 m</b> (5.9 ft) (1) Mini-DisplayPort <b>1,8 m</b> (5.9 ft)		
		(1) USB 3.0 <b>1,8 m</b> (5.9 ft)		
	<b>Audio</b>	(1) 3.5 mm audio-out connects headphones or HP speaker bar*		
		*Sold separately.		
<b>Multimedia</b>	<b>Speakers</b>	N/A		
<b>Power</b>	<b>Power Supply</b>	Internal		
	<b>Input Power</b>	100 - 240 VAC 50/60 Hz		
	<b>Maximum Power</b>	83 W		
	<b>Typical Power</b>	47 W		
	<b>Sleep Power</b>	0.5W (standby)		
	<b>Power Cable Length</b>	<b>1,8 m</b> (5.9 ft)		
	<b>Mechanical</b>	<b>Dimensions</b> (W × D × H)	<b>Unpacked w/stand</b>	<b>61,43 x 21,82 x 53,37 cm</b> 24.2 x 8.6 x 21.0 in (max height)
			<b>61,43 x 21,82 x 40,37 cm</b> 24.2 x 8.6 x 15.9 in (min height)	
		<b>Unpacked w/o stand</b> (head only)	<b>61,43 x 5,39 x 36,41 cm</b> (24.2 x 2.1 x 14.3 in)	
		<b>Packaged</b>	<b>73,1 x 28,5 x 47,9 cm</b> (28.8 x 11.2 x 18.9 in)	
<b>Weight</b>		<b>Head Only</b>	<b>5,1 kg</b> (11.16 lb)	
		<b>Unpacked</b>	<b>7,66 kg</b> (16.89 lb)	

### Technical Specifications

**Packaged** **10 kg (22.1 lb)**

<b>Ergonomic Features</b>	<p><b>Detachable Stand</b></p> <p><b>Height Adjustment</b></p> <p><b>Tilt Range</b></p> <p><b>Swivel</b></p> <p><b>Pivot</b></p> <p><b>Quick Release<sup>5</sup></b></p>	<p>Yes, ships detached</p> <p>Yes, 130 +/-3 mm</p> <p>-5° to + 22° vertical</p> <p>Yes, 45° +/-2°</p> <p>Yes, 90°</p> <p>HP QR2 quick release included</p>
<b>Environmental</b>	<p><b>Temperature - Operating</b></p> <p><b>Temperature - Non-operating</b></p> <p><b>Humidity - Operating</b></p> <p><b>Humidity - Non-operating</b></p> <p><b>Altitude - Operating</b></p> <p><b>Altitude - Non-operating</b></p> <p><b>White LED Backlights</b></p> <p><b>CCFL Panel</b></p> <p><b>Arsenic-Free Display Glass</b></p> <p><b>Low Halogen<sup>2</sup></b></p> <p><b>Mercury-Free Display Backlighting</b></p>	<p><b>5° to 35° C</b> (41° to 95° F)</p> <p><b>-20° to 60° C</b> (-4° to 140° F)</p> <p>20% to 80% non-condensing</p> <p>5% to 95%, 38.7° C max wet-bulb</p> <p><b>0 to 5,000 m</b> (0 to 16,404 ft)</p> <p><b>0 to 12,192 m</b> (0 to 40,000 ft)</p> <p>Yes</p> <p>No</p> <p>Yes</p> <p>Yes (except cables)</p> <p>Yes</p>
<b>Options</b>	<p><b>HP LCD Speaker Bar</b>—Part number NQ576AA</p> <p><b>HP Single Monitor Arm</b>—Part number BT861AA</p> <p><b>HP DisplayPort Cable Kit</b>—Part number VN567AA</p> <p><b>HP Quick Release Bracket</b>—Part number EM870AA<sup>5</sup></p> <p><b>HP Business PC Security Lock Kit</b>—Part number PV606AA</p>	<p>Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs.</p> <p>The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 75 degrees of tilt, and 360 degrees of pan and rotation – all at your fingertips -- helping you stay comfortable and productive throughout the day.</p> <p>Connects a DisplayPort connector on an HP Business Desktop computer to a DisplayPort connector on a monitor</p> <p>An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.</p> <p>Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.</p>
<b>What's in the box?</b>	<b>Monitor and Accessories</b>	HP Z27n 27-inch Narrow Bezel IPS Display, AC power cord (1.8m) 5.9 ft, DisplayPort cable 1,8 m (5.9 ft), Mini-DisplayPort cable 1,8 m (5.9 ft), USB 3.0 cable 1,8 m (5.9 ft)

### Technical Specifications

	<b>Documentation</b>	CD (includes user guide, warranty, drivers)
	<b>Software</b>	HP Display Assistant
<b>Other</b>	<b>User Guide Languages</b>	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	<b>Warranty Languages</b>	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	<b>Color</b>	Black
	<b>VESA Mounting</b>	100 mm VESA mount
	<b>Security Lock-Ready</b>	Yes
	<b>Country of Origin</b>	China
<b>Certification and Compliance</b>		TCO Certified, CEL Grade 2, ENERGY STAR® Qualified, EPEAT® Gold <sup>3</sup> , CB; TUV/GS; TUV/Ergo; TUV-S; UL; TCO Edge; CCC; CECP; CEL; SEPA; BSMI; CE; FCC(Canada); BSMI; KC; VCCI; C-Tick; Microsoft WHQL Certification (Windows 8.1 and Windows 7); SmartWay Transport Partnership (NA)
<b>Compatibility</b>		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
<b>Service and Warranty</b>		Protected by HP, including a 3 year standard limited warranty. Optional HP Care Pack Services are extended service contracts that extend your protection beyond the standard warranties. <sup>4</sup>

© Copyright 2017 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

ENERGY STAR® and the ENERGY STAR® mark are registered trademarks of the U.S. Environmental Protection Agency.

1. MHL 2.0 port will charge a MHL compatible smart phone and tablet battery. Requires the smart phone or tablet to be enabled for MHL or have an HDMI dongle to connect to the monitor. See your mobile device specifications.
2. Power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
3. EPEAT® registered where applicable. EPEAT® registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status in your country.
4. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See <http://www.hp.com/go/cpc> for details.
5. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.
6. Depending on Graphics Card capability.

### *Change Log*

<b>Change Log</b>	