

Overview

HP EliteOne 1000 G1 All-in-One Business PC Displays¹

Displays^{1,2}

HP EliteOne 1000 23.8-in FHD Display	2SC22AA
HP EliteOne 1000 23.8-in FHD Touch Display	2SC23AA
HP EliteOne 1000 27-in 4K UHD Display	2SC24AA
HP EliteOne 1000 34-in WQHD Curved Display	2SC25AA



HP EliteOne 1000 23.8-in FHD
(Touch and Non-Touch)



HP EliteOne 1000 27-in 4K UHD



HP EliteOne 1000 34-in WQHD Curved


Note: HP EliteOne 1000 G1 All-in-One Business PC sold separately.

Overview



HP EliteOne 1000 Display - Front

- | | | | |
|----|------------------|----|---------------------------------|
| 1. | Webcam | 3. | On-screen display (OSD) buttons |
| 2. | Power status LED | | |

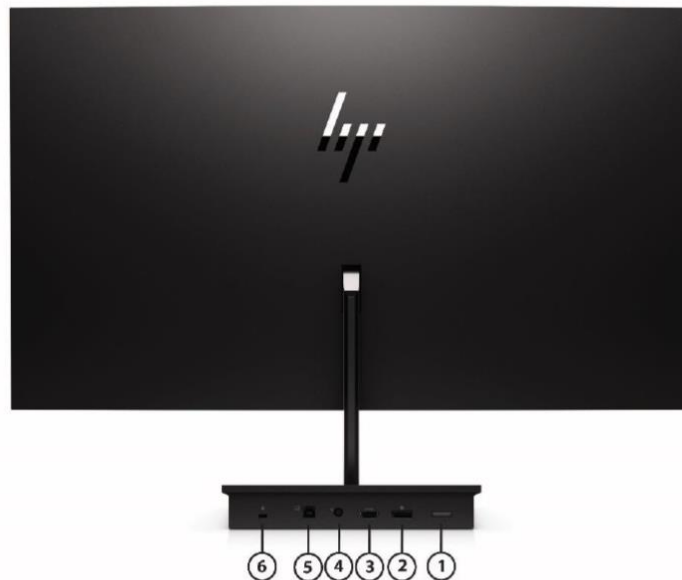

HP EliteOne 1000 Display - Rear

- | | | | |
|----|-----------------|----|----------------------|
| 1. | Power button | 4. | Power connector |
| 2. | DisplayPort™ in | 5. | RJ-45 (network) jack |
| 3. | HDMI in | 6. | Security lock slot |

Technical Specifications

Displays

HP EliteOne 1000 23.8-in FHD Display^{1,2}

Display Size (Diagonal)	23.8 in (60.45 cm)
Type	IPS WLED Backlit LCD
Touchscreen	No
Active area (mm)	527.04 x 296.46 mm
Native resolution (H x V)	1920 x 1080 ^{2,3}
Aspect ratio	16:9
Pixel pitch (H x V0 (mm))	0.2745 x 0.2745 mm
Contrast ratio (typical)	1000:1
Brightness (typical)	250 cd/m ²
Viewing angle (typical) (HxV)	178° x 178°
Backlight lamp life (to half brightness)	30,000 hours minimum
Color support	Over 16 million colors
Color gamut (typical)	NTSC 72%
Anti-glare	Yes
Default color temperature	Warm (6500K)
Response Time - Typical	Panel native 14ms
Color Gamut - Typical	NTSC 72%
Color Support	Up to 16.7 million colors with the use of FRC technology
Preset Graphic Modes/Supported Resolutions	640 x 480 @ 60Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz
Maximum Resolution	1920 x 1080 @ 60 Hz
Recommended Resolution	1920 x 1080 @ 60 Hz
Vertical Scan Range	50 - 60 Hz
Horizontal Scan Range	30 - 80 kHz
Default Color Temperature	SRGB(D65)
Maximum Pixel Clock Speed	170 MHz
Exterior Color of Monitor Bezel and Stand	Black head/base and Silver (Mirror Polish) arm
Plug & Play	Yes
Tilt	-5 to + 25 degrees
Swivel	No
Pivot	No
Security Lock Ready	Yes
Height Adjustment	Yes
Height Adjustment Range	40 mm

Technical Specifications

Detachable Base	No (no VESA mount capability and not operable without display base or compatible HP EliteOne 1000 AiO base)
Warranty	3/3/3
Webcam	2MP FHD webcam (standard); HP EliteOne 1000 IR and Dual-facing Webcam ⁹ (optional accessory)
On Screen Display User Controls	Brightness, Contrast, Color Control, Input Control, Image Control, Power Control, Menu Control, Management, Language, Information, Exit
User Programmable Modes	Yes, 10
Monitor Control Buttons or Switches	Menu, Minus ("-"), Plus ("+") /Input Control, OK/Auto, Power
Audio Controls	N/A
Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
VESA Mounting	No
HDMI	1 HDMI 1.4
MHL/HDMI	No
HDCP support	Yes (HDMI and DisplayPort™)
Audio	No
USB	1 USB Type-B out (webcam and mics) (mics integrated in webcam)
Card Reader	No
DisplayPort™ 1.2	1 DisplayPort™ 1.2
Video/audio cables included with lengths	HDMI 1.8m, DisplayPort™ 1.8 m, USB 2.0 1.8m
Power Supply	External
Power Source	65W EPS
Power Consumption – Maximum⁵	18w
Energy Saving/Standby Mode	0.34w
Power Consumption – Typical⁴	15w
Power Cable Length	1.8 m
Operating Temperature - Celsius	5° - 35°C
Operating Temperature - Fahrenheit	41° - 95°F
Non-operating Temperature - Celsius	-20° - 60°C
Non-operating Temperature - Fahrenheit	29° - 140°F
Operating Humidity - Relative Humidity	20% - 80% (non-condensing)
Non-operating Humidity	5% - 95%
Operating Altitude	0 - 5,000 m (16,400 ft.)
Non-operating Altitude	0 - 12.192 m (40,000 ft.)
Mercury-free LED display backlighting	Yes
Arsenic-Free Display Glass	Yes
Arsenic-Free Display Glass Low Halogen⁶	Yes

GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)

NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

Technical Specifications

Agency Approvals and Certifications	ENERGY STAR®, EPEAT® Registered Gold ⁷ , CEL Grade 1, TCO Certified, CE/CB/KC/KCC/ICES/CU/cULus/ISC/CCC/VCCI/FCC/BSMI/RCM/NRCS/Ukraine CoC+NSOC/BIS
Product Dimensions (Unpacked with stand) Metric (W x D x H cm)	53.95 x 18.76 x 42.09 cm
Product Dimensions (Unpacked with stand) Imperial (W x D x H in)	21.2 x 7.4 x 16.6 in
Product Dimensions (Packed) Metric (w x d x h cm)	65.7 x 24.8 x 53.9 cm
Product Dimensions (Packed) Imperial (w x d x h in)	25.87 x 9.76 x 21.22 in
Product Weight (Unpacked with stand) Metric	7.79 kg
Product Weight (Unpacked with stand) Imperial	17.2 lb
Product Weight (Packed) Metric	11.4 kg
Product Weight (Packed) Imperial	25.13 lb
Option kit contents	HP EliteOne 1000 23.8-in FHD Display External power supply (65W) (1.8m) 5.9 ft AC power cord (1m) HDMI cable (1.8m) 5.9 ft DisplayPort cable (1.8m) 5.9 ft USB Type-B cable (1.8m) 5.9 ft Installation guide 3-3-3 warranty document Product Notices for regulatory and safety TCO certificate
Compatibility	HP EliteOne 1000 G1 All-in-One Business PC

HP EliteOne 1000 23.8-in FHD Touch Display^{1,2}

Display Size (Diagonal)	23.8 in (60.45 cm)
Type	IPS WLED Backlit LCD
Touchscreen	Yes, Touch; Projected capacitive touch supports up to 10 touch-points
Active area (mm)	527.04 x 296.46 mm
Native resolution (H x V)	1920 x 1080 ^{2,3}
Aspect ratio	16:9
Pixel pitch (H x V0 (mm))	0.2745 x 0.2745 mm
Contrast ratio (typical)	1000:1
Brightness (typical)	250 cd/m ²
Viewing angle (typical) (HxV)	178° x 178°
Backlight lamp life (to half brightness)	30,000 hours minimum
Color support	Over 16 million colors
Color gamut (typical)	NTSC 72%
Anti-glare	Yes
Default color temperature	Warm (6500K)

Technical Specifications

Response Time - Typical	Panel native 14ms
Color Gamut - Typical	NTSC 72%
Color Support	Up to 16.7 million colors with the use of FRC technology
Preset Graphic Modes/Supported Resolutions	640 x 480 @ 60Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz
Maximum Resolution	1920 x 1080 @ 60 Hz
Recommended Resolution	1920 x 1080 @ 60 Hz
Vertical Scan Range	50 - 60 Hz
Horizontal Scan Range	30 - 80 kHz
Default Color Temperature	SRGB(D65)
Maximum Pixel Clock Speed	170 MHz
Exterior Color of Monitor Bezel and Stand	Black head/base and Silver (Mirror Polish) arm
Plug & Play	Yes
Tilt	-5 to + 25 degrees
Swivel	No
Pivot	No
Security Lock Ready	Yes
Height Adjustment	Yes
Height Adjustment Range	40 mm
Detachable Base	No (no VESA mount capability and not operable without display base or compatible HP EliteOne 1000 AiO base)
Warranty	3/3/3
Webcam	2MP FHD webcam (standard); HP EliteOne 1000 IR and Dual-facing Webcam ⁹ (optional accessory)
Touch Panel Type	Up to 10 Point Advanced In-Cell Touch, Self-Capacitive
Positional Accuracy	±1mm @ center, ≤2mm(Edge~ 3.5mm)
Touch Activation Force	N/A
Optical Light Transmission (per ASTM D1003)	100%
Electrostatic Projection (pr EN6100-4-2, 1955)	Air +/- 8kv
On Screen Display User Controls	Brightness, Contrast, Color Control, Input Control, Image Control, Power Control, Menu Control, Management, Language, Information, Exit
User Programmable Modes	Yes, 10
Monitor Control Buttons or Switches	Menu, Minus ("-"), Plus ("+") /Input Control, OK/Auto, Power
Audio Controls	N/A
Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)

Technical Specifications

VESA Mounting	No
HDMI	1 HDMI 1.4
MHL/HDMI	No
HDCP support	Yes (HDMI and DisplayPort™)
Audio	No
USB	1 USB Type-B out (webcam and mics) (mics integrated in webcam)
Card Reader	No
DisplayPort™ 1.2	1 DisplayPort™ 1.2
Video/audio cables included with lengths	HDMI 1.8m, DisplayPort™ 1.8 m, USB 2.0 1.8m
Power Supply	External
Power Source	65W EPS
Power Consumption – Maximum⁵	19w
Energy Saving/Standby Mode	0.34w
Power Consumption – Typical⁴	16w
Power Cable Length	1.8 m
Operating Temperature - Celsius	5° - 35°C
Operating Temperature - Fahrenheit	41° - 95°F
Non-operating Temperature - Celsius	-20° - 60°C
Non-operating Temperature - Fahrenheit	29° - 140°F
Operating Humidity - Relative Humidity	20% - 80% (non-condensing)
Non-operating Humidity	5% - 95%
Operating Altitude	0 - 5,000 m (16,400 ft.)
Non-operating Altitude	0 - 12.192 m (40,000 ft.)
Mercury-free LED display backlighting	Yes
Arsenic-Free Display Glass	Yes
Low Halogen⁶	Yes
GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)	
NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen.	
Service parts obtained after purchase may not be Low Halogen.	
Agency Approvals and Certifications	ENERGY STAR®, EPEAT® Registered Gold ⁷ , CEL Grade 1, TCO Certified, CE/CB/KC/KCC/ICES/CU/cULus/ISC/CCC/VCCI/FCC/BSMI/RCM/NRCS/Ukraine CoC+NSOC/BIS
Product Dimensions (Unpacked with stand) Metric (W x D x H cm)	53.95 x 18.76 x 42.09 cm
Product Dimensions (Unpacked with stand) Imperial (W x D x H in)	21.2 x 7.4 x 16.6 in
Product Dimensions (Packed) Metric (w x d x h cm)	65.7 x 24.8 x 53.9 cm
Product Dimensions (Packed) Imperial (w x d x h in)	25.87 x 9.76 x 21.22 in
Product Weight (Unpacked with stand) Metric (e.g. 3.65 kg)	7.86 kg

Technical Specifications

Product Weight (Unpacked with stand) Imperial (e.g. 8.03 lb)	17.3 lb
Product Weight (Packed) Metric (e.g. 6.5 kg)	11.4 kg
Product Weight (Packed) Imperial (e.g. 11 lb)	25.13 lb
Option kit contents	HP EliteOne 1000 23.8in FHD Touch Display External power supply (65W) (1.8m) 5.9 ft AC power cord (1m) HDMI cable (1.8m) 5.9 ft DisplayPort cable (1.8m) 5.9 ft USB Type-B cable (1.8m) 5.9 ft Installation guide 3-3-3 warranty document Product Notices for regulatory and safety TCO certificate
Compatibility	HP EliteOne 1000 G1 All-in-One Business PC

HP EliteOne 1000 27-in 4K UHD Display^{1,2}

Display Size (Diagonal)	27 in (68.58 cm)
Type	IPS WLED Backlit LCD
Touchscreen	No
Active area (mm)	596.74 x 335.66 mm
Native resolution (H x V)	3840 x 2160 ^{2,3}
Aspect ratio	16:9
Pixel pitch (H x V0 (mm))	0.1554 x 0.1554 mm
Contrast ratio (typical)	1000:1
Brightness (typical)	350 cd/m ²
Viewing angle (typical) (HxV)	178° x 178°
Backlight lamp life (to half brightness)	30,000 hours minimum
Color support	Over 1 billion colors
Color gamut (typical)	sRGB 99%
Anti-glare	Yes
Default color temperature	Warm (6500K)
Response Time - Typical	Panel native 14ms
Color Gamut - Typical	sRGB 99%
Color Support	Over 1 billion colors
Preset Graphic Modes/Supported Resolutions	640 x 480 @ 75Hz 720 x 400 @ 70 Hz 800 x 600 @ 75 Hz 1024 x 768 @ 75 Hz 1280 x 720 @ 60 Hz 1280 x 960 @ 60 Hz 1280 x 1024 @ 75 Hz

Technical Specifications

	1440 x 900 @ 60 Hz
	1680 x 1050 @ 60 Hz
	1920 x 1080 @ 60 Hz
	3840 x 2160 @ 60Hz
Maximum Resolution	3840 x 2160 @ 60 Hz
Recommended Resolution	3840 x 2160 @ 60 Hz
Vertical Scan Range	23 - 80 Hz
Horizontal Scan Range	30 - 160 kHz
Default Color Temperature	SRGB(D65)
Maximum Pixel Clock Speed	600 MHz
Exterior Color of Monitor Bezel and Stand	Black head/base and Silver (Mirror Polish) arm
Plug & Play	Yes
Tilt	-5 to + 25 degrees
Swivel	No
Pivot	No
Security Lock Ready	Yes
Height Adjustment	No
Height Adjustment Range	N/A
Detachable Base	No (no VESA mount capability and not operable without display base or compatible HP EliteOne 1000 AiO base)
Warranty	3/3/3
Webcam	2MP FHD webcam (standard); HP EliteOne 1000 IR and Dual-facing Webcam ⁹ (optional accessory)
On Screen Display User Controls	Brightness, Contrast, Color Control, Input Control, Image Control, Power Control, Menu Control, Management, Language, Information, Exit
User Programmable Modes	Yes, 10
Monitor Control Buttons or Switches	Menu, Minus ("−"), Plus ("+") /Input Control, OK/Auto, Power
Audio Controls	N/A
Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
VESA Mounting	No
HDMI	1 HDMI 2.0
MHL/HDMI	No
HDCP support	Yes (HDMI and DisplayPort™)
Audio	No
USB	1 USB Type-B out (webcam and mics) (mics integrated in webcam)
Card Reader	No
DisplayPort™ 1.2	1 DisplayPort™ 1.2
Video/audio cables included with lengths	HDMI 1.8m, DisplayPort™ 1.8 m, USB 2.0 1.8m
Power Supply	External
Power Source	65W EPS
Power Consumption – Maximum⁵	18w
Energy Saving/Standby Mode	0.34w
Power Consumption – Typical⁴	15w
Power Cable Length	1.8 m
Operating Temperature - Celsius	5° - 35°C

Technical Specifications

Operating Temperature - Fahrenheit	41° - 95°F
Non-operating Temperature - Celsius	-20° - 60°C
Non-operating Temperature - Fahrenheit	29° - 140°F
Operating Humidity - Relative Humidity	20% - 80% (non-condensing)
Non-operating Humidity	5% - 95%
Operating Altitude	0 - 5,000 m (16,400 ft.)
Non-operating Altitude	0 - 12.192 m (40,000 ft.)
Mercury-free LED display backlighting	Yes
Arsenic-Free Display Glass	Yes
Low Halogen⁶	Yes
GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)	
NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.	
Agency Approvals and Certifications	ENERGY STAR®, EPEAT® Registered Gold ⁷ , CEL Grade 1, TCO Certified, CE/CB/KC/KCC/ICES/CU/cULus/ISC/CCC/VCCI/FCC/BSMI/RCM/NRCS/Ukraine CoC+NSOC/BIS
Product Dimensions (Unpacked with stand) Metric (W x D x H cm)	61.35 x 18.76 x 45.81 cm
Product Dimensions (Unpacked with stand) Imperial (W x D x H in)	24.2 x 7.4 x 18 in
Product Dimensions (Packed) Metric (w x d x h cm)	74.1 x 24.3 x 57.2 cm
Product Dimensions (Packed) Imperial (w x d x h in)	29.17 x 9.57 x 22.52 in
Product Weight (Unpacked with stand) Metric	9.86 kg
Product Weight (Unpacked with stand) Imperial	21.7 lb
Product Weight (Packed) Metric (14.05 kg
Product Weight (Packed) Imperial	30.97 lb
Option kit contents	HP EliteOne 1000 27-in 4K UHD Display External power supply (65W) (1.8m) 5.9 ft AC power cord (1mm) HDMI cable (1.8m) 5.9 ft DisplayPort cable (1.8m) 5.9 ft USB Type-B cable (1.8m) 5.9 ft Installation guide 3-3-3 warranty document Product Notices for regulatory and safety TCO certificate
Compatibility	HP EliteOne 1000 G1 All-in-One Business PC

Technical Specifications

HP EliteOne 1000 34-in WQHD Curved Display^{1,2}

Display Size (Diagonal)	34 in (86.36 cm)
Type	IPS WLED Backlit LCD
Touchscreen	No
Active area (mm)	799.80 x 334.8 mm
Native resolution (H x V)	3440 x 1440 ^{2,3}
Aspect ratio	21:9
Pixel pitch (H x V0 (mm))	0.2325 x 0.2325 mm
Contrast ratio (typical)	1000:1
Brightness (typical)	300 cd/m ²
Viewing angle (typical) (HxV)	178° x 178°
Backlight lamp life (to half brightness)	30,000 hours minimum
Color support	Over 1 billion colors
Color gamut (typical)	sRGB 99%
Anti-glare	Yes
Default color temperature	Warm (6500K)
Response Time - Typical	Panel native 14ms
Color Gamut - Typical	sRGB 99%
Color Support	Over 1 billion colors
Preset Graphic Modes/Supported Resolutions	640 x 480 @ 75Hz 720 x 400 @ 70 Hz 800 x 600 @ 75 Hz 1024 x 768 @ 75 Hz 1280 x 720 @ 60 Hz 1280 x 960 @ 60 Hz 1280 x 1024 @ 75 Hz 1440 x 900 @ 75 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz 3440 x 1440 @ 60Hz
Maximum Resolution	3440 x 1440 @ 60 Hz
Recommended Resolution	3440 x 1440 @ 60 Hz
Vertical Scan Range	23 - 80 Hz
Horizontal Scan Range	30 - 160 kHz
Default Color Temperature	SRGB (D65)
Maximum Pixel Clock Speed	600 MHz
Exterior Color of Monitor Bezel and Stand	Black head/base and Silver (Mirror Polish) arm
Plug & Play	Yes
Tilt	0 to + 20 degrees
Swivel	No
Pivot	No
Security Lock Ready	Yes
Height Adjustment	No
Height Adjustment Range	N/A

Technical Specifications

Detachable Base	No (no VESA mount capability and not operable without display base or compatible HP EliteOne 1000 AiO base)
Warranty	3/3/3
Webcam	2MP FHD webcam (standard); HP EliteOne 1000 IR and Dual-facing Webcam ⁹ (optional accessory)
On Screen Display User Controls	Brightness, Contrast, Color Control, Input Control, Image Control, Power Control, Menu Control, Management, Language, Information, Exit
User Programmable Modes	Yes, 10
Monitor Control Buttons or Switches	Menu, Minus ("-"), Plus ("+") /Input Control, OK/Auto, Power
Audio Controls	N/A
Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
VESA Mounting	No
HDMI	1 HDMI 2.0
MHL/HDMI	No
HDCP support	Yes (HDMI and DisplayPort™)
Audio	No
USB	1 USB Type-B out (webcam and mics) (mics integrated in webcam)
Card Reader	No
DisplayPort™ 1.2	1 DisplayPort™ 1.2
Video/audio cables included with lengths	HDMI 1.8m, DisplayPort™ 1.8 m, USB 2.0 1.8m
Power Supply	External
Power Source	65W EPS
Power Consumption – Maximum⁵	54w
Energy Saving/Standby Mode	0.37w
Power Consumption – Typical⁴	35w
Power Cable Length	1.8 m
Operating Temperature - Celsius	5° - 35°C
Operating Temperature - Fahrenheit	41° - 95°F
Non-operating Temperature - Celsius	-20° - 60°C
Non-operating Temperature - Fahrenheit	29° - 140°F
Operating Humidity - Relative Humidity	20% - 80% (non-condensing)
Non-operating Humidity	5% - 95%
Operating Altitude	0 - 5,000 m (16,400 ft.)
Non-operating Altitude	0 - 12.192 m (40,000 ft.)
Mercury-free LED display backlighting	Yes
Arsenic-Free Display Glass	Yes
Low Halogen⁶	Yes
GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR, PVC)	
NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen.	
Service parts obtained after purchase may not be Low Halogen.	
Agency Approvals and Certifications	CEL Grade 1, TCO Certified, CE/CB/KC/KCC/ICES/CU/cULus/ISC/CCC/VCCI/FCC/BSMI/RCM/NRCS/Ukraine CoC+NSOC/BIS

Technical Specifications

Product Dimensions (Unpacked with stand) Metric (W x D x H cm)	81.58 x 18.76 x 45.9 cm
Product Dimensions (Unpacked with stand) Imperial (W x D x H in)	32.1 x 7.4 x 18.1 in
Product Dimensions (Packed) Metric (w x d x h cm)	98.5 x 29.2 x 60.8 cm
Product Dimensions (Packed) Imperial (w x d x h in)	38.78 x 11.5 x 23.94 in
Product Weight (Unpacked with stand) Metric (e.g. 3.65 kg)	9.88 kg
Product Weight (Unpacked with stand) Imperial (e.g. 8.03 lb)	22.8 lb
Product Weight (Packed) Metric (e.g. 6.5 kg)	15.51 kg
Product Weight (Packed) Imperial (e.g. 11 lb)	34.19 lb
Option kit contents	HP EliteOne 1000 34-in WQHD Curved Display External power supply (65W) (1.8m) 5.9 ft AC power cord (1mm) HDMI cable (1.8m) 5.9 ft DisplayPort cable (1.8m) 5.9 ft USB Type-B cable (1.8m) 5.9 ft Installation guide 3-3-3 warranty document Product Notices for regulatory and safety TCO certificate
Compatibility	HP EliteOne 1000 G1 All-in-One Business PC

Service and support⁸

Your Option Limited Warranty is a one (3) year (HP Option Limited Warranty Period) parts replacement warranty on any HP-branded or Compaq-branded options (HP Options). If your HP Option is installed in an HP Hardware Product, HP may provide warranty service either for the HP Option Limited Warranty Period or the remaining Limited Warranty Period of the HP Hardware Product in which the HP Option is being installed, whichever period is the longer but not to exceed three (3) years from the date you purchased the HP Option.

Other Accessories⁹

HP EliteOne 1000 IR and Dual-facing Webcam	ZHW55AA
HP Business PC Security Lock Kit	N3R93AA

1. HP EliteOne 1000 G1 All-in-One Business PC sold separately.
2. HD content required to view HD images.
3. Resolutions are dependent upon monitor capability, and resolution and color depth settings.
4. Default Power is measured with factory defaults, including factory default brightness and USB ports loaded at 25% of maximum.
5. Maximum Power is measured with monitor at maximum brightness and with USB ports loaded at 100% of maximum.
6. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

Technical Specifications

7. EPEAT® registered where applicable. EPEAT registration varies by country. See www.epeat.net for registration status by country. Search keyword generator on HP's 3rd party option store for solar energy accessory at www.hp.com/go/options.”
8. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See www.hp.com/go/cpc for details.
9. Sold separately. See product QuickSpecs for exact device and display compatibility.

NOTE: All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower

© Copyright 2017 HP Development Company, L.P. All rights reserved.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Summary of Changes

Date of change:	Version History:	Description of change:
	V1 to V2	