


### Overview


### HP ZBook 15 G2 Mobile Workstation

FRONT VIEW

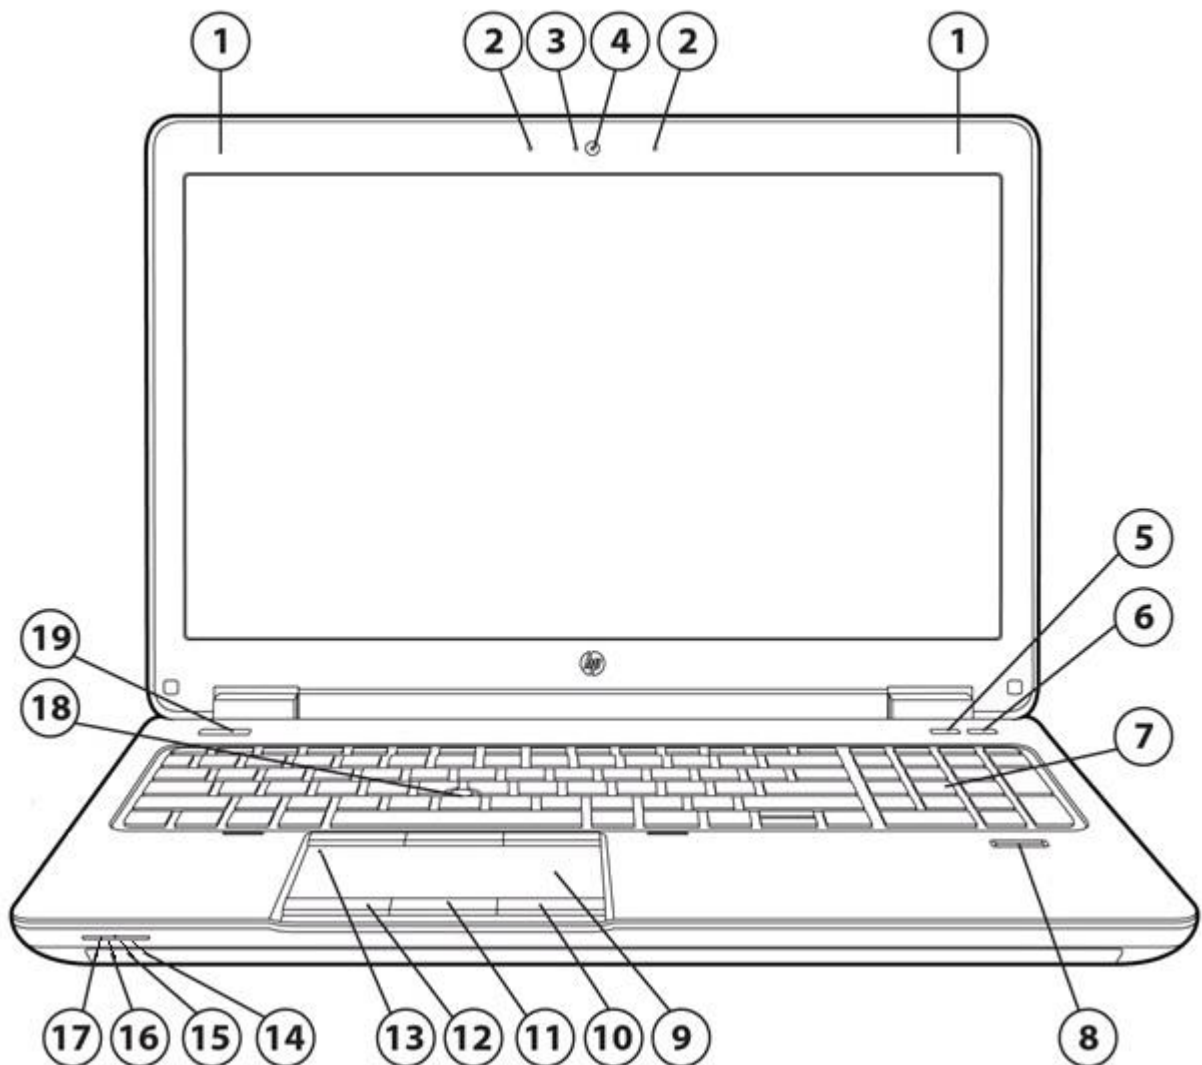

- |  |                                     |
|--|-------------------------------------|
| 1. WLAN antennas (2)                       | 11. Center Touchpad button          |
| 2. Internal microphones (2)                | 12. Left Touchpad button            |
| 3. Webcam light (with webcam)              | 13. Touchpad on/off button with LED |
| 4. Webcam                                  | 14. Hard drive light                |
| 5. Wireless button                         | 15. AC adapter/Battery light        |
| 6. Volume mute button                      | 16. Power light                     |
| 7. Numeric keypad                          | 17. Wireless light                  |
| 8. Fingerprint reader (select models only) | 18. Pointstick                      |
| 9. Touchpad with scroll zone               | 19. Power button                    |
| 10. Right Touchpad button                  |                                     |

### Overview

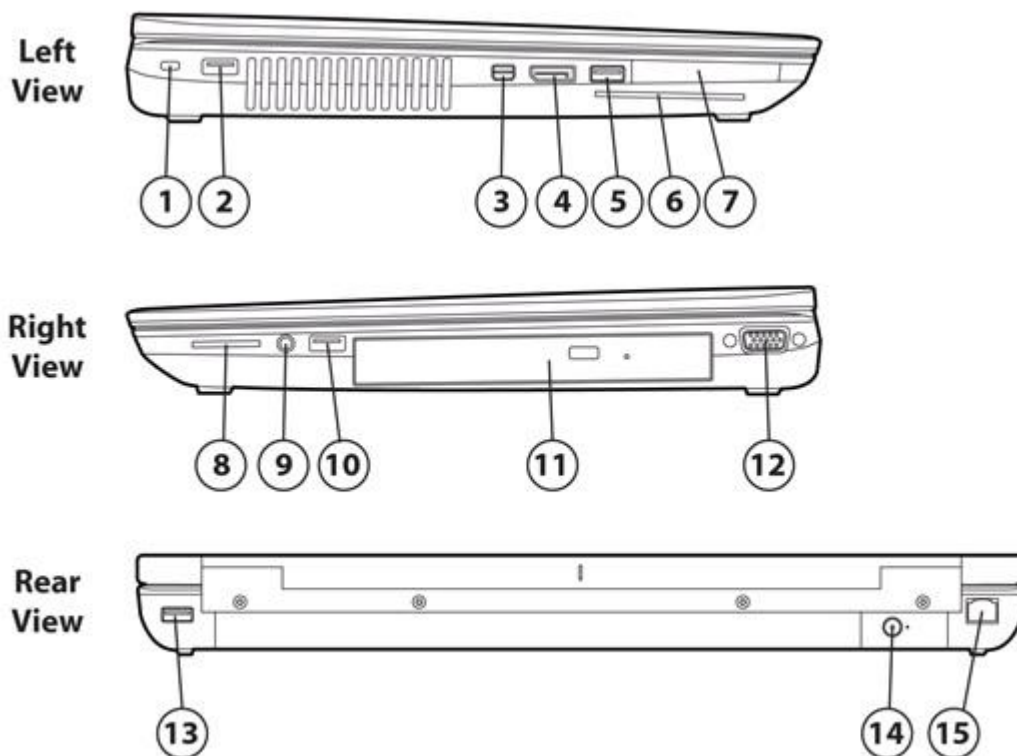

1. Security cable slot
2. USB 2.0 port
3. Thunderbolt™ 2 port\*
4. DisplayPort
5. USB 3.0 charging port
6. Smart card reader
7. ExpressCard port
8. Memory card reader
9. Audio-out (headphone) jack/Audio in (microphone) jack
10. USB 3.0 port
11. Optical drive (select models only)
12. External monitor port
13. USB 3.0 port
14. Power connector
15. RJ-45 (network) jack/lights (2)

\* Thunderbolt is new technology. Install all the latest drivers for your Thunderbolt device before connecting the device to the Thunderbolt port. Thunderbolt cable and Thunderbolt device (sold separately) must be compatible with Windows. To determine whether your device is Thunderbolt Certified for Windows, see <https://thunderbolttechnology.net/products>.

### Overview

#### At A Glance

- Windows 8.1 versions, Windows 7 versions, Ubuntu Linux, or FreeDOS
- Thin and light form factor and industrial design. Durable HP Duracase with magnesium-reinforced chassis, HP DuraFinish with brushed aluminum on top cover and smooth aluminum around top, right, and left sides chassis with hematite /graphite color, HP DisplaySafe frame, latch-less design with precision aluminum-alloy hinges, backlight keyboard in full aluminum deck, chemically strengthened glass touchpad, and updated system functions indicators
- Designed to pass MIL STD 810G testing\*
- Workstation-caliber NVIDIA® Quadro® discrete graphics: NVIDIA Quadro K610M (1GB GDDR5), NVIDIA Quadro K1100M (2GB GDDR5), AMD FirePro™ W5170M (2GB GDDR5), NVIDIA Quadro K2100M (2GB GDDR5); NVIDIA Optimus or AMD Enduro™ technology enabled for improved battery life.
- ISV certified to provide fast and reliable performance with workstation applications, including manipulation of 3D textures
- Choice of 4th generation Intel® Core™ i7 and i5 processors
- Intel Core i7 with vPro and Core i5 with vPro technology (optional) \*\*\*\*
- Intel Smart Response Technology support for higher system performance with a hard drive
- HP Performance Advisor for optimal configuration, compatibility and performance
- Up to four SODIMMs on configurations with quad-core processor, for system memory up to 32 GB
- Supports multi-display, including up to four without a docking station (both with and without hybrid graphics enabled), up to four with HP Advanced Docking Station (sold separately) without hybrid graphics enabled and up to five with HP Advanced Docking Station (sold separately) and hybrid graphics enabled
- New Thunderbolt 2 port\*\* for high speed data/video/audio transfer support
- Thunderbolt 2 port can be connected to monitors supporting DisplayPort 1.2 to achieve HBR2 and MST functionality.
- DTS Studio Sound HD audio optimized for high fidelity audio with immersive surround sound with deep, rich bass and crystal clear dialog without distortion at high volume
- Choice of battery solutions: 8-cell (83 WHr) or 8-cell (75 WHr) HP Long Life Battery, combined with optional external batteries for extended life.
- 2 discrete buttons with LED indicator for convenient one touch access - Wireless On/Off, Volume Mute
- Widescreen 15.6-inch diagonal anti-glare LED-backlit display:  
HD (1920x1080) eDP with standard viewing angle, FHD (1920x1080) eDP with PSR (Panel Self Refresh) with ultrawide viewing angle, QHD+ (3200x1800) eDP with ultrawide viewing angle or FHD ultrawide viewing angle with HP DreamColor Technology
- Upgrade Bay for optional second hard drive or weight saver
- Flexible wireless connectivity options:
  - Intel Dual Band Wireless-N 7260 802.11 a/b/g/n (2x2) WiFi ; Intel Dual Band Wireless-AC 7260 802.11 a/b/g/n/ac (2x2) WiFi and Bluetooth 4.0 combo; Intel Dual Band Wireless-AN 7260 802.11 a/b/g/n (2x2) WiFi and Bluetooth 4.0 combo
  - Optional integrated wireless 3G or 4G (LTE) mobile broadband module support
- Choice of tool free capable, user-removable hard drive up to 1 TB with HP 3D DriveGuard protection, or SATA 6 Gb/s 128/180/240/256/512\*\*\* GB Solid State Drive, 256 GB Z Turbo Drive (PCIe SSD)
- Security features including HP Client Security Manager, managed via single console
- Low halogen\*\*\*
- HP BIOS technology, including HP Sure Start to identify and recover from known and unknown BIOS attacks.

\* MIL STD 810G testing is pending and testing is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

\*\* Thunderbolt is new technology. Install all the latest drivers for your Thunderbolt device before connecting the device to the Thunderbolt port. Thunderbolt cable and Thunderbolt device (sold separately) must be compatible with Windows. To determine whether your device is Thunderbolt Certified for Windows, see <https://thunderbolttechnology.net/products>.

\*\*\* External power supplies, power cords, cables and peripherals are not low halogen. Service parts obtained after purchase may not be low halogen.

### Overview

\*\*\*\* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing system required. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance. Some vPro functionality, such as Intel® Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependent on 3rd party software providers. Microsoft Windows required.

### Features

#### OPERATING SYSTEM

##### Preinstalled

Windows 8.1 Pro 64\*  
Windows 7 Professional 64 (available through downgrade rights from Windows 8.1 Pro)\*\*  
Windows 8.1 64\*  
Windows 7 Professional 64\*\*  
Ubuntu Linux\*\*\*  
FreeDOS

##### Supported

Windows 8.1 Enterprise 64\*  
Windows 7 Enterprise 64\*\*

##### Certified

\* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. See <http://www.microsoft.com> for details.

\*\* This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

\*\*\* Not available with WWAN

#### PROCESSOR\*

4<sup>th</sup> Generation Intel® Core™ i7-4910MQ (2.9 GHz, 1600MHz, 8 MB L3 cache, 4 cores, 47W)\*  
Up to 3.90 GHz with Intel Turbo Boost Technology  
4<sup>th</sup> Generation Intel® Core™ i7-4810MQ (2.8 GHz, 1600MHz, 6 MB L3 cache, 4 cores, 47W)\*  
Up to 3.80 GHz with Intel Turbo Boost Technology  
4<sup>th</sup> Generation Intel® Core™ i7-4710MQ (2.5 GHz, 1600MHz, 6 MB L3 cache, 4 cores, 47W) (no vPro support)\*  
Up to 3.50 GHz with Intel Turbo Boost Technology  
4<sup>th</sup> Generation Intel® Core™ i7-4610M (3.00 GHz, 1600 MHz, 4 MB L3 Cache, 2 cores, 37W)  
Up to 3.70 GHz with Intel Turbo Boost Technology  
4<sup>th</sup> Generation Intel® Core™ i5-4340M (2.90 GHz, 1600 MHz, 3 MB L3 Cache, 2 cores, 37W)  
Up to 3.60 GHz with Intel Turbo Boost Technology  
Intel Dual-Core i5-4210M (3.20 GHz, 1600 MHz, 3 MB L3 Cache, 4 threads, 37W)  
Up to 3.20 GHz with Intel Turbo Boost Technology

\* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing system required. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

**NOTE:** NVIDIA Optimus is enabled by default. If you choose to disable this functionality, Intel® integrated graphics will not be used.

#### CHIPSET

Mobile Intel® QM87

#### INTEL® CORE™ I5 WITH VPRO/CORE™ I7 WITH VPRO TECHNOLOGY CAPABLE

Intel Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with select processors, a qualified Intel Centrino® WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology 9.0 (iAMT) offers built-in manageability and proactive security for networked mobile workstations, even when they are powered off\* or when the operating system is inoperable. It can help identify threats before they reach

### Features

the network, isolate infected systems, and update mobile workstations regardless of their power state.

\*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

**NOTE:** Some functionality of Intel Core i5 with vPro/Core i7 with vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional third-party software in order to run. Availability of future "virtual appliances" applications for Intel Core i5 with vPro/Core i7 with vPro technology is dependent on third-party software providers. Compatibility with future "virtual appliances" is yet to be determined.

### GRAPHICS

NVIDIA Quadro K610M with 1 GB dedicated GDDR5 video memory  
Microsoft DirectX 11.1 (Shader Model 5.0) and OpenGL 4.2 capable  
NVIDIA Quadro K1100M with 2 GB dedicated GDDR5 video memory  
Microsoft DirectX 11.1 (Shader Model 5.0) and OpenGL 4.2 capable  
AMD FirePro™ W5170M with 2 GB dedicated GDDR5 video memory  
Microsoft DirectX 11.1 (Shader Model 5.0) and OpenGL 4.2 capable  
NVIDIA Quadro K2100M with 2 GB dedicated GDDR5 video memory  
Microsoft DirectX 11.1 (Shader Model 5.0) and OpenGL 4.2 capable

NVIDIA Optimus Technology and AMD Enduro™ Technology supported

**NOTE:** NVIDIA Quadro mobile professional graphics support up to five independent displays when using an HP Advanced Docking station (sold separately). AMD FirePro™ professional graphics support up to five independent displays when using an HP Advanced Docking station (sold separately).

#### Multi-Display Support

Without Docking Station:

HP ZBook 15 without the use of a Docking Station supports up to a maximum of four independent displays. These four displays are the internal panel plus three external displays connected to the VGA, the DisplayPort (DP), and the Thunderbolt™ Port connectors.

With Docking Station\*:

The Advanced Docking Station has VGA and four digital display output connectors (two DVI and two DP). Of those four digital display connectors, only two may be used at a time (two DVI, two DP or one DP and one DVI). When used together with the HP ZBook 15, a maximum of five independent displays are supported. These five displays are the internal panel plus four external displays connected to three display outputs connectors from the standard or Advanced Docking Station\*, and the Thunderbolt™ connector from the ZBook.

DP 1.2 "daisy-chain" feature:

On HP ZBook 15, the maximum number of independent displays is increased to six with the use of DP1.2 "daisy-chain" feature. This requires Hybrid Graphics to be enabled, one monitor connected to the dock VGA, and at least one daisy chain connection on (A) System DP, (B) Docking Station DP 1, (C) Docking Station DP 2.

\* Advanced docking station sold separately.

### DISPLAY

#### Internal

15.6" diagonal LED-backlit FHD SVA eDP anti-glare (1920 x 1080)

15.6" diagonal LED-backlit FHD UWVA IPS eDP anti-glare + Panel Self Refresh (PSR) (1920 x 1080)

15.6" diagonal LED-backlit QHD+ UWVA IPS eDP anti-glare (3200 x 1800)

### Features

#### External

Up to 32-bit per pixel color depth

#### Thunderbolt™ 2\*

Supported as part of the daisy chain connected with Intel approved thunderbolt cables. For additional information, please visit <https://thunderbolttechnology.net/>.

#### Thunderbolt™ Features

- Legacy : DP 1.1a, DVI-A/D, HDMI and VGA displays attached to the end of the thunderbolt daisy chain via Intel certified dongles
- DP 1.2 redrive: DisplayPort monitors capable of supporting DP 1.2 may be directly attached to the Thunderbolt port to achieve HBR2 and MST functionality.
- DP display with miniDP connector may be attached directly to TB (Thunderbolt) port.
- DP display with standard DP connector and other legacy displays (HDMI, DVI, VGA) may be attached to TB with the use of a dongle.
- DP1.2 MST feature ("daisy-chain" feature) is supported through TB port.

\* Thunderbolt™ 2 is new technology. Install all the latest drivers for your Thunderbolt device before connecting the device to the Thunderbolt port. Thunderbolt cable and Thunderbolt device (sold separately) must be compatible with Windows. To determine whether your device is Thunderbolt Certified for Windows, see <https://thunderbolttechnology.net/products>.

#### DisplayPort w/MST (Multi-stream Transport)

Supports resolutions up to QFHD 3840 x 2160, 24/30-bit color depth at 60 Hz, and WUXGA (1920 x 1200) monitors, 24/30-bit color depth at 120 Hz.

#### DisplayPort Feature

- Multi-stream Transport (MST): Multi-stream Transport is a DP 1.2 feature that allows daisy chaining of DP 1.2 monitors (requires built in support of DP 1.2 MST in monitor), or the use of DP 1.2 hubs with MST to achieve 4 active displays without a docking station.

#### VGA

Port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz

#### DVI-D (single link)

Video signal available through DVI port in optional HP Docking Station (sold separately), as well as through DisplayPort to DVI-D; DisplayPort to DVI-D (dual link); and DisplayPort to HDMI adapters.

Supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking

**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

## STORAGE AND DRIVES

#### Z Turbo Drive Storage Bay

256 GB Z Turbo Drive (PCIe Solid State Drive)

#### Primary Storage Bay

#### Hard Drives\*

500/750 GB, 1 TB 7200 rpm SMART SATA II

### Features

500 GB 7200 rpm SMART SATA II Self Encrypting Drive  
500 GB 5400 rpm SMART SATA II Self Encrypting Drive FIPS 140-2 compliant

#### HP 3D DriveGuard (Windows only)

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.

#### Solid State Drive\*

128/180/240/256/512 GB SATA 6 Gb/sec

**\*NOTE:** For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) of system and up to 30 GB (for Windows 8) disk is reserved for system recovery software.

### DRIVE CONTROLLERS

Primary drive and upgrade bay: SATA-3 or SATA-2 for HDD and SATA-3 for SSD  
Z Turbo Drive: PCIe SSD  
RAID: 0 and 1 supported

### OPTICAL DRIVES

#### Fixed 9.5 mm SATA optical drive

Blu-ray R/RE DVD+/-RW SuperMulti DL Drive\*,\*\*  
Blu-ray ROM DVD+/-RW SuperMulti DL Drive\*,\*\*  
DVD+/-RW SuperMulti DL Drive\*\*

\*With Blu-Ray, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played.

\*\*Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players. The DVD-RAM cannot read or write to 2.6GB Single Sided/5.2 GB Double Sided – Version 1.0 media.

#### Second hard drive

750 GB 7200 rpm SMART SATA II Hard Drive  
512 GB SATA 6 Gb/sec Solid State Drive  
256 GB SATA 6 Gb/sec Self Encrypting Drive  
RAID 0 and 1 supported

#### Weight saver

### MEMORY

#### Standard

DDR3L 1.35V SDRAM (1600 MHz)  
Two SODIMM slots (Dual-core processor) or four SODIMM slots (Quad-core processor) supporting dual-channel memory



### Features

2 GB, 4 GB, and 8 GB SODIMMs

#### Maximum

Upgradeable to 16384 MB with optional 8192 MB SODIMMs in both slots (Dual-core processor)

Upgradeable to 32768 MB with optional 8192 MB SODIMMs in all 4 slots (Quad-core processor)

#### Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Maximum memory capacities assume Windows 64-bit operating systems or Linux.

## NETWORKING/COMMUNICATIONS

### Wireless

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Optional broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth® is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

### Mobile Broadband options

HP hs3110 HSPA+ Mobile Module

HP lt4112 LTE/HSPA+ Qualcomm® Gobi™ 4G Module

HP lt4211 LTE/EV-DO/HSPA+ Gobi 4G Module

### All 802.11 integrated wireless LAN options

Intel Dual Band Wireless-NB 7260 802.11 a/b/g/n (2x2) WiFi

Intel Dual Band Wireless-AC 7260 802.11 a/b/g/n/ac (2x2) WiFi and Bluetooth 4.0 combo

Intel Dual Band Wireless-AN 7260 802.11 a/b/g/n (2x2) WiFi and Bluetooth 4.0 combo

### Communications

Integrated Intel® I217-LM Gigabit\*\* Network Connection (vPro configurations)

\* Broadband wireless is an optional feature and requires separately purchased service contract. Check with your local vendor for coverage area and availability in your area. Connection and speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products, in all regions.

\*\* The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

\*\*\* Integrated Intel® Wi-Di feature is available on select configurations only and requires separately purchased projector, tv or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, tv or computer monitor via a standard HDMI cable, also sold separately.

\*\*\*\*802.11 requires access point and internet service. Availability of public wireless access points limited.

**NOTE:** WWAN is not available with DreamColor displays.

## AUDIO/MULTIMEDIA

### Audio

### Features

DTS Studio Sound HD audio (Windows OS only)  
Integrated stereo speakers  
Integrated microphone (dual-microphone array when equipped with optional webcam)  
Button for volume mute; function keys for volume up and down  
Combo mic-in / stereo headphone-out jack

#### **Webcam**

Optional 720p HD webcam

- HD format (widescreen)
- Supports videoconferencing and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range

### KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

#### **Keyboard**

Optional backlit keyboard with Function key control to toggle backlit brightness setting - off/full/half brightness  
The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, function keys, and 19.05 x 19.05 mm key pitch (center-to-center spacing). U.S. and International key layouts are available. Other features include hot keys for instant access to power conservation and brightness.

#### **Pointing Devices**

Touchpad with On/Off button, two-way scroll, gestures, three pick buttons  
Pointstick with three additional pointstick buttons  
Image sensor touchpad for enhanced performance and improved precision on scroll and gesture

#### **Buttons and Function Keys**

Separate launch buttons provide easy access to the following features: wireless on/off, volume mute. Function keys provide control of the following features: standby mode, external display, volume down, volume up, HP Power Assistant (Windows 7 only), and display brightness.

### SOFTWARE AND SECURITY

#### **Preinstalled Software with Windows Operating System**

##### **Windows 8**

#### **Security**

HP Device Access Manager with Just In Time Authentication  
DigitalPersona Fingerprint Driver  
HP Drive Encryption<sup>1</sup>  
HP File Sanitizer<sup>2</sup>  
HP Client Security Manager  
HP SpareKey  
Microsoft Defender

##### **Windows 7**

#### **Security**

HP Device Access Manager with Just In Time Authentication  
HP Drive Encryption  
HP File Sanitizer  
HP Client Security Manager  
HP SpareKey  
Microsoft Security Essentials  
Validity Fingerprint Driver

### Features

Validity Fingerprint Driver

#### BIOS Features

Absolute Persistence Module<sup>3</sup>  
HP Sure Start  
HP Automatic Drive Lock<sup>4</sup>  
HP BIOS Protection  
HP Disk Sanitizer (Not for SSD)<sup>5</sup>  
HP DriveLock<sup>6</sup>  
HP SpareKey  
Hybrid Boot  
Master Boot Record Security  
Measured Boot  
Power On Authentication  
Pre-Boot Security  
Secure Boot  
Secure Erase (SSD & HDD)<sup>7</sup>  
BIOS Update via Network

#### MultiMedia

Cyberlink Power2Go  
Cyberlink PowerDVD

#### HP Value Add

Getting Started with Windows 8  
HP 3D DriveGuard<sup>8</sup>  
HP ePrint Driver<sup>9</sup>  
HP Hotkey Support  
HP Manageability  
HP PageLift App<sup>10</sup>  
HP Support Assistant  
Box 50GB Offer<sup>11</sup>  
Foxit PhantomPDF *Express* for HP  
Skype

#### Microsoft Products

Buy Office

#### Additional Software Available from the Web

HP SoftPaq Download Manager  
HP Software System Manager

#### Workstation ISV Certifications

See the latest list of certifications at: <http://www.hp.com/united-tates/campaigns/workstations/partnerships.html>

#### HP Remote Graphics Software

The remote desktop solution for serious workstation users and their most demanding applications.  
Download at: [www.hp.com/go/RGS](http://www.hp.com/go/RGS)

#### BIOS Features

Absolute Persistence Module  
HP Sure Start  
HP Automatic Drive Lock  
HP BIOS Protection  
HP Disk Sanitizer (Not for SSD)  
HP DriveLock  
HP SpareKey  
Hybrid Boot  
Master Boot Record Security  
Measured Boot  
Power On Authentication  
Pre-Boot Security  
Secure Erase (SSD & HDD)  
BIOS Update via Network

#### MultiMedia

Cyberlink Power2Go  
Cyberlink PowerDVD  
Cyberlink YouCam BE

#### HP Value Add

HP 3D DriveGuard  
HP ePrint Driver  
HP Hotkey Support  
HP Manageability  
HP PageLift  
HP Recovery Manager  
HP Support Assistant  
HP Recovery Disc Creator (HPRDC)  
Box 50GB  
Foxit PhantomPDF *Express* for HP  
Skype

#### Microsoft Products

Buy Office

### Features

**NOTE:** HP Remote Graphics Software will not be available for Windows 8.1 at launch.

#### HP Performance Advisor

HP Performance Advisor enables optimal configuration of HP Mobile Workstations delivering stability and best performance. HP Performance Advisor will guide your system setup allowing a "custom" configuration that best matches the workstation to user requirements.

Download at: [www.hp.com/go/performanceadvisor](http://www.hp.com/go/performanceadvisor)

#### HP Recovery Manager

Models shipped with Windows 7 include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 36 GB (for Windows 7) of system and up to 36 GB (for Windows 8) disk is reserved for system recovery software.

#### Security

See Software section above.

#### Other Standard Security Features

Integrated Smart Card Reader

HP Spare Key (requires initial user setup)

One-Step Logon

Common Criteria EAL4+ Augmented Certified Discrete TPM 1.2 Embedded Security Chip

Security lock slot

Support for Intel AT<sup>12</sup>

#### Optional Security Features

HP Fingerprint Sensor (optional)

Computrace\* with GPS Tracking - Subscription based security solution providing the ability to track, initiate physical recovery, conduct asset management, and perform remote data delete by utilizing GPS technology. GPS functionality requires HP Mobile Broadband Module.

\* The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S.

<sup>1</sup> HP Drive Encryption requires Windows. Data is protected prior to login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.

<sup>2</sup> File Sanitizer requires Windows. For the use cases outlined in the DOD 5220.22-M Supplement. Does not support Solid State Drives (SSDs). Initial setup required. Web history deleted only in Internet Explorer and Firefox browsers and must be user enabled. With Windows 8.1, user must turn off Enhanced Protection Mode in IE11 for shred on browser close feature.

<sup>3</sup> BIOS Absolute Persistence module is shipped turned off, and will be activated when customers purchase and activate a subscription. Service may be limited. Check with Absolute for availability outside the U.S. The optional subscription service of Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit:

<http://www.absolute.com/company/legal/agreements/computrace-agreement>. If Data Delete is utilized, the Recovery Guarantee payment is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either create a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

<sup>4</sup> HP Automatic DriveLock will work on another HP Business PC when the BIOS passwords are the same. Requires user set up.

<sup>5</sup> For the use cases outlined in the DOD 5220.22-M Supplement. Does not support Solid State Drives (SSDs).

<sup>6</sup> HP DriveLock does not support Self Encrypting HDs (SEDs) if the encryption PIN is enabled.

<sup>7</sup> HP Secure Erase is for the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.

<sup>8</sup> HP 3D DriveGuard requires Windows.

<sup>9</sup> HP ePrint requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible

### Features

printers, supported documents and image types and other HP ePrint details, see [www.hp.com/go/businessmobileprinting](http://www.hp.com/go/businessmobileprinting)

<sup>10</sup> HP PageLift requires Windows 7 or higher.

<sup>11</sup> Box offer requires Box registration. Offer available to new Box users only. Offer subject to change without notice. Box app requires Windows 8 or 8.1.

<sup>12</sup> Intel AT security requires a separately purchased Absolute Computrace service subscription and must be activated and configured. Check with Absolute for availability in your country. Intel and HP assume no liability for lost or stolen data and/or systems or any other damages resulting therefrom. See <http://www.intel.com/technology/anti-theft/>

---

## HP CENTRAL MANAGEMENT

HP offers a variety of scalable hardware, software, and BIOS-based security features to help you defend your organization against viruses and other threats. These integrated security features safeguard what matters to you the most - your data, device and identity. Now, be confident your fleet of devices is protected in multiple layers of HP Client Security protection.

HP BIOS Protection keeps you up and running with enhanced protection against virus attacks and other threats. And if the BIOS is accidentally compromised, the auto recovery feature automatically restores it to its fully functional state.

HP Sure Start detects and negates a BIOS attack with automatic recovery of the BIOS even when the installation is accidentally compromised (i.e. power outage). When HP Sure Start heals the BIOS an event log is generated that an IT administrator can retrieve so the business is aware of a BIOS attack. Golden copy of BIOS is stored in protected nonvolatile memory providing redundant, hardware-based protection against a new generation of attacks. This helps to future-proof your technology and business.

An optional fingerprint reader and integrated Smart Card Reader help keep your identity secure. The security cable slot helps keep your notebook physically secure.

HP Drive Encryption+ with TPM enhanced security protects your data on your hard drive from unauthorized access. Authentication is required before Windows will even start.

Or you can even permanently destroy data on your hard drive in preparation for your system disposal or redeployment with Secure Erase.

This hardware-based solution encrypts and decrypts data as it is written or read from the hard drive and is supported by HP Drive Encryption+. You get faster encryption performance than that of software-based encryption solutions.

+ Requires Windows. Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.

HP provides a separate management solution, targeted at the enterprise and the SMB:

Digital Persona Pro Workgroup: Designed for the small business customer. Provides features similar to the Active Directory version, but for workgroups. Workgroup activation is built into HP ProtectTools, and activation of up to 5 seats is completely free.

For more information on Central Management for HP ProtectTools, refer to: <http://www.hp.com/products/security>

### Features

#### POWER

##### Power Supply

External HP 150W Slim Smart AC adapter  
(167.0 x 82.0 x 25.4mm)

External HP 200W Slim Smart AC adapter  
(172 x 96 x 25.4mm)

Power cord included is 6-foot (1.8 meter).

Total length including external AC adapter is 12 feet (3.66 meter).

HP Fast Charge\*

##### Primary Battery

HP 8-cell Lithium-Ion Battery (83 WHr)

HP Long Life 8-cell Lithium-Ion Battery (75 WHr) \*\*

##### Secondary Battery

HP BB09 Ultra Extended Life Notebook Battery (9-cell/100 WHr)

HP ST09 Extended Life Notebook Battery (9-cell/73 WHr)

##### Battery Life

Battery life up to xx hours and xx minutes\*\*\*

##### System Standby Time\*\*\*\*

In sleep mode 1 week

\* HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to the HP ST09 Extended Life Notebook Battery or HP BB09 Ultra Extended Life Notebook Battery.

\*\* Available with 3-year warranty only

\*\*\*Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark <http://www.bapco.com/products/mobilemark2007> for additional details.

\*\*\*\* Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

##### Power Conservation

NVIDIA Optimus or AMD Enduro™ technology

Hibernation

Standby

ACPI compliance

#### ENVIRONMENTAL

US ENERGY STAR®

IT ECO declaration

EPEAT®

#### WEIGHTS & DIMENSIONS

##### Weight

Starting at 6.13 lb (2.78 kg) with Z Turbo Drive and weight saver (no optical drive)

Starting at 6.45 lb (2.93 kg) with hard drive and DVD-R/W drive

### Features

**Dimensions** (w x d x h)

1.2 in (at front)/1.4 in (at rear) x 15.0 in x 10.1 in

30.5 mm (at front)/35.5 mm (at rear) x 381.5 mm x 257.0 mm

Height with DreamColor display: 1.34 in/ 34.0 mm at front; 1.54 in / 39 mm at rear

**NOTE:** Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 8-cell battery, hard drive, 1 GB memory, and no optical drive. Weight varies by configuration and components.

### PORTS/SLOTS

**Ports**

VGA – One

DisplayPort v1.2 – One

Thunderbolt™ 2\* – One

Stereo microphone in / headphone-out combo jack – One

Power Connector – One

Secondary Battery Connector – One

Docking Connector – One

RJ-45 (Ethernet) – One

USB 3.0 – Two

USB 3.0 Charging Port – One

USB 2.0 – One

Security lock slot – One

**Digital Media Slots**

ExpressCard/54 slot – One (Supports ExpressCard/54)

SD UHS-II Flash Media slot – One (Supports next generation SD (Secure Digital), backward compatible to SDHC, SDXC,

Integrated Smart Card Reader (Compatible with ISO 7816 compliant Smart Cards PC/SC interface support)

\* Thunderbolt™ 2 is new technology. Install all the latest drivers for your Thunderbolt device before connecting the device to the Thunderbolt port. Thunderbolt cable and Thunderbolt device (sold separately) must be compatible with Windows. To determine whether your device is Thunderbolt Certified for Windows, see <https://thunderbolttechnology.net/products>

### Features

#### **SERVICE AND SUPPORT**

HP Services offers 3-year and 1-year limited warranty options depending on country.

On-site service and extended coverage is also available. HP Care Pack Services are optional extended service contracts that go beyond the standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.  
<http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>



### Technical Specifications

#### SYSTEM UNIT

<b>Stand-Alone Power Requirements (AC Power)</b>	<b>Nominal Operating Voltage</b>	19.5 V	
	<b>Average Operating Power</b>	NVIDIA Graphics	<b>Windows 7 (64-bit)</b> 16.8 W
	<b>Max Operating Power</b>	< 150 W or < 200 W	
<b>Temperature</b>	<b>Operating</b>	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)	
	<b>Non-operating</b>	-4° to 140° F (-20° to 60° C)	
<b>Relative Humidity</b>	<b>Operating</b>	10% to 90%, non-condensing	
	<b>Non-operating</b>	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature	
<b>Shock</b>	<b>Operating</b>	40 G, 2 ms, half-sine	
	<b>Non-operating</b>	200 G, 2 ms, half-sine	
<b>Random Vibration</b>	<b>Operating</b>	0.75 grms	
	<b>Non-operating</b>	1.50 grms	
<b>Altitude (unpressurized)</b>	<b>Operating</b>	-50 to 10,000 ft (-15.24 to 3,048 m)	
	<b>Non-operating</b>	-50 to 40,000 ft (-15.24 to 12,192 m)	
<b>Planned Industry Standard Certifications</b>	<b>UL</b>	Yes	
	<b>CSA</b>	Yes	
	<b>FCC Compliance</b>	Yes	
	<b>ENERGY STAR®</b>	Select models*	
	<b>EPEAT®</b>	< 150 W or < 200 W	
	<b>ICES</b>	Yes	
	<b>Australia / NZ A-Tick Compliance</b>	Yes	
	<b>CCC</b>	Yes	
	<b>Japan VCCI Compliance</b>	Yes	
	<b>KC</b>	Yes	
	<b>BSMI</b>	Yes	
	<b>CE Marking Compliance</b>	Yes	

\* Configurations of the HP ZBook 15 that are ENERGY STAR qualified are identified as HP ZBook 15 G2 ENERGY STAR on HP websites and on [www.energystar.gov](http://www.energystar.gov).

\*\* EPEAT® registered where applicable. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

#### DISPLAY

<b>15.6" diagonal LED-</b>	<b>Active Area (W x H)</b>	13.54 x 7.59 in (34.4 x 19.4 cm)
----------------------------	----------------------------	----------------------------------

### Technical Specifications

<b>backlit FHD UWVA eDP anti-glare + Panel Self Refresh (PSR) (1920 x 1080)</b>	<b>Dimensions (W x H)</b>	15.6 in (39.6 cm)	
	<b>Weight</b>	420 g (max)	
	<b>Surface Treatment</b>	Anti-glare	
	<b>Contrast Ratio</b>	600:1 (typical)	
	<b>Refresh Rate</b>	60 Hz	
	<b>Brightness</b>	300 nit typical	
	<b>Pixel Resolution</b>	<b>Format</b>	1920 x 1080 (FHD)
		<b>Configuration</b>	RGB Stripe
	<b>Backlight</b>	LED	
	<b>PPI</b>	142	
<b>Viewing Angle</b>	UWVA 85/85/85/85		
<b>15.6" diagonal LED-backlit FHD SVA eDP anti-glare (1920 x 1080)</b>	<b>Active Area (W x H)</b>	13.54 x 7.59 in (34.4 x 19.4 cm)	
	<b>Dimensions (W x H)</b>	15.6 in (39.6 cm)	
	<b>Weight</b>	380 g (max)	
	<b>Surface Treatment</b>	Anti-glare	
	<b>Contrast Ratio</b>	400:1 (typical)	
	<b>Refresh Rate</b>	60 Hz	
	<b>Brightness</b>	300 nit typical	
	<b>Pixel Resolution</b>	<b>Format</b>	1920 x 1080 (FHD)
		<b>Configuration</b>	RGB Stripe
	<b>Backlight</b>	LED	
<b>PPI</b>	142		
<b>Viewing Angle</b>	SVA 45/45/25/35		
<b>15.6" diagonal LED-backlit QHD+ UWVA eDP anti-glare (3200 x 1800)</b>	<b>Active Area (W x H)</b>	13.60 x 7.59 in (34.56 x 19.44 cm)	
	<b>Dimensions (W x H)</b>	15.6 in (39.65 cm)	
	<b>Weight</b>	360 g (max)	
	<b>Surface Treatment</b>	Anti-glare	
	<b>Contrast Ratio</b>	600:1 (typical)	
	<b>Refresh Rate</b>	60 Hz	
	<b>Brightness</b>	300 nit typical	
	<b>Pixel Resolution</b>	<b>Format</b>	3200 x 1800 (QHD+)
		<b>Configuration</b>	RGB Stripe
	<b>Backlight</b>	LED	
<b>PPI</b>	235		
<b>Viewing Angle</b>	UWVA 85/85/85/85		

### STORAGE AND DRIVES

#### Internal Storage

<b>1 TB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.25 lbs. (115g)
	<b>Capacity</b>	1 TB
	<b>Height</b>	0.37 in (9.5 mm)

### Technical Specifications

<b>Width</b>	2.75 in (69.85 mm)
<b>Interface</b>	ATA-8, SATA 3.0,
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 600 MB/s
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b> 2 ms <b>Average</b> 13 ms <b>Maximum</b> 15 ms
<b>Cache</b>	32 MB
<b>Rotational Speed</b>	7200 rpm
<b>Logical Blocks</b>	1,953,525,168
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [top cover temp]
<b>Features</b>	ATA Security, S.M.A.R.T., NCQ, Ultra DMA

#### 750 GB 7200 rpm SATA Hard Drive

<b>Drive Weight</b>	0.25 lbs. (115g)
<b>Capacity</b>	750 GB
<b>Height</b>	0.37 in (9.5 mm)
<b>Width</b>	2.75 in (69.85 mm)
<b>Interface</b>	ATA-8, SATA 3.0
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 600 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b> 1.5 ms ~ 2 ms <b>Average</b> 11 ms ~ 13 ms <b>Maximum</b> 15 ms ~ 21 ms
<b>Cache</b>	Up to 32 MB
<b>Rotational Speed</b>	7200 rpm
<b>Logical Blocks</b>	1,465,149,168
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [top cover temp]
<b>Features</b>	ATA Security, NCQ, S.M.A.R.T., Ultra DMA

#### 500 GB 7200 rpm SATA Hard Drive

<b>Drive Weight</b>	0.20 lbs. (92 g) ~ 0.25 lbs (115 g)
<b>Capacity</b>	500 GB
<b>Height</b>	0.28 in (7 mm)/0.38 in (9.7 mm)
<b>Width</b>	2.75 in (69.85 mm)
<b>Interface</b>	ATA-8, SATA 3.0
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 600 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b> 1.5 ms ~ 2 ms <b>Average</b> 11 ms ~ 13 ms <b>Maximum</b> 18 ms ~ 22 ms
<b>Cache</b>	Up To 32 MB
<b>Rotational Speed</b>	7200 rpm
<b>Logical Blocks</b>	976,773,168
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [top cover temp]
<b>Features</b>	ATA Security, NCQ, S.M.A.R.T., Ultra DMA

#### 500 GB 5400 rpm SATA FIPS\* Hard Drive

<b>Drive Weight</b>	0.21 lbs. (95 g)
<b>Capacity</b>	500 GB

### Technical Specifications

<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 3.0	
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum)	600 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms
	<b>Average</b>	12 ms
	<b>Maximum</b>	22ms
<b>Cache</b>	16 MB	
<b>Rotational Speed</b>	5400 rpm	
<b>Logical Blocks</b>	976,773,168	
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [top cover temp]	
<b>Features</b>	ATA Security; TCG Opal 2.x, FIPS, S.M.A.R.T., NCQ, Ultra DMA	
	* <a href="#">FIPS-certified, hardware-based AES-256 encryption image.</a>	

#### 500 GB 7200 rpm SMART SATA II Self Encrypting Drive

<b>Drive Weight</b>	0.21 lbs. (95 g)	
<b>Capacity</b>	500 GB	
<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 2.6	
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum)	300 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1 ms
	<b>Average</b>	13 ms
	<b>Maximum</b>	18 ms
<b>Cache</b>	32 MB	
<b>Rotational Speed</b>	7200 rpm	
<b>Logical Blocks</b>	976,773,168	
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [top cover temp]	
<b>Features</b>	ATA Security; TCG OPAL v1.00, S.M.A.R.T., NCQ, Ultra DMA	

#### SATA 6 Gb/s 512 GB, 2.5-inch Solid State Drive

<b>Drive Weight</b>	0.17 lb. (78 g)	
<b>Capacity</b>	512 GB	
<b>NAND Type</b>	MLC	
<b>Height</b>	0.28 in (7 mm)	
<b>Width</b>	2.75 in (69.85 mm)	
<b>Interface</b>	ATA-8, SATA 3.0	
<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
	460 MB/s	260 MB/s
<b>Logical Blocks</b>	1,000,215,216	
<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	

#### SATA 6 Gb/s 240 GB, 2.5-

<b>Drive Weight</b>	0.17 lb. (78g)
---------------------	----------------

### Technical Specifications

<b>inch Solid State Drive</b>	<b>Capacity</b>	240 GB	
	<b>NAND Type</b>	MLC	
	<b>Height</b>	0.28 in (7 mm)	
	<b>Width</b>	2.75 in (69.85 mm)	
	<b>Interface</b>	ATA-8, SATA 3.0	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 540 MB/s	Up to 490 MB/s
	<b>Logical Blocks</b>	468,862,128	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C) [ambient temp]	
	<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	
<b>SATA 6 Gb/s 180 GB, 2.5-inch Solid State Drive</b>	<b>Drive Weight</b>	0.17 lb. (78g)	
	<b>Capacity</b>	180 GB	
	<b>NAND Type</b>	MLC	
	<b>Height</b>	0.28 in (7 mm)	
	<b>Width</b>	2.75 in (69.85 mm)	
	<b>Interface</b>	ATA-8, SATA 3.0	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 540 MB/s	Up to 490 MB/s
	<b>Logical Blocks</b>	351,651,888	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C) [ambient temp]	
<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP		
<b>SATA 6 Gb/s 128 GB, 2.5-inch Solid State Drive</b>	<b>Drive Weight</b>	0.17 lb. (78 g)	
	<b>Capacity</b>	128 GB	
	<b>Height</b>	0.28 in (7 mm)	
	<b>Width</b>	2.75 in (69.85 mm)	
	<b>Interface</b>	ATA-8, SATA 3.0	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		Up to 550 MB/s	Up to 350 MB/s
	<b>Logical Blocks</b>	250,069,680	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]	
	<b>Features</b>	ATA Security; DIPM; TRIM; DEVSLP	
<b>Z Turbo Drive 256 GB, PCIe Solid State Drive</b>	<b>Drive Weight</b>	0.02 lb. (10 g)	
	<b>Capacity</b>	256 GB	
	<b>Height</b>	0.24 in (60 mm)	
	<b>Width</b>	0.87 in (22 mm)	
	<b>Interface</b>	ATA-8, PCIe 2.0	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		730 MB/s	620 MB/s
<b>Logical Blocks</b>	500,118,192		

### Technical Specifications

**Operating Temperature** 32° to 158°F (0° to 70°C) [ambient temp]

**Features** ATA Security; DIPM; TRIM; DEVSLP

\* For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) of system and up to 30 GB (for Windows 8) disk is reserved for system recovery software.

### Technical Specifications

#### Optical Drives

<b>DVD+/-RW SuperMulti DL Drive</b>	<b>Access Times</b>	Random	<140ms CD (typical) < 160 ms DVD (typical)	
	<b>Max Data Transfer Rate</b>	24X CD-ROM 8X DVD 24X CD-R 24X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 6X - DVD+R Dual Layer 6X - DVD-R Dual Layer 5X DVD-RAM		
	<b>Transfer Mode</b>	UDMA Mode 5		
	<b>Interface</b>	Gen 1 SATA		
	<b>Supported Media (read)</b>	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM		
	<b>Supported Media (write)</b>	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, DVD+R DL, DVD-R DL		
	<b>Max Media Capacity (read)</b>	8.5 GB		
	<b>Max Media Capacity (write)</b>	8.5 GB		
	<b>Transport</b>	Tray Loading		
	<b>Blu-ray ROM DVD+/-RW SuperMulti DL Drive</b>	<b>Access Times</b>	Random	<190 ms CD-ROM (typical) < 180ms DVD-ROM (typical) <230 ms BD-ROM (typical)
		<b>Max Data Transfer Rate</b>	24X CD-ROM 8X DVD-ROM 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM 6X BD-ROM	
<b>Transfer Mode</b>		UDMA Mode 5		
<b>Interface</b>		Gen 1 SATA		

### Technical Specifications

<b>Supported Media</b> (read)	CD-DA, , CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW. DVD-RAM, BD-ROM, BD-R, BD-RE
<b>Supported Media</b> (write)	CD-R, CD-RW, DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-R DL, DVD-RW, DVD-RAM
<b>Max Media Capacity</b> (read)	50.0 GB
<b>Max Media Capacity</b> (write)	8.5GB
<b>Transport</b>	Tray Loading

### Blu-ray R/RE DVD+/-RW SuperMulti DL Drive

<b>Access Times</b>	Random	<165 ms CD-ROM (typical) <185 ms DVD-ROM (typical) <205 ms BD-ROM (typical)
---------------------	--------	---

<b>Max Data Transfer Rate</b>	24X CD-ROM 8X DVD-ROM 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD+R Dual Layer 6X DVD-R Dual Layer 5X DVD-RAM 6X BD-ROM 6X BD-R 2X BD-RE
-------------------------------	--

<b>Transfer Mode</b>	UDMA Mode 5
<b>Interface</b>	Gen 1 SATA

<b>Supported Media</b> (read)	CD-DA, , CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW. DVD-RAM, BD-ROM, BD-R, BD-RE
<b>Supported Media</b> (write)	CD-R, CD-RW, DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-R DL, DVD-RW, DVD-RAM, BD-R, BD-RE
<b>Max Media Capacity</b> (read)	50.0 GB
<b>Max Media Capacity</b> (write)	50.0 GB
<b>Transport</b>	Tray Loading

### SECURITY

<b>HP Fingerprint Sensor</b>	<b>Mobile Voltage Operation</b>	3.0V-3.6V Single Supply
	<b>Operating Temperature</b>	14° - 167°F (-10° - 75°C)



### Technical Specifications

<b>Current consumption image</b>	36mA
<b>Low latency wait for finger</b>	950 uA
<b>Capture rate</b>	3000 lines/sec
<b>ESD Resistance</b>	IEC 6100-4-2 4B (+/-15KV)
<b>Detection Matrix</b>	200*1 (plus another secondary line); 508 dpi, sensor area 12*3 mm

### NETWORKING/COMMUNICATIONS

<b>Intel® I217-LM Gigabit Network Connection</b>	<b>Ethernet Features</b>	<p>10 Mbit/s operation (10BASE-T; IEEE 802.3; IEEE 802.3 clauses 13-14)</p> <p>100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)</p> <p>1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023. Clauses 40)</p> <p>IEEE 802.3u Auto-Negotiation (Automatic Speed Selection)</p> <p>Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s</p> <p>IEEE 802.1p QoS (Quality of Service) Support</p> <p>IEEE 802.1q VLAN support</p> <p>IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)</p> <p>IEEE 802.3az EEE(Energy Efficient Ethernet)</p> <p>IEEE 802.1as/1588 conformance</p> <p>Jumbo Frame 9K</p> <p>Auto MDI/MDIX Crossover cable detection</p>
	<b>Power Management</b>	<p>ACPI compliant - multiple power modes</p> <p>Energy Detect Low Power Mode(Green Ethernet)</p>
	<b>Performance Features</b>	<p>TCP/IP/UDP Checksum Offload (configurable)</p> <p>Protocol Offload( ARP &amp; NS)</p> <p>Large send offload and Giant send offload</p> <p>Receiving Side Scaling</p> <p>MACSec Offload (802.3ae)</p> <p>Intel vPro</p> <p>iSCSI Boot</p>
	<b>Manageability</b>	<p>Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)</p> <p>PXE 2.1 Remote Boot</p> <p>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))</p> <p>Comprehensive diagnostic and configuration software suite</p> <p>Virtual Cable Doctor for Ethernet cable status</p>
	<b>Interface</b>	<p>PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ.</p> <p><b>NOTE:</b> Intel® I217-LM Gigabit interface is not PCIe compliant. It operates at half of PCIe specification V1.1 (2.5GT/S) speed.</p>
	<b>NIC Device Driver Name</b>	Intel Ethernet Network Connection I217-LM

<b>HP hs3110 HSPA+ Mobile Module*</b>	<b>Technology/Operating bands</b>	HSPA+: 2100 (Band 1), 1900 (Band 2), 850 (Band 5), 700 (Band 17) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
	<b>Wireless protocol standards</b>	WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9

### Technical Specifications

<b>GPS</b>	Standalone, A-GPS
<b>GPS bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
<b>Maximum data rates</b>	DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
<b>Maximum output power</b>	HSPA+: 23.5 dBm E-GPRS 1900/1800: 26.5 dBm E-GPRS 900/850: 27.5 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm
<b>Maximum power consumption</b>	HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average)
<b>Form Factor</b>	M.2, 3042-S3 Key B
<b>Weight</b>	6g
<b>Dimensions</b> (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

\* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products or in all countries.

### HP Lt4112 LTE/HSPA+ Qualcomm® Gobi™ 4G Module \*

<b>Technology/Operating bands</b>	LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 2600 (Band 7), 900 (Band 8), 800 MHz (Band 20, DD800) MHz HSPA+: 2100 (Band 1), 1900 (Band 2), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
<b>Wireless protocol standards</b>	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9
<b>GPS</b>	Standalone, A-GPS
<b>GPS bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
<b>Maximum data rates</b>	LTE: 100 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
<b>Maximum output power</b>	LTE: 23 dBm HSPA+: 23.5 dBm E-GPRS 1900/1800: 26.5 dBm E-GPRS 900/850: 27.5 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm
<b>Maximum power consumption</b>	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average)
<b>Form Factor</b>	M.2, 3042-S3 Key B
<b>Weight</b>	6 g

### Technical Specifications

**Dimensions** 1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)  
(Length x Width x Thickness)

\* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products or in all countries.

#### HP It4211 LTE/EV-DO/HSPA+ Gobi 4G Module

**Technology/Operating bands** LTE: 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 700 (Band 13 upper SMH), 700 (Band 17 lower SMH), 1900 MHz (Band 25, extended PCS) MHz  
HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz  
E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz  
EV-DO: 800 (BC0), 1900 (BC1) MHz

**Wireless protocol standards** 3GPP Release 8 LTE Specification  
WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification  
E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9  
EVDO Release 0 and Release A

**GPS** Standalone, A-GPS

**GPS bands** 1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz

**Maximum data rates** LTE: 100 Mbps (Download), 50 Mbps (Upload)  
DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload)  
HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload)  
EDGE: 236.8 kbps (Download), 236.8 kbps (Upload)  
GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)  
CDMA 1x: DL 153.6 kbps/UL 153.6 kbps  
EVDO Rev.A: DL 3.1 Mbps/UL 1.8 Mbps

**Maximum output power** LTE: 23 dBm  
HSPA+: 23.5 dBm  
E-GPRS 1900/1800: 26.5 dBm  
E-GPRS 900/850: 27.5 dBm  
GPRS 1900/1800: 29.5 dBm  
GPRS 900/850: 32.5 dBm  
CDMA/EVDO: 24dBm

**Maximum power consumption** LTE: 1,200 mA (peak); 900 mA (average)  
HSPA+: 1,100 mA (peak); 800 mA (average)  
E-GPRS: 2,800 mA (peak); 700 mA (average)  
EVDO: 1000mA (peak); 720mA (average)

**Form Factor** M.2, 3042-S3 Key B

**Weight** 6 g

**Dimensions** 1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)  
(Length x Width x Thickness)

\* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products or in all countries.

### Technical Specifications

**Wireless-NB 7260 802.11  
a/b/g/n (2x2) WiFi  
Adapter\***

IEEE 802.11b  
IEEE 802.11g  
IEEE 802.11n

**Interoperability  
Frequency Band**

Wi-Fi certified  
802.11b/g/n

- 2.402 - 2.482 GHz

802.11a/n

- 4.9 - 4.95 GHz (Japan)
- 5.15 - 5.25 GHz
- 5.25 - 5.35 GHz
- 5.47 - 5.725 GHz
- 5.825 - 5.850 GHz
- 2.402 - 2.482 GHz

**Data Rates**

802.11b: 1, 2, 5.5, 11 Mbps  
802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  
802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  
802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)

**Modulation**

Direct Sequence Spread Spectrum  
BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM

**Security<sup>1</sup>**

- IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only
- AES-CCMP: 128 bit in hardware
- 802.1x authentication
- WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.
- WPA2 certification
- IEEE 802.11i
- Cisco Certified Extensions, all versions through CCX4 and CCX Lite
- WAPI

**Network Architecture  
Models**

Ad-hoc (Peer to Peer)  
Infrastructure (Access Point Required)

**Roaming**

IEEE 802.11 compliant roaming between access points

**Output Power<sup>2</sup>**

- 2.4G: +13.5dBm minimum
- 5G: +12dBm minimum
- Maximum output power must be able to achieve modular regulatory certification with notebooks that have antennas >20cm from the user and peak gain of +3dBi at 2.4GHz and +4dBi at 5GHz

**Power Consumption**

Transmit: 2.0 W (max)  
Receive: 1.6 W (max)  
Idle mode (PSP): 250 mW (WLAN Associated)  
Idle mode: 100 mW (WLAN unassociated)  
Radio disabled: 75 mW

**Power Management**

ACPI and PCI Express compliant power management  
802.11 compliant power saving mode

### Technical Specifications

<b>Receiver Sensitivity<sup>3</sup></b>	802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps)
	802.11a/g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)
	802.11n:-69 dBm (72.2 Mbps), -66 dBm (300 Mbps)
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Dimensions</b>	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
<b>Weight</b>	3.1g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON
	1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
<b>Bluetooth Specification</b>	
<b>Bluetooth Specification</b>	V4.0 High Speed, V2.1+EDR, backwards compatible with V1.1, 1.2 and 2.0
<b>Number of Available Channels</b>	79 (1 MHz) available channels
<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
<b>Transmit Power</b>	-6 dBm to 4 dBm (Bluetooth Class II)
<b>Receiver Sensitivity</b>	Better than -80 dBm at 0.1 % raw bit error rate
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Sleep <17 mW
<b>Antenna</b>	Internally integrated within module
<b>Range</b>	Up to 33 ft (10 m)
<b>Electrical Interface</b>	USB 2.0 compliant Microsoft Windows Plug and Play compliant
<b>Bluetooth Software Supported</b>	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves

### Technical Specifications

<b>Security</b>	Full support of Bluetooth Security Provisions
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
<b>Certifications</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
<b>Bluetooth Profiles Supported</b>	Generic Access Profile (GAP) Service Discovery Application Profile (SDAP) Serial Port Profile (SPP) Dial_Up Networking Profile (DUN) Generic Object Exchange Profile (GOEP) Object Push Profile (OPP) File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) Personal Area Networking Profile (PAN) Human Interface Device Profile (HID) Generic Audio/Video Distribution Profile (GAVDP) Advanced Audio/Video Distribution Profile (A2DP) FAX Profile (FAX) Basic Imaging Profile (BIP) Headset Profile (HSP) Hands Free Profile (HFP) Basic Printing Profile (BPP) VDP (Video Distribution Profile) AVRCP (Audio Video Remote Control Profile)

\* Wireless access point and internet service required. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices

<b>Intel® Dual Band Wireless-AC 7260 802.11 a/b/g/n/ac (2x2) WiFi + Bluetooth 4.0 Combo Adaptor*</b>	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
	<b>Interoperability</b>	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
	<b>Frequency Band</b>	802.11b/g/n                      2.402 - 2.482 GHz 802.11a/n                      4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz
	<b>Antenna Structure</b>	2 transmit; 2 receive (2x2)
	<b>Data Rates</b>	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps

### Technical Specifications

	802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: card will support rates for NSS=1 and NSS=2 for RX and TX for 20 and 40 MHz channels. Short and long guard interval shall be supported. 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
<b>Modulation</b>	Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM
<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul>
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between band Access Points
<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• 2.4G: +13.5dBm minimum</li> <li>• 5G: +12dBm minimum</li> </ul>
<b>Power Consumption</b>	Transmit: 2.0 Watts Receive: 1.6 Watts Idle mode <sup>3</sup> : 250 mW (WLAN Associated) Idle mode: 100 mW (WLAN unassociated) Radio off: 75 mW
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>4</sup></b>	802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)  802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps)  802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)  802.11n:-69 dBm (150 Mbps), -66 dBm (300 Mbps)
<b>Antenna Connections</b>	2 U.FL type connectors (output impedance of 50 ± 2 ohms)
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Dimensions</b>	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
<b>Weight</b>	3.1g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing)

### Technical Specifications

<b>Altitude</b>	Non-operating	5% to 95% (non-condensing)
	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. In Power Save Polling mode and on battery power.</li> <li>4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</li> </ol>	

<b>HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology</b>	<b>Bluetooth Specification</b>	4.0+EDR Compliant
	<b>Dimensions</b>	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm))
	<b>Frequency Band</b>	2402 to 2480 MHz
	<b>Number of Available Channels</b>	79 (1 MHz) available channels
	<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps
		Synchronous Connection Oriented links up to 3, 64 kbps, voice channels
		Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	<b>Transmit Power</b>	-1.5 dBm to 4 dBm (Bluetooth Class II)
	<b>Receiver Sensitivity</b>	Better than -20 dBm at 0.1 % raw bit error rate
	<b>Power Consumption</b>	Peak (Tx) 264 mW
		Peak (Rx) 231 mW
		Sleep <1 mW
	<b>Antenna</b>	Internally integrated within module
	<b>Range</b>	Up to 33 ft (10 m)
	<b>Electrical Interface</b>	USB 2.0 compliant
		Microsoft Windows Plug and Play compliant
<b>Bluetooth Software Supported</b>	Broadcom Bluetooth for Windows	
	Microsoft Windows Bluetooth Software	
<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves	
<b>Security</b>	Full support of Bluetooth Security Provisions	
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support	
	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff	
<b>Certifications</b>	All necessary regulatory approvals for supported countries, including:	
	FCC (47 CFR) Part 15C, Section 15.247 & 15.249	
	ETS 300 328, ETS 300 826	
	Low Voltage Directive IEC950 UL, CSA, and CE Mark	



### Technical Specifications

<b>Bluetooth Profiles Supported</b>	Serial Port Profile (SPP) <sup>1</sup>
	Service Discovery Application Profile (SDAP)
	Dial-Up Networking (DUN) <sup>1,2</sup>
	Generic Object Exchange Profile (GOEP) <sup>1,2</sup>
	Object Push Profile (OPP) <sup>1,2</sup>
	File Transfer Profile (FTP)
	Synchronization Profile (SYNC)
	Hard Copy Cable Replacement (HCRP) <sup>1,2</sup>
	Personal Area Networking Profile (PAN) <sup>1,2</sup>
	Human Interface Device Profile (HID) <sup>1,2</sup>
	FAX Profile (FAX)
	Basic Imaging Profile (BIP) <sup>2</sup>
	Headset Profile (HSP)
	Hands Free Profile (HFP)
Advanced Audio Distribution Profile (A2DP)	

1. Indicates the profile is supported by Microsoft Windows XP SP2

2. Indicates the profile is part of Windows Vista

\* Wireless access point and internet service required. Availability of public wireless access points limited.

### AUDIO/MULTIMEDIA

#### AUDIO/MULTIMEDIA - DTS SOUND+

<b>Hardware</b>	<b>Implementation</b>	IDT 92HD91
	<b>Function Key</b>	Volume up, volume down, and mute
	<b>Volume Controls</b>	
	<b>Full Duplex</b>	Yes
	<b>Microphone In</b>	Stereo
	<b>Headphone/Line Out</b>	Stereo
	<b>Integrated Microphone</b>	Yes, dual digital microphone array when equipped with optional webcam
<b>Audio Output Quality</b>	<b>Frequency Response</b>	20 Hz - 20 kHz
	<b>Signal to Noise Ratio</b>	>85 dB
	<b>Total Harmonic Distortion</b>	0.01%
	<b>Noise Floor</b>	-110 dB
	<b>Play/Record Sampling Rate(s)</b>	8 kHz - 48kHz
	<b>DAC</b>	16, 20 or 24-bit
	<b>ADC</b>	16 or 20-bit
<b>Internal Stereo Speaker</b>	<b>Power Rating</b>	2 Watts
	<b>Impedance</b>	4 ohms

### POWER

### Technical Specifications

<b>HP 200W Slim Smart AC Adapter</b>	<b>Dimensions</b>	6.77 x 3.80 x 1.0 in (172 x 96 x 25.4 mm)	
	<b>Weight</b>	1.65 lb (748 g)	
	<b>Input</b>	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
	<b>Output</b>	Input AC current	2.9 A at 90 VAC, 1.45 A at 180 VAC
		Output power	200W
		DC output	19.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<16A, Over voltage protection- 29V max automatic shutdown
	<b>Connector</b>	3 pin/grounded, mates with interchangeable cords	
	<b>Environmental Design</b>	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
Storage Humidity		10% to 90%	
<b>EMI and Safety Certifications</b>	CE Mark- full compliance with LVD and EMC directives; Worldwide safety standards- IEC950, EN60950, UL1950, Class 1, SELV; Agency approvals- C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCIB, NOM-1 NYCE; MTBF- over 200,000 hours at 25°C ambient condition.		
<b>HP 150W Slim Smart AC adapter</b>	<b>Dimensions</b>	6.59 x 3.23 x 1.0 in (167.5 x 82 x 25.4 mm)	
	<b>Weight</b>	1.25 lb (565 g)	
	<b>Input</b>	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
	<b>Output</b>	Input AC current	<2.7 A at 90 VAC
		Output power	150W
		DC output	19.50V +5.0%/-5.0%
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<15A, Over voltage protection- 29V max automatic shutdown
	<b>Connector</b>	3 pin/grounded, mates with interchangeable cords	
	<b>Environmental Design</b>	Operating temperature	41° to 95° F (5° to 35° C)
		Non-operating (storage) temperature	-4° to 185° F (-20° to 85° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	10% to 95%
Storage Humidity		10% to 95%	
<b>EMI and Safety Certifications</b>	Worldwide safety and EMC approvals including CE, UL, CSA or cUL, GS, Australian Electric Permit, C-tick, NOM, CCC, KC, GOST, SABS, S mark, BSMI, ISC, PSE, PSB and SII.		

### Technical Specifications

<b>HP 8-cell Lithium-Ion Battery (83 WHr)</b>	<b>Dimensions (H x W x L)</b>	0.8 x 2.1 x 10.6 in (2 x 5.3 x 27cm)		
	<b>Weight (max)</b>	0.99lb (0.442 kg)		
	<b>Cells/Type</b>	Lithium-Ion		
	<b>Energy</b>	<b>Voltage</b>	14.8V	
		<b>Amp-hour capacity</b>	5.6Ah	
		<b>Watt-hour capacity</b>	83Wh	
	<b>Temperature</b>	<b>Operating (Charging)</b>	32° to 113° F (0° to 45° C)	
		<b>Operating (Discharging)</b>	14° to 122° F (-10° to 50° C)	
		<b>Non-operating</b>	-4° to 122° F (-20° to 50° C)	
	<b>Battery Re-Charge Time</b>	<b>System in OFF or Standby Mode</b>	2.5 hours	
		<b>System ON</b>	3 to 5 hours	
<b>Fuel Gauge LED</b>	No			
<b>Warranty</b>	1 year			
<b>Compatible with optional Travel Battery</b>	Yes			

<b>HP Long Life 8-cell Lithium-Ion Battery (75 WHr)</b>	<b>Dimensions (H x W x L)</b>	0.8 x 2.1 x 10.6 in (2 x 5.3 x 27cm)		
	<b>Weight (max)</b>	0.99lb (0.442 kg)		
	<b>Cells/Type</b>	8-cell; Lithium-Ion		
	<b>Energy</b>	<b>Voltage</b>	14.4V	
		<b>Amp-hour capacity</b>	5.1Ah	
		<b>Watt-hour capacity</b>	75Wh	
	<b>Temperature</b>	<b>Operating (Charging)</b>	32° to 113° F (0° to 45° C)	
		<b>Operating (Discharging)</b>	14° to 140° F (-10° to 60° C)	
		<b>Non-operating</b>	-4° to 140° F (-20° to 60° C)	
	<b>Battery Re-Charge Time</b>	<b>System in OFF or Standby Mode</b>	2.5 hours	
		<b>System ON</b>	3 to 5 hours	
<b>Fuel Gauge LED</b>	No			
<b>Warranty*</b>	3 year			
<b>Compatible with optional Travel Battery</b>	Yes			

\* 3-year platform warranty is required for a 3-year Long Life Battery warranty.

<b>Optional HP BB09 Ultra Extended Life Notebook Battery (secondary battery)</b>	<b>Dimensions (H x W x L)</b>	1.2 x 5.9 x 11.4 in (3x15x29cm)		
	<b>Weight (max)</b>	1.5lb, (.682kg)		
	<b>Cells/Type</b>	Lithium-Ion		
	<b>Energy</b>	<b>Voltage</b>	11.25V	
		<b>Amp-hour capacity</b>	8.85Ah	
		<b>Watt-hour capacity</b>	100Wh	
	<b>Temperature</b>	<b>Operating (Charging)</b>	32° to 113° F (0° to 45° C)	
		<b>Operating (Discharging)</b>	14° to 122° F (-10° to 50° C)	
<b>Non-operating</b>		-4° to 122° F (-20° to 50° C)		

### Technical Specifications

<b>Battery Re-Charge Time</b>	<b>System in OFF or Standby Mode</b>	3.5 to 5 hours
	<b>System ON</b>	4 to 7 hours
<b>Fuel Gauge LED</b>	Yes	
<b>Warranty</b>	1 year	
<b>Compatible with optional Travel Battery</b>	No	

### Optional HP ST09 Extended Life Notebook Battery ("Travel Battery") (secondary battery)

<b>Dimensions (H x W x L)</b>	1.2 x 6.1 x 12 in (3x15.5x30.5cm)
<b>Weight (max)</b>	1.2lb, (.550kg)
<b>Cells/Type</b>	Lithium-Ion Polymer
<b>Energy</b>	<b>Voltage</b> 11.1V <b>Amp-hour capacity</b> 6.6Ah <b>Watt-hour capacity</b> 73Wh
<b>Temperature</b>	<b>Operating (Charging)</b> 32° to 113° F (0° to 45° C) <b>Operating (Discharging)</b> 14° to 122° F (-10° to 50° C) <b>Non-operating</b> -4° to 122° F (-20° to 50° C)
<b>Battery Re-Charge Time</b>	<b>System in OFF or Standby Mode</b> 3.5 to 5 hours <b>System ON</b> 4 to 7 hours
<b>Fuel Gauge LED</b>	Yes
<b>Warranty</b>	1 year
<b>Compatible with optional Travel Battery</b>	Yes

### ENVIRONMENTAL

US ENERGY STAR®  
 IT ECO declaration  
 EPEAT®

### COUNTRY OF ORIGIN

China

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
<b>Memory</b>	HP 4 GB DDR3L-1600 1.35V SODIMM	H6Y75AA#xxx
	HP 8 GB DDR3L-1600 1.35V SODIMM	H6Y77AA#xxx
<b>Cases</b>	HP Business Top Load Case (fits up to 15.6")	H5M92AA
	HP Business Backpack (fits up to 17.3")	H5M90AA
	HP Essential Top Load Case (up to 15.6")	H2W17AA#xxx
	HP Professional Leather Case (up to 17.3")	H4J94AA
	HP Business 4 Wheel Roller Case (fits up to 17.3")	H5M93AA
<b>Docking</b>	HP Adjustable Dual Monitor Stand	AW664AA#xxx
	HP Adjustable Display Stand	AW663AA#xxx
	HP Dual Hinge II Notebook Stand	E8F99AA
	HP Display and Notebook II Stand	E8G00AA
	HP 230W Docking Station	A7E34AA#xxx
	HP 230W Advanced Docking Station	A7E38AA#xxx
	HP 3005pr USB 3.0 Port Replicator	H1L08AA
	HP 3001pr USB 3 Port Replicator	F3S42AA
	HP Universal Port Replicator	E6D70AA#xxx
<b>Input/Output</b>	Comfort Grip Mouse	H2L63AA
	HP Stylish USB KB/Mouse	H4B80AA#xxx
	HP Slim Bluetooth Keyboard	H4Q44AA#xxx
	HP 3-Button Laser Mouse	H4B81AA#xxx
	HP USB Essential Keyboard and Mouse	H6L29AA#xxx
	HP Ultra Mobile Wireless Mouse	H6F25AA#xxx
	HP Wireless Keyboard and Mouse	G1K29AA#xxx
	HP X4000 Bluetooth Mouse	H3T50AA#xxx
	USB Graphics Adapter	NL571AT
	HP Slim Bluetooth Mouse	F3J92AA#xxx
HP USB Smart Card Reader	F6V67AA	
<b>Power Adapters</b>	HP 90W Slim AC Adapter	H6Y83AA#xxx
	HP 150W Smart AC Adapter (slim)	AL192AA#xxx
	HP 90W Slim Combo Adapter w/USB Adapter	H6Y84AA#xxx
	90W Smart AC/Auto/Air Combo Adapter	AJ652AA#xxx
	90W Smart Auto/Truck Adapter	ED493AA
	90W Slim Adapter	BT796AA#XXX
	HP Smart 230W AC Adapter	AT895AA#xxx
	HP 230W Slim Adapter	H1D36AA#xxx
	HP 65W Smart AC Adapter	H6Y89AA#xxx
	HP 90W Smart AC Adapter	H6Y90AA#xxx
HP 65W Slim AC Adapter	H6Y82AA#xxx	

Options and Accessories (sold separately and availability may vary by country)

<b>Adapters</b>	HP Wireless display adapter	J1V25AA#xxx
	USB dual output graphics adapter	C5U89AA
	DisplayPort to DVI Adapter	F7W96AA
	DisplayPort to VGA Adapter	F7W97AA
	DisplayPort to HDMI Adapter	F3W43AA
	Adapter, USB Graphics – dual output (Monitor Accy)	C5U89AA/AT
<b>Storage – External Storage</b>	HP 2013 MWS Upgrade Bay DVD	G1Y57AA
	HP 2013 MWS Upgrade Bay 750GB HDD	G1Y56AA
	HP External USB Optical Drive	F2B56AA
	HP 500GB 7200rpm HDD	F3B97AA
	HP 750GB 7200rpm HDD	H2P67AA
	HP 128GB Solid State Drive	F4P50AA
	HP 180GB Solid State Drive	H4T75AA
	HP 512GB Solid State Drive	J2V75AA
	HP MWS HDD/SDD Bracket Only	J2D73AA
<b>Batteries</b>	HP ST09 Extended Life Notebook Battery	QK639AA
	HP BB09 Ultra Extended Life Notebook Battery	QK640AA
	HP AR08XL Notebook Battery	E7U26AA
<b>Health and Education</b>	HP 20-Notebook Managed Charging Cart	QL489AA#xxx
	HP 20-Notebook Charging Cart	QL488AA#xxx
	HP 30-Notebook Managed Charging Cart	QL490AA#xxx
	HP 30-Notebook Charging Cart	H4F31AA#xxx
<b>Security</b>	HP Docking Station Cable Lock	AU656AA#xxx
	HP UltraSlim Keyed Cable Lock	H4D73AA
<b>Wireless</b>	HP hs3110 HSPA+ W 8.1 WWAN	J8F05AA
	HP lt4211 LTE/EV-DO/HSPA+ WWAN	J8F06AA
	HP lt4112 LTE/HSPA+ W8.1 WWAN	J8F07AA

### Summary of Changes

<b>Date of change:</b>	<b>Version History:</b>		<b>Description of change:</b>
August 25, 2014	v1	Added	General styles and specifications

### Summary of Changes

Copyright © 2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel®, Core®, Celeron and Thunderbolt are registered trademarks or trademarks of Intel® Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of its proprietor, used by Hewlett-Packard Company under license. Adobe is a trademark of Adobe Systems Incorporated. Qualcomm® and Gobi® are trademarks of Qualcomm, Inc. ENERGY STAR® is a registered mark of the U.S. government. Microsoft and Windows are registered trademarks of the Microsoft Group of companies.