


Overview

HP ZBook 15u G3 Mobile Workstation

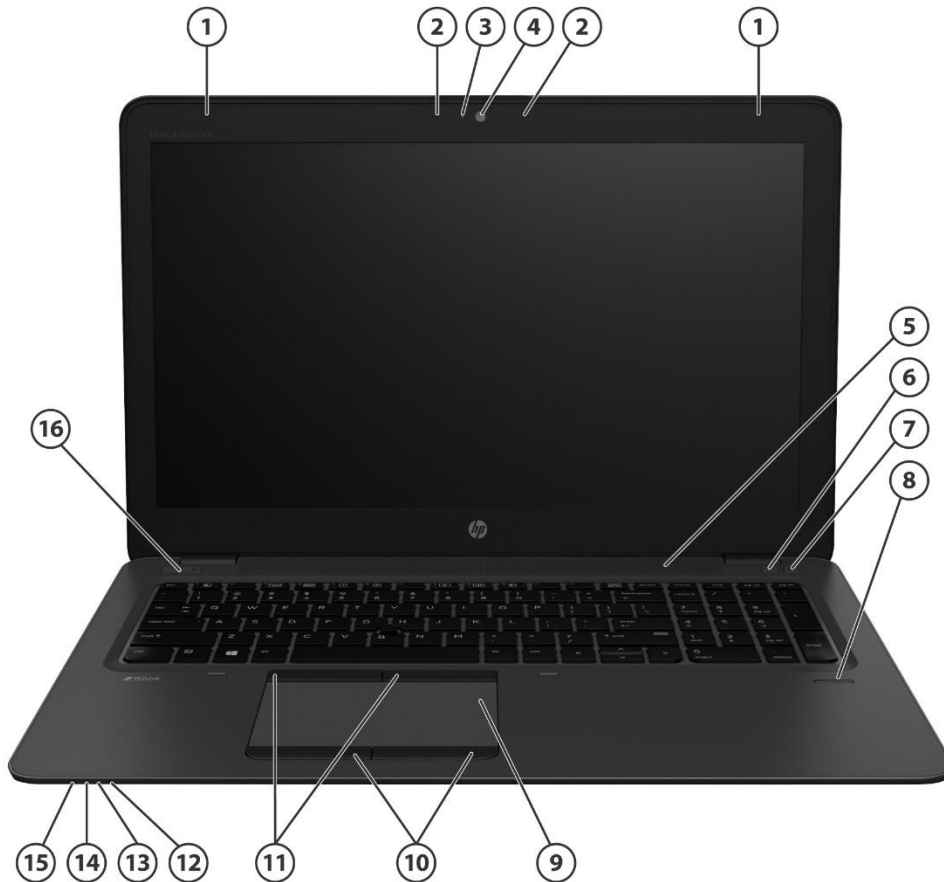

Front

- | | |
|--|---|
| 1. Wireless LAN antennas | 10. Lower Touchpad buttons (right and left click buttons) |
| 2. Internal microphones (2) | 11. Upper Touchpad buttons (right and left click buttons) |
| 3. Webcam light | 12. Storage light indicator |
| 4. Webcam | 13. Battery light indicator |
| 5. Speakers | 14. Power light indicator |
| 6. Wireless On/Off button | 15. Wireless light indicator |
| 7. Volume mute button | 16. Power button |
| 8. Fingerprint reader (select models only) | |
| 9. Touchpad | |

Overview



Left

- 1. Security lock slot
- 2. VGA port
- 3. USB 3.0 port (charging)
- 4. Smart Card reader



Right

- 1. USB 3.1 (Gen 1)
- 2. DisplayPort
- 3. SD Card Reader
- 4. Headphone/Microphone Combo Jack
- 5. USB 3.0 port
- 6. RJ-45 / Ethernet
- 7. Side Docking connector
- 8. SIM Module Slot
- 9. Power connector

Overview

At A Glance

- Windows® 10 editions, Windows® 7 editions, or FreeDOS
- Full performance form factor and thinner industrial design than previous generation workstation grade products.
- Thin & light value performance industrial design, Casted magnesium-reinforced chassis, top cover frame features soft touch paint with lightweight aluminum insert anodized in HP's new "Space Silver" color with chemical etching. Backlight keyboard in full aluminum deck with magnesium bottom reinforcement, chemically strengthened glass touchpad, and updated system functions indicators. HP Spill Resistant Keyboard with Durakeys, touchpad buttons with Duracoat finish. Diamond cut process showcased around keyboard deck.
- Designed to pass military standard Mil-Std-810G testing.
- Workstation-caliber AMD® FirePro® discrete graphics: AMD® FirePro® W4190M (2 GB dedicated GDDR5); AMD® Enduro™ graphics technology.
- ISV certified to provide fast and reliable performance with workstation applications, including manipulation of 3D textures
- Choice of 6th generation Intel® Core™ i7 and i5 processors
- Intel® Core i7 with vPro and Core i5 with vPro technology (optional)
- HP Performance Advisor for optimal configuration, compatibility and performance
- Up to two SODIMMs, for system memory up to 32GB
- Supports up to 3 independent displays via internal LCD Panel, system DisplayPort, system VGA, or using the HP UltraSlim Docking Station DisplayPort and VGA ports (sold separately). Supports DisplayPort 1.2 monitors.
- Bang and Olufsen audio optimized for high fidelity audio with immersive surround sound with deep, rich bass and crystal clear dialog without distortion at high volume
- 3-cell (46 WHr) HP Long Life Battery
- 2 discrete buttons with LED indicator for convenient one touch access: Wireless On/Off, Volume Mute
- Widescreen 15-inch diagonal anti-glare LED-backlit display:
- FHD (1920x1080) standard viewing angle, FHD (1920x1080) ultrawide viewing angle, UHD (3840x2160) ultrawide viewing angle, or FHD Touch (1920x1080) standard viewing angle
- Supports wireless LAN and wireless WAN options for connectivity on the go.
- Two dedicated drive slots. (1) M.2 slots and (1) 2.5" drive bay. Both can be populated at the same time.
- Security features including HP Client Security Manager, with central management
- Low halogen, ENERGY STAR® certified and EPEAT® TBD registered in the U.S. EPEAT® status varies by country- please see epeat.net.
- HP BIOS self-healing technology including HP Sure Start to prevent, detect, and remedy known and unknown BIOS attacks.

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Features

OPERATING SYSTEM

Preinstalled OS Windows® 10 Pro 64*
Windows® 10 Home 64
Windows® 7 Professional 64**
Windows® 7 Professional 64 (available through downgrade rights from Windows 10 Pro) **
FreeDOS 2.0

Supported OS Windows® 8.1 Enterprise 64*
Windows® 8.1 Professional 64
Windows® 7 Enterprise 32*
Windows® 7 Enterprise 64*
Windows® 10 Enterprise 64*
Red Hat® Enterprise Linux® Desktop 6, 7

* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.microsoft.com>

** This system is preinstalled with Windows 7 Professional software and also comes with a license and media for Windows 10 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

NOTE: For detailed OS/hardware support information for Linux®, see: http://www.hp.com/support/linux_hardware_matrix

PROCESSOR*

6th Generation Intel® Core™ i7 6600U (2.6 GHz, 4 MB cache, 2 cores) * Up to 3.4 GHz with Intel® Turbo Boost Technology
6th Generation Intel® Core™ i7 6500U (2.5 GHz, 4 MB cache, 2 cores) * Up to 3.1 GHz with Intel® Turbo Boost Technology
6th Generation Intel® Core™ i5 6300U (2.4 GHz, 3 MB cache, 2 cores) * Up to 3.0 GHz with Intel® Turbo Boost Technology
6th Generation Intel® Core™ i5 6200U (2.3 GHz, 3 MB cache, 2 cores) * Up to 2.8 GHz with Intel® Turbo Boost Technology

* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

Also note that the Intel® Turbo Boost is based on max GHz for a single core.

Features

CHIPSET

Non-applicable, processor specific

INTEL® CORE I5 WITH VPRO/CORE I7 WITH VPRO TECHNOLOGY CAPABLE

Intel® Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with select processors, a qualified Intel® Centrino® WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology (iAMT) offers built-in manageability and proactive security for networked mobile workstations, even when they are powered off* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update mobile workstations regardless of their power state.

*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

NOTE: Some functionality of Intel® Core i5 with vPro/Core i7 with vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional third- party software in order to run. Availability of future "virtual appliances" applications for Intel® Core i5 with vPro/Core i7 with vPro technology is dependent on third- party software providers. Compatibility with future "virtual appliances" is yet to be determined.

GRAPHICS

Intel® HD 5500 Graphics*

AMD® FirePro® W4190M (2 GB dedicated GDDR5) **

Microsoft DirectX 12 (Shader Model 5.0) and OpenGL 4.4 capable

AMD® Enduro™ Technology supported.

* HD content required to view HD images

** Supports up to 3 independent displays via internal LCD Panel, system DisplayPort, system VGA, or using the HP UltraSlim Docking Station DisplayPort and VGA ports (sold separately).

DISPLAY

Internal

15.6" diagonal LED backlit FHD UWVA IPS eDP anti-glare + PSR (Panel Self Refresh) (1920 x 1080);

15.6" diagonal LED backlit FHD SVA eDP anti-glare (1920 x 1080);

15.6" diagonal LED UHD UWVA IPS anti-glare (3840 x 2160)

15.6" diagonal Touch LED-backlit FHD SVA (1920 x 1080)

External

Up to 30-bit (2³⁰) per pixel "Deep Color"

(total of 1,073,741,824 color variations)

VGA

Port supports resolutions up to 1920 x 1200 at 60 Hz, and lower resolutions up to 75 Hz.

Features

DisplayPort w/MST (Multi-stream Transport)

Supports resolutions up to UHD 3840 x 2160, 24/30-bit color depth at 60 Hz, and WUXGA (1920 x 1200) monitors, with 24/30-bit color depth up to 120 Hz.

DisplayPort Features

- Multi-stream Transport (MST): Multi-stream Transport is a DisplayPort 1.2 feature that allows daisy chaining of DisplayPort 1.2 monitors (requires monitor with DisplayPort 1.2 MST capability), or the use of DisplayPort 1.2 hubs with MST to achieve a maximum of 3 active displays.

DVI-D (single link)

DVI support requires a DP-to-DVI adapter (sold separately). Dual-Link DVI is supported with an active USB powered adapter (sold separately).

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage Bay

SATA, 2.5" Hard Drive*

1 TB 5400 rpm Hard Drive
500 GB 7200 rpm Hard Drive
500 GB 7200 rpm Self Encrypting Drive (Opal2)
500 GB 7200 rpm Self Encrypting Drive FIPS 140-2 compliant
500 GB 5400 rpm Hybrid Drive (8 GB cache)

M.2 SATA Solid State Drive

128 GB SATA-3 TLC Solid State Drive (available in 1H16)

M.2 SATA SED SSD

256 GB SATA-3 Self-Encrypting (Opal 2) MLC Solid State Drive

HP Z Turbo Drive (NVMe PCIe SSD)

256 GB PCIe NVMe Solid State Drive
512 GB PCIe NVMe Solid State Drive

HP 3D DriveGuard (Windows only)

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive.

NOTE: For Solid State Drives or Hard Drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 8.1 and 10) is reserved for system recovery software.

DRIVE CONTROLLERS

2.5" Storage Bays and M.2 Storage Bay (SATA):

HP Z Turbo Drive:

RAID:

SATA-3 for HDD and SATA-3 for SSD

PCIe NVMe SSD

0, 1 supported*

NOTE: Raid 0, 1 supported only on SATA drives.

Features

MEMORY

Standard

32 GB DDR4 1.2V Non ECC SDRAM (Transfer rates up to 2133MT/s)
Two SODIMM slots supporting dual-channel memory
4 GB, 8GB and 16 GB SODIMMs

Maximum

Upgradeable to 32768 MB with optional 16384 MB SODIMMs in 2 slots

Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory channels.

* Maximum memory capacities assume Windows 64-bit operating systems or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

NETWORKING/COMMUNICATIONS

Communications

Integrated Intel® I219-LM Gigabit* Network Connection (vPro configurations)
Intel® WGI219V 10/100/1000 Ethernet (non-vPro configurations)

Wireless

Secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) combined with the supported wireless LAN option.

802.11 Wireless LAN*

Intel® Dual Band Wireless-AC 8260 802.11 a/b/g/n/ac (2x2) WiFi + Bluetooth 4.2 Combo Adaptor* (vPro)
Intel® Dual Band Wireless-AC 8260 802.11 a/b/g/n/ac (2x2) WiFi + Bluetooth 4.2 Combo Adaptor* (non-vPro)
Intel® Dual Band Wireless-AC 3165 802.11 ac (1x1) WiFi and Bluetooth 4.0 Combo Adapter (non-vPro)

Wireless WAN - Mobile Broadband **

HP It4120 Qualcomm® Snapdragon™ X5 LTE Mobile Broadband Module
HP hs3110 HSPA+ Intel® Mobile Broadband Module

* Wireless cards are optional or add-on features and requires separately purchased wireless access point and internet service. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

** WWAN use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products, and in all regions.

Features

AUDIO/MULTIMEDIA

Audio

Bang and Olufsen audio

Integrated stereo speakers

Integrated microphone (dual-microphone array when equipped with optional webcam)

Button for volume mute; function keys for volume up and down

Combo mic-in / stereo headphone-out jack

Webcam

720p HD webcam*

- HD format (widescreen)
- Supports videoconferencing and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range

* HD content required to view HD images.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

Optional backlit keyboard with Function key control to toggle backlit brightness setting - off/full/half brightness

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 100-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, function keys, and 18.0 x 18.4 mm key pitch (center-to-center spacing). U.S. and International key layouts are available. Other features include hot keys for instant access to power conservation and brightness.

Pointing Devices

Touchpad with On/Off button, two-way scroll, gestures, two pick buttons

Point stick with two additional point stick buttons

Image sensor touchpad for enhanced performance and improved precision on scroll and gesture

Buttons and Function Keys

Separate launch buttons provide easy access to the following features: wireless on/off, volume mute. Function keys provide control of the following features: standby mode, external display, volume down, volume up, HP Power Assistant (Windows® 7 only), and display brightness.

Features

SOFTWARE AND SECURITY

Preinstalled Software with Windows Operating System

BIOS

- HP BIOSphere¹
- HP Sure Start with Dynamic Protection
- HP DriveLock¹⁸ | HP Automatic DriveLock
- HP BIOS Protection²
- BIOS Update via Network
- Master Boot Record Security
- Power On Authentication
- Pre-Boot Security
- HP Spare Key¹⁷
- Secure Erase³
- Hybrid Boot
- Measure Boot
- Secure Boot
- Absolute Persistence Module⁴
- Pre-boot Authentication

Multi Media

- Cyberlink Power DVD, BD (supports file playback)
- Cyberlink YouCam BE (Windows 7 only)

Communication

- HP GPS and Location (Windows 7 only)⁵
- HP Connection Manager with support for HP Mobile Connect (Windows 7 only)⁶
- HP Mobile Connect Pro (Windows 8.1 and Windows 10 only)⁶
- Intel® Wireless Display (WiDi) Software for Windows⁷
- Native Miracast Support⁸

HP Value Add Software

- HP 3D DriveGuard
- HP ePrint Driver⁹
- HP Hotkey
- HP Recovery Manager¹⁶
- HP Recovery Disc Creator
- HP Registration App (Windows 8.1 only)
- HP Support Assistant
- HP Noise Reduction Software
- HP Performance Advisor
- HP Remote Graphics Software
- HP Velocity

3rd Party

- Foxit PhantomPDF Express for HP

Microsoft Products

- Buy Office
- Bing Search
- Skype¹⁰

Manageability

- HP Driver Packs¹¹

Features

HP SoftPaq Download Manager (SDM)
HP System Software Manager (SSM)¹¹
HP BIOS Config Utility (BCU)¹¹
HP Client Catalog¹¹
HP CIK for Microsoft SCCM¹¹
HP Image Assistant¹¹
LANDESK Management¹²

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

Client Security Software

HP Client Security

- HP Security Manager (including Credential Manager and Password Manager)
- HP Drive Lock
- HP Fingerprint Sensor
- HP Password Manager
- Absolute Persistence Module
- Power On Authentication

Microsoft Security Essentials¹⁴

Microsoft Defender¹⁴

Standard

Trusted Platform Module (TPM) 1.2 Embedded Security Chip (Common Criteria EAL4+ Certified). Field upgradeable to TPM 2.0¹⁵

HP Fingerprint Reader

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

1 Available only on business PCs with HP BIOS.

2 May require a manual recovery step if all copies of BIOS are compromised or deleted

3 For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.

4 Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription.

Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

5 GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.

6 HP Mobile Connect Pro is only available on preconfigured devices with WWAN. For geographic availability refer to <http://www.hp.com/go/mobileconnect>

7 Integrated Intel® Wi-Di feature is available on select configurations only and requires separately purchased projector, TV or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, TV or computer monitor via a standard HDMI cable, also sold separately.

8 Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>

9 Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/eprintcenter>). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

10 Skype is not offered in China.

11 Not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>

12 Subscription required.

14 Opt in and internet connection required for updates.

Features

15 This product ships with TPM 1.2 with option to upgrade to TPM 2.0. Upgrade utility is expected to be available by the end of 2015 via HP Customer Support

16 Models shipped with Windows 7 include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 36 GB (for Windows 7) of system and up to 36 GB (for Windows 10) disk is reserved for system recovery software

17 Requires initial user setup

18 DriveLock feature only supported with SATA drives. DriveLock feature not supported on HP Z Turbo Drive PCIe SSDs.

Workstation ISV Certifications

Find the latest list of certifications at: <http://www.hp.com/go/isv>

HP Remote Graphics Software

The remote desktop solution for serious workstation users and their most demanding applications.

Download at: <http://www.hp.com/go/RGS>

HP Performance Advisor

HP Performance Advisor enables optimal configuration of HP Mobile Workstations delivering stability and best performance. HP Performance Advisor will guide your system setup allowing a "custom" configuration that best matches the workstation to user requirements.

Download at: <http://www.hp.com/go/performanceadvisor>

Security

See Software section above.

Other Standard Security Features

Integrated Smart Card Reader

One-Step Logon

Security lock slot

Support for Intel® AT

Optional Security Features

HP Fingerprint Sensor (optional)

Absolute Data Protect* with GPS Tracking - Subscription based security solution providing the ability to track, initiate physical recovery, conduct asset management, and perform remote data delete by utilizing GPS technology. GPS functionality requires HP Mobile Broadband Module.

* The Absolute Data Protect agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S.

HP CENTRAL MANAGEMENT

HP offers a variety of scalable hardware, software, and BIOS-based security features to help you defend your organization against viruses and other threats. These integrated security features safeguard what matters to you the most - your data, device and identity. Now, be confident your fleet of devices is protected in multiple layers of HP Client Security protection.

HP BIOS Protection keeps you up and running with enhanced protection against virus attacks and other threats. And if the BIOS is accidentally compromised, the auto recovery feature automatically restores it to its fully functional state.

HP Sure Start detects and negates a BIOS attack with automatic recovery of the BIOS even when the installation is accidentally compromised (i.e. power outage). When HP Sure Start heals the BIOS an event log is generated that an IT administrator can retrieve so the business is aware of a BIOS attack. Golden copy of BIOS is stored in protected nonvolatile

Features

memory providing redundant, hardware-based protection against a new generation of attacks. This helps to future-proof your technology and business.

An optional fingerprint reader and integrated Smart Card Reader help keep your identity secure. The security cable slot helps keep your notebook physically secure.

You can even permanently destroy data on your hard drive in preparation for your system disposal or redeployment with Secure Erase.

POWER

Power Supply

HP 65W Slim Smart AC Adapter

Primary Battery

HP 3-cell Long Life Polymer Battery (46 WHr)

Battery Life

Battery life up to 10 hours *

NOTE: Battery is internal and not replaceable by the customer

System Standby Time

Up to TBD weeks**

*Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark14 battery benchmark <https://bapco.com/products/mobilemark-2014/> for additional details.

** Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

Power Conservation

AMD® Enduro™ Technology

Hibernation

Standby

ACPI compliance

ENVIRONMENTAL

US ENERGY STAR®

IT ECO declaration

EPEAT® registered where applicable. EPEAT® registration varies by country. See <http://www.epeat.net> for registration status by country.

NOTE: This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks.

Features

WEIGHTS & DIMENSIONS

Weight

Starting at 4.18 lb. (1.89 kg)

Dimensions (w x d x h)

15.09 x 10.15 x 0.78 in

383.3 x 257.7 x 19.9 mm

NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 3 cell 46Whr battery, without hard drive and with 256 GB Z Turbo Drive (PCIe SSD).

Features

PORTS/SLOTS

Ports

Left side:

- (1) VGA
- (1) USB 3.0 Charging Port
- (1) Security lock slot

Right side:

- (1) USB 3.1 Gen 1
- (1) USB 3.0 Port
- (1) DisplayPort 1.2
- (1) Headphone/Microphone Combo
- (1) RJ-45 / Ethernet
- (1) Side Docking connector
- (1) Power connector

Digital Media Slots

- (1) SD UHS-II Flash Media slot – Supports next generation SD (Secure Digital), backward compatible to SDHC, SDXC
 - (1) Integrated Smart Card Reader (Compatible with ISO 7816 compliant Smart Cards PC/SC interface support)
-

SERVICE AND SUPPORT

Limited 3-year or 1-year limited warranty options available, depending on country. Batteries have a default one year limited warranty except for Long Life batteries which will have same 1-year or 3-year limited warranty as the platform. Optional¹ HP Care Pack Services are extended service contracts which go beyond your standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at <http://www.hp.com/go/cpc>.

Sold separately or as an optional feature.

1. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product. Consult your local HP Customer Support Center for details.
-

Technical Specifications – System Unit

SYSTEM UNIT

Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	19.5 V dc @ 3.3 A		
	Average Operating Power		Windows® 7 (32-bit)	Windows® 7 (64-bit)
		AMD® FirePro® Graphics	16.28 W	16.8 W
Temperature	Max Operating Power	< 65 W		
	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)		
Relative Humidity	Non-operating	-4° to 140° F (-20° to 60° C)		
	Operating	10% to 90%, non-condensing		
Shock	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature		
	Operating	40 G, 2 ms, half-sine		
Random Vibration	Non-operating	200 G, 2 ms, half-sine		
	Operating	0.75 grms		
Altitude (unpressurized)	Non-operating	1.50 grms		
	Operating	-50 to 10,000 ft. (-15.24 to 3,048 m)		
Planned Industry Standard Certifications	Non-operating	-50 to 40,000 ft. (-15.24 to 12,192 m)		
	UL	Yes		
	CSA	Yes		
	FCC Compliance	Yes		
	ENERGY STAR®	Select models*		
	EPEAT	Gold target**		
	ICES	Yes		
	Australia / NZ A-Tick Compliance	Yes		
	CCC	Yes		
	Japan VCCI Compliance	Yes		
	KCC	Yes		
BSMI	Yes			
CE Marking Compliance	Yes			
MIL STD	Planned			

* Configurations of the HP ZBook 15u G3 that are ENERGY STAR® qualified are identified as HP ZBook 15u G3 ENERGY STAR® on HP websites and on <http://www.energystar.gov>.

** EPEAT registration varies by country. See <http://www.epeat.net> for registration status by country.

EPEAT status listed above applies to U.S.

*** MIL STD 810G testing is pending and is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Damage under the MIL STD test conditions or any accidental damage requires an optional HP Accidental Damage Protection Care Pack.

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

Technical Specifications – Displays

DISPLAYS

15.6" diagonal LED-backlit FHD UWVA IPS eDP anti-glare + Panel Self Refresh (PSR) (1920 x 1080)

Dimensions (W x H)	13.54 x 7.64 in (34.4x19.4 cm)
Diagonal Size	15.6 in (39.6 cm)
Weight	360g (max)
Surface Treatment	Anti-glare
Contrast Ratio	600:1 (typical)
Refresh Rate	60 Hz
Brightness	300 nit (typical)
Pixel Resolution	Format 1920 x 1080 (FHD)
	Configuration RGB Stripe
Backlight	LED
PPI	142
Viewing Angle	80° Horizontal, ±80° Vertical (minimum) 80/80/80/80 (Left/Right/Down/Up) (min)

15.6" diagonal LED backlight FHD eDP SVA Anti-glare (1920 x 1080)

Outline Dimensions (W x H x D)	360.0 x 224.3 x 3.2 mm max
Active Area	344.16 x 193.59 mm
Weight	360 max.
Diagonal Size	15.6"
Surface Treatment	AG
Contrast Ratio	400:1 (typ)
Refresh Rate	60Hz
Brightness	300nits
Pixel Resolution	Format 1920 x 1080 (FHD)
	Configuration RGB Stripe
Interface	eDP 1.2 (2 lane)
LCD Mode	TN
PPI	142
Viewing Angle	SVA 45/45/25/35

15.6" diagonal LED backlight FHD Slim DP SVA (1920 x 1080) Touch with Camera

Outline Dimensions (W x H x D)	360.0 x 224.3 x 3.2 mm max
Active Area	344.16 x 193.59 mm
Weight	360 max.
Diagonal Size	15.6"
Surface Treatment	AG/BV
Contrast Ratio	500:1 (typ) - BV, 400:1 (typ) - AG
Touch Enabled	Yes
TSP Type	Capacitive
Refresh Rate	60Hz

Technical Specifications – Displays

15.6-inch UHD UWVA IPS LED anti-glare (3840 x 2160)	Brightness	300nits	
	Pixel Resolution	Format	1920 x 1080 (FHD)
		Configuration	RGB Stripe
	Interface	eDP 1.2 (2 lane)	
	LCD Mode	TN	
	PPI	142	
	Viewing Angle	SVA 45/45/25/35	
	Active Area (W x H)	13.54 x 7.59 in (34.4 x 19.4 cm)	
	Dimensions (W x H)	15.6 in (39.6 cm)	
	Weight	380 g (max)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	400:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	270 nit typical	
Pixel Resolution	Format	1920 x 1080 (FHD)	
	Configuration	RGB Stripe	
Backlight	LED		
PPI	141		
Viewing Angle	85/85/85/85 (Left/Right/Down/Up) (typical)		

Technical Specifications – Storage

STORAGE AND DRIVES*

500 GB 5400rpm Self Encrypting Drive (FIPS-140-2) (Opal 2)	Drive Weight	0.21 lbs (95 g)	
	Capacity	500 GB	
	Height	0.28 in (7 mm)	
	Width	2.75 in (69.85 mm)	
	Interface	ATA-8, SATA 3.0	
	Transfer Rate	Synchronous (maximum) 600 MB/s	
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	12ms
		Maximum	18mm-22ms
	Cache	32GB	
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [top cover temp]	
	Features	ATA Security; TCG Opal 2.x, FIPS, S.M.A.R.T., NCQ, Ultra DMA ,	
500 GB 7200rpm Hard Drive	Drive Weight	0.20 lbs (92 g)-0.21 lbs (95 g)	
	Capacity	500 GB	
	Height	0.28 in (7 mm)	
	Width	2.75 in (69.85 mm)	
	Interface	ATA-8, SATA 3.0	
	Transfer Rate	Synchronous (maximum) 600 MB/s	
	Seek Time (typical reads, including settling)	Single Track	1.5ms-2.0ms
		Average	11ms-13ms
		Maximum	18ms-22ms
	Cache	32GB	
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	
500 GB 7200rpm Self-Encrypting Drive (Opal 2)	Drive Weight	0.21 lbs (95 g)	
	Capacity	500GB	
	Height	0.28 in (7 mm)	
	Width	2.75 in (69.85 mm)	
	Interface	ATA-8, SATA 3.0	
	Transfer Rate	Synchronous (maximum) 600 MB/s	
	Seek Time (typical reads, including settling)	Single Track	1.5ms
		Average	12ms
		Maximum	18ms- 22ms
	Cache	32GB	
	Rotational Speed	7200rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [top cover temp]	
	Features	ATA Security; TCG Opal 2.x, S.M.A.R.T., NCQ, Ultra DMA	
1 TB 5400rpm Hard Drive	Drive Weight	0.21 lbs (94 g)- 0.21 lbs (99 g)	

Technical Specifications – Storage

	Capacity	1TB		
	Height	0.28 in (7.2 mm)		
	Width	2.75 in (69.85 mm)		
	Interface	ATA-8, SATA 3.0		
	Transfer Rate	Synchronous (maximum) 600 MB/s		
	Seek Time	Single Track 2ms		
	(typical reads, including settling)	Average 12ms-13ms		
		Maximum 18ms-23ms		
	Cache	Up to 32GB		
	Rotational Speed	5400rpm		
	Logical Blocks	1,953,525,168		
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]		
	Features	S.M.A.R.T., NCQ, Ultra DMA		
500 GB Hybrid, 8 GB cache	Drive Weight	0.21 lb (95 g)		
	Capacity	500 GB		
	Height	0.276 in (7 mm)		
	Width	2.76 in (70.1 mm)		
	Interface	ATA-8, SATA 2.6, 6.0 Gb/s, NCQ		
	Transfer Rate	Synchronous (maximum) 600 MB/s (Drive Capability)		
	Seek Time	Single Track 2 ms		
	(typical reads, including settling)	Average 12 ms		
		Maximum NIL ms		
	Cache	64GB		
	Rotational Speed	5400 rpm		
	Logical Blocks	976,773,168		
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]		
Features	ATA Security			
128 GB M2 2280 SATA-3 TLC Solid State Drive	Drive Weight	0.019 lb (8.5 g)-0.022 lb (10 g)		
	Capacity	128 GB		
	Height	0.09 in (2.23 mm)- 0.14 in (3.58 mm)		
	Width	0.87 in (22 mm)		
	Interface	ATA-8, SATA 3.0		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		Up to 540 MB/s	Up to 300 MB/s	
	Logical Blocks	250,069,680		
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]		
	Features	ATA Security, DIPM; TRIM; DEVSLP		
	256 GB M2 2280 SATA-3 Self-Encrypting Drive (Opal 2) MLC Solid State Drive	Drive Weight	0.02 lb (10 g)	
		Capacity	256 GB	
		Height	0.14 in (3.58 mm)- 0.09 in (2.23 mm)	
Width		0.87 in (22 mm)		
Interface		ATA-8, SATA 3.0		

Technical Specifications – Storage

HP Z Turbo Drive 512 GB, M.2 NVMe PCIe Solid State Drive	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 540 MB/s	UP to 460 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security; TCG Opal 2.0, DIPM; TRIM; DEVSLP	
	Drive Weight	0.022 lb (<10 g)	
	Capacity	512 GB	
	Height	0.14 in (3.7 mm)	
	Width	0.87 in (22 mm)	
	Generation	SM951 NVMe	
	NAND Type	MLC	
	Form-Factor (I/O)	M.2 2280	
	Interface	PCIe GEN3X4	
Performance	Maximum Sequential Read	Maximum Sequential Write	
	Up to 2260MB/s	Up to 1600MB/s	
Logical Blocks	1,000,215,216		
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]		
Features	ATA Security, TRIM; L1.2		

Technical Specifications – Storage

HP Z Turbo Drive 256 GB, M.2 NVMe PCIe Solid State Drive	Drive Weight	0.022 lb (<10 g)	
	Capacity	256 GB	
	Height	0.09 in (2.3 mm)	
	Width	0.87 in (22 mm)	
	Generation	SM951 NVMe	
	NAND Type	MLC	
	Form-Factor (I/O)	M.2 2280	
	Interface	PCIe GEN3X4	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 2260MB/s	Up to 1260 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
	Features	ATA Security, TRIM; L1.2	

*For hard drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows® 7) of system and up to 30 GB (for Windows® 8) disk is reserved for system recovery software.

Technical Specifications – Security

SECURITY

HP Fingerprint Sensor	Voltage	3.0-3.6V
	Operating temperature	14° - 167°F (-10° - 75°C)
	Current consumption image	36mA
	Low latency wait for finger	950 uA
	Capture rate	3000 lines/sec
	ESD Resistance	IEC 6100-4-2 4B (+/-15KV)
	Detection Matrix	200*1 (plus another secondary line); 508 dpi, sensor area 12*3 mm

Technical Specifications – Networking

NETWORKING/COMMUNICATION

Intel® I219-LM Gigabit Network Connection (vPro configurations)

Ethernet Features

10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
 100 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3. Clauses 40)
 Auto-Negotiation (Automatic Speed Selection)
 Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
 IEEE 802.1p QoS (Quality of Service) Support
 IEEE 802.1q VLAN support
 IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
 IEEE 802.3az EEE(Energy Efficient Ethernet)
 Jumbo Frame 9K
 Auto MDI/MDIX Crossover cable detection

Power Management

ACPI compliant - multiple power modes
 Energy Detect Low Power Mode(Green Ethernet)

Performance Features

TCP/IP/UDP Checksum Offload (configurable)
 Protocol Offload(ARP & NS)
 Large send offload and Giant send offload
 Receiving Side Scaling
 MACSec Offload (802.3ae)

Manageability

Intel® vPro
 iSCSI Boot
 RSS is kernel based support (e.g. in Win Server 2013)
 Ultra Low Power at cable disconnect (<1mW) enables platform support for connected standby.
 Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)
 PXE 2.1 Remote Boot
 Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))
 Comprehensive diagnostic and configuration software suite
 Virtual Cable Doctor for Ethernet cable status

Interface

PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ.
NOTE: Intel® I219-LM Gigabit interface is not PCIe compliant. It operates at half of PCIe specification V1.1 (2.5GT/S) speed.

NIC Device Driver Name

Intel® Ethernet Network Connection I219-LM

Technical Specifications – Networking

**Intel® I219-V Gigabit
Network Connection
(Non-vPro configurations)**

Ethernet Features

10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
100 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 802.3 Clauses 40)
Auto-Negotiation (Automatic Speed Selection)
Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
IEEE 802.1p QoS (Quality of Service) Support
IEEE 802.1q VLAN support
IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
IEEE 802.3az EEE(Energy Efficient Ethernet)
Jumbo Frame 9K
Auto MDI/MDIX Crossover cable detection

Power Management
ACPI compliant - multiple power modes
Energy Detect Low Power Mode(Green Ethernet)

Performance Features
TCP/IP/UDP Checksum Offload (configurable)
Protocol Offload(ARP & NS)
Large send offload and Giant send offload
Receiving Side Scaling
MACSec Offload (802.3ae)
Intel Non-vPro
iSCSI Boot

Manageability
Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)
PXE 2.1 Remote Boot
Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))
Comprehensive diagnostic and configuration software suite
Virtual Cable Doctor for Ethernet cable status

Interface
PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ.
NOTE: Intel 82579 PCIe interface is not PCIe compliant. It operates at half of PCIe specification V1.1 (2.5GT/S) speed.

NIC Device Driver Name
Intel 82579LM/82579V Ethernet Network Connection

Technical Specifications – Networking

**HP It4120 Qualcomm®
Snapdragon™ X5 LTE Mobile
Broadband Module***

Technology/Operating Bands	LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3), 1700/2100 (Band 4), 850 (Band 5), 2600 (Band 7), 900 (Band 8), 700 (Band 12 lower), 700 (Band 13 upper), 700 (Band 17 lower), 800 (Band 20), 700 (Band 28). HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz EV-DO: 850 (BC0), 1900 (BC1) MHz (Only work with Verizon network) E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
Wireless Protocol Standards	3GPP Release 10 LTE Specification CAT.4, 20MHz BW WCDMA R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification 1xEVDO Release 0, A and B. E-GPRS: Class B, Multi-slot class 12, coding schemes CS1 - CS4 and MSC1 - MSC9
GPS	Standalone, A-GPS (MS-A, MS-B and XTRA)
GPS Bands	1575.42 MHz (± 1.023 MHz), GLONASS 1596-1607MHz
Maximum Data Rates	LTE: 150 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21Mbps (Download), 5.76 Mbps (Upload) CDMA 1xRTT: 153.6 kbps (Download), 153.6 kbps (Upload) EVDO Rel.A: 3.1 Mbps (Download), 1.8 Mbps (Upload) EVDO Rel.B: 14.7 Mbps (Download), 5.4Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
Maximum Output Power	LTE: 23 dBm HSPA+: 23.5 dBm 1xRTT/EVDO: 24dBm E-GPRS 1900/1800: 26 dBm E-GPRS 900/850: 27 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm
Maximum Power Consumption	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) 1xRTT/EVDO: 1,000 mA (peak); 700 mA (average)
Form Factor	M.2, 3042-S3 Key B
Weight	6.2 g
Dimensions (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

* Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products or in all countries.

Technical Specifications – Networking

HP hs3110 HSPA+ Intel® Mobile Broadband Module*	Technology/Operating Bands	LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 2600 (Band 7), 900 (Band 8), 800 MHz (Band 20, DD800) MHz HSPA+: 2100 (Band 1), 1900 (Band 2), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
	Wireless Protocol Standards	WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification E-GPRS: Class B, Multi-slot class 33, coding schemes CS1 - CS4 and MSC1 - MSC9
	GPS	Standalone, A-GPS
	GPS Bands	1575.42 MHz (± 1.023 MHz)
	Maximum Data Rates	HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) E-GPRS: 296 kbps (Download), 236.8 kbps (Upload) GPRS: 107 kbps (Download), 85.6 kbps (Upload)
	Maximum Output Power	HSPA+: 24 dBm E-GPRS 1800/1900: 26 dBm E-GPRS 850/900: 27 dBm GPRS 1800/1900: 30 dBm GPRS 850/900: 33 dBm
	Maximum Power Consumption	HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,800 mA (peak); 700 mA (average)
	Form Factor	M.2, 3042-S3 Key B
	Weight	6 g
	Dimensions (Length x Width x Thickness)	1.65 x 1.18 x 0.09 in (42 x 30 x 2.3 mm)

*Mobile Broadband is an optional feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products or in all countries.

Technical Specifications – Networking

<p>Intel® Dual Band Wireless-AC 8260 802.11 AC/a/b/g/n (2x2) WiFi + Bluetooth® 4.2 Combo Adaptor* (vPro)</p>	<p>Wireless LAN Standards</p>	<p>IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11n</p>
	<p>Interoperability</p>	<p>Wi-Fi certified</p>
	<p>Frequency Band</p>	<p>802.11b/g/n 2.402 - 2.482 GHz Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels</p> <p>802.11a 4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)</p>
	<p>Data Rates</p>	<ul style="list-style-type: none"> • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
	<p>Modulation</p>	<p>Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</p>
	<p>Security¹</p>	<ul style="list-style-type: none"> • IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI
	<p>Network Architecture Models</p>	<p>Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)</p>
	<p>Roaming</p>	<p>IEEE 802.11 compliant roaming between band Access Points</p>
	<p>Output Power²</p>	<ul style="list-style-type: none"> • 802.11b : +16dBm minimum • 802.11g : +14dBm minimum • 802.11a : +14dBm minimum • 802.11n HT20(2.4GHz) : +13dBm minimum • 802.11n HT40(2.4GHz) : +13dBm minimum • 802.11n HT20(5GHz) : +12dBm minimum • 802.11n HT40(5GHz) : +12dBm minimum
	<p>Power Consumption</p>	<p>Transmit: 2.0 Watts (max) Receive: 1.6 Watts (max)</p>

Technical Specifications – Networking

	<p>Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated) Connect Standby: 10mW (WLAN + BT) Radio disabled: 5 mW</p>				
Power Management	<p>ACPI and PCI Express compliant power management 802.11 compliant power saving mode</p>				
Receiver Sensitivity³	<p>802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -88dBm maximum 802.11a, 54Mbps : -74dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum</p>				
Antenna Type	<p>High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO and Bluetooth communications</p>				
Form Factor	<p>PCI-Express M.2 MiniCard</p>				
Dimensions	<p>Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm</p>				
Weight	<p>Type 2230 : 2.8g Or Type 1630 : 2g</p>				
Operating Voltage	<p>3.3v +/- 9%</p>				
Temperature	<table> <tr> <td>Operating</td> <td>14° to 158° F (-10° to 70° C)</td> </tr> <tr> <td>Non-operating</td> <td>-40° to 176° F (-40° to 80° C)</td> </tr> </table>	Operating	14° to 158° F (-10° to 70° C)	Non-operating	-40° to 176° F (-40° to 80° C)
Operating	14° to 158° F (-10° to 70° C)				
Non-operating	-40° to 176° F (-40° to 80° C)				
Humidity	<table> <tr> <td>Operating</td> <td>10% to 90% (non-condensing)</td> </tr> <tr> <td>Non-operating</td> <td>5% to 95% (non-condensing)</td> </tr> </table>	Operating	10% to 90% (non-condensing)	Non-operating	5% to 95% (non-condensing)
Operating	10% to 90% (non-condensing)				
Non-operating	5% to 95% (non-condensing)				
Altitude	<table> <tr> <td>Operating</td> <td>0 to 10,000 ft (3,048 m)</td> </tr> <tr> <td>Non-operating</td> <td>0 to 50,000 ft (15,240 m)</td> </tr> </table>	Operating	0 to 10,000 ft (3,048 m)	Non-operating	0 to 50,000 ft (15,240 m)
Operating	0 to 10,000 ft (3,048 m)				
Non-operating	0 to 50,000 ft (15,240 m)				
LED Activity	<p>LED Amber – Radio OFF; LED White – Radio ON</p>				

Technical Specifications – Networking

HP Integrated Module with Bluetooth® 4.0+EDR Wireless Technology	Bluetooth® Specification	4.0/4.1/4.2 Compliant												
	Frequency Band	2402 to 2480 MHz												
	Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)												
	Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)												
	Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR												
	Receiver Sensitivity	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>$\pi/4$-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
	Modulation	0.01% BER	0.001% BER											
	GFSK	-80 dBm	-70 dBm											
	$\pi/4$ -DQPSK	-80 dBm	-70 dBm											
	8DPSK	-80 dBm	-70 dBm											
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW													
Antenna	Internally integrated within module													
Range	Legacy Up to 33 ft (10 m) BLE Up to 99 ft (30 m)													
Electrical Interface	USB 2.0 compliant													
Bluetooth® Software Supported	Microsoft Windows Bluetooth Software													
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves													
Security	Full support of Bluetooth Security Provisions													
Power Management	Microsoft Windows ACPI, and USB Bus Support													
Certifications	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff													
Security	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249													
Power management certifications	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark													
Certifications	Serial Port Profile (SPP)1													
Bluetooth® Profiles Supported	Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN)1,2 Generic Object Exchange Profile (GOEP)1,2 Object Push Profile (OPP)1,2 Hard Copy Cable Replacement (HCRP)1,2 Personal Area Networking Profile (PAN)1,2 Human Interface Device Profile (HID)1,2 Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Audio Video Remote Control Profile (AVRCP)													

Technical Specifications – Networking

Bluetooth® V4.1/V4.2 support feature V4.1: ESR5/6/7 compliant
V4.2: ESR8 compliant, LE Secure Connection – Basic.

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Technical Specifications – Networking

Intel® Dual Band Wireless-AC 8260 802.11 AC/a/b/g/n (2x2) WiFi + Bluetooth® 4.2 Combo Adaptor* (non-vPro)	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac Wi-Fi certified 802.11b/g/n
	Interoperability Frequency Band	2.402 - 2.482 GHz Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels
		802.11a <ul style="list-style-type: none"> 4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)
	Antenna Structure	2 transmit; 2 receive (2x2)
	Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: card will support rates for NSS=1 and NSS=2 for RX and TX for 20 and 40 MHz channels. Short and long guard interval shall be supported. 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
	Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
	Security¹	<ul style="list-style-type: none"> IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only AES-CCMP: 128 bit in hardware 802.1x authentication WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification IEEE 802.11i Cisco Certified Extensions, all versions through CCX4 and CCX Lite WAPI
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power²	<ul style="list-style-type: none"> 802.11b : +16dBm minimum 802.11g : +14dBm minimum 802.11a : +14dBm minimum

Technical Specifications – Networking

- 802.11n HT20(2.4GHz) : +13dBm minimum
- 802.11n HT40(2.4GHz) : +13dBm minimum
- 802.11n HT20(5GHz) : +12dBm minimum
- 802.11n HT40(5GHz) : +12dBm minimum
- 802.11ac 80MHz(5GHz) : +11dBm minimum

Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps) 802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11n:-69 dBm (150 Mbps), -66 dBm (300 Mbps)
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express Half-MiniCard
Dimensions	0.134 x 1.06 x 1.18 in (3.4 x 26.8 x 30 mm)
Weight	3.1g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft. (3,048 m) Non-operating 0 to 50,000 ft. (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON

1. Check latest software/driver release for updates on supported security features.

2. Maximum output power may vary by country according to local regulations.

3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

HP Integrated Module with Bluetooth® 4.0+EDR Wireless Technology

Bluetooth Specification	4.0+EDR Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps

Technical Specifications – Networking

	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR
Receiver Sensitivity	Better than -20 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW
Antenna	Internally integrated within module
Range	Up to 33 ft. (10 m)
Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
Bluetooth® Software Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth® Profiles Supported	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

1. Indicates the profile is supported by Microsoft Windows XP SP2

2. Indicates the profile is part of Windows Vista

* Wireless access point and internet service required. Availability of public wireless access points limited.

Technical Specifications – Networking

<p>Intel® Dual Band Wireless-AC 3160 802.11 ac (1x1) WiFi and Bluetooth® 4.0 Combo Adapter (non-vPro)</p>	<p>Wireless LAN Standards</p>	<p>IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac</p>
	<p>Interoperability</p>	<p>Wi-Fi certified</p>
	<p>Frequency Band</p>	<p>802.11b/g/n</p> <ul style="list-style-type: none"> • 2.402 – 2.482 GHz
		<p>Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p>
		<p>802.11a/n</p> <ul style="list-style-type: none"> • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz
		<p>Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)</p>
	<p>Data Rates</p>	<ul style="list-style-type: none"> • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac : MCS0 ~ MCS7, (1SS) (20MHz, 40MHz, and 80MHz)
	<p>Modulation</p>	<p>Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM</p>
	<p>Security¹</p>	<ul style="list-style-type: none"> • IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI
	<p>Network Architecture Models</p>	<p>Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)</p>
	<p>Roaming</p>	<p>IEEE 802.11 compliant roaming between access points</p>
	<p>Output Power²</p>	<ul style="list-style-type: none"> • 802.11b : +16dBm minimum • 802.11g : +14dBm minimum • 802.11a : +14dBm minimum • 802.11n HT20(2.4GHz) : +13dBm minimum • 802.11n HT40(2.4GHz) : +13dBm minimum • 802.11n HT20(5GHz) : +12dBm minimum • 802.11n HT40(5GHz) : +12dBm minimum • 802.11ac 80MHz(5GHz) : +11dBm minimum
	<p>Power Consumption</p>	<p>Transmit: 2.0 W (max)</p>

Technical Specifications – Networking

	Receive: 1.6 W (max)
	Idle mode (PSP): 180 mW (WLAN Associated)
	Idle mode: 60 mW (WLAN unassociated)
	Radio disabled: 30 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
Weight	Type 2230 : 2.8g Or Type 1630 : 2g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating 40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)

Technical Specifications – Audio

AUDIO/MULTIMEDIA – BANG & OLUFSEN

Hardware	Implementation	Conexant CX7501
	Function Key	Volume up, volume down, and mute
	Volume Controls	
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, dual digital microphone array when equipped with optional webcam

Audio Output Quality	Frequency Response	20 Hz - 20 kHz
	Signal to Noise Ratio	106dB (DAC), 102dB (ADC)
	Total Harmonic Distortion	91dB THD+n on LineOut/HP (0.003%)
	Noise Floor	-110 dB
	Play Sampling Rate(s)	Up to 192kHz
	Record Sampling Rate(s)	Up to 96kHz
	DAC	16, 20 or 24-bit
	ADC	16,20 or 24-bit

Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Technical Specifications – Power

POWER

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)	
	Weight	0.62 lb. (280 g)	
	Input	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC/230VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC
	Output	Output power	65W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft. (0 to 3,048 m)
		Humidity	20% to 80%
	Storage Humidity	10% to 90%	
EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.		

HP Long Life 3-cell Polymer Battery (46Whr)	Dimensions (H x W x L)	7.8 x 4.01 x 0.3 in(19.89x10.28x0.84 cm)		
	Weight	280 g		
	Cells/Type	3-cell Lithium-Ion Polymer		
	Energy	Voltage	11.1	
		Amp-hour capacity	4.504Ah	
		Watt-hour capacity	46Wh	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F(-10° to 60° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	Battery Re-Charge Time	System in OFF or Standby Mode	3 hours	
Fuel Gauge LED	No			

Technical Specifications – Power

Warranty	1 year or 3 years* *Battery warranty depends on the platform warranty.
Optional Travel Battery Available	No

ENVIRONMENTAL DATA

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT <Gold> registered in the United States. See <http://www.epeat.net> for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a “Typically Configured Notebook”.

Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	9.06 W	9.98 W	9.6 W
Normal Operation (Long idle)	7.31 W	7.82 W	8.0 W
Sleep	0.76 W	0.89 W	0.75 W
Off	0.44 W	0.56 W	0.43 W

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	31 BTU/hr	34 BTU/hr	33 BTU/hr
Normal Operation (Long idle)	25 BTU/hr	27 BTU/hr	27 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	2 BTU/hr	2 BTU/hr	1 BTU/hr

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (L _{WAd} , bels)	Sound Pressure (L _{pAm} , decibels)
Typically Configured – Idle	2.9	20
Fixed Disk – Random writes	2.9	21

Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

Technical Specifications – Power

- 1 USB 3.1 Gen 1
- 1 USB 3.0 Port
- 1 DisplayPort 1.2
- 1 SD UHS-II Flash Media slot
- 1 Integrated Smart Card Reader

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:
Mercury greater than 1ppm by weight
Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)
Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0% post-consumer recycled plastic (by wt.)
- This product is 96.1% recycle-able when properly disposed of at end of life.

Packaging Materials

External:	PAPER/Cardboard & misc	360.2 g
Internal:	PLASTIC/EPE (Expanded Polyethylene)	29.8 g
	PLASTIC/Polyethylene low density	13.6 g
	PLASTIC/Polypropylene	6 g

The plastic packaging material contains at least 50% recycled content.

The corrugated paper packaging materials contains at least 70% recycled content.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes

Technical Specifications – Power

- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

Technical Specifications – Power

Country of Origin

China

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
Memory	HP 4GB DDR4-2133 SODIMM (Core processors only)	T7B76AA
	HP 8GB DDR4-2133 SODIMM (Core processors only)	T7B77AA
Cases	HP Executive 15.6 Black Top Load	P6N18AA
	HP Business Case (up to 15.6")	H5M92AA
Docking	HP UltraSlim Docking Station	D9Y32AA
	HP 2013 UltraSlim Docking Station TAA US	E5C22AV#ABA
	HP Executive Travel Hub	TOK29AA
	HP Travel Hub	TOK30AA
	HP 3005pr USB 3.0 Port Replicator	H1L08AA
	HP Display and Notebook Stand II	E8G00AA#xxx
	HP USB-Type C™ Elite Dock	X7W54AA
Input/Output - Mice	Comfort Grip Mouse	H2L63AA
	HP Stylish USB KB/Mouse	H4B80AA#xxx
	HP Slim Bluetooth Keyboard	H4Q44AA#xxx
	HP 3-Button Laser Mouse	H4B81AA#xxx
	HP USB Essential Keyboard and Mouse	H6L29AA#xxx
	HP Ultra Mobile Wireless Mouse	H6F25AA#xxx
	HP Wireless Keyboard and Mouse	G1K29AA#xxx
	HP X4000 Bluetooth Mouse	H3T50AA#xxx
	HP Slim Bluetooth Mouse	F3J92AA#xxx
	HP USB Smart Card Reader	F6V67AA
	HP Ultrathin Wireless Mouse	L9V78AA
	HP Stylish Wireless Keyboard and Mouse	H4B79AA#xxx
	HP Wireless (Link-5) Keyboard	T6U20AA#xxx
	HP Touch to Pair Mouse	H6E52AA#xxx
	HP USB Travel Mouse	G1K28AA#xxx
	DisplayPort to DVI Adapter	F7W96AA
	DisplayPort to VGA	F7W97AA
	DisplayPort to HDMI 1.4 Adapter	F3W43AA
	USB-C to USB 3.0	N2Z63AA#xxx
	7.4 to 4.5mm Adapter	KOQ39AA
HP Stereo 3.5mm Headset	T1A66AA	
HP Stereo USB Headset	T1A67AA	
Power Adapters	HP 65W Slim A/C Adapter	H6Y82AA
	HP 90W Slim A/C Adapter	H6Y83AA
	HP 90W Slim Combo AC Adapter w/USB	H6Y84AA
	HP 65W Smart AC Adapter	H6Y89AA
	HP 90W Smart AC Adapter	H6Y90AA
	45W 2-prong 4.5 mm DC jack AC Adapter	L6F60AA#ABJ

Options and Accessories (sold separately and availability may vary by country)

	HP Long Life Li-Ion Battery 46 WHr (4.0 Ahr)	T7B32AA
Adapters	HP Wireless display adapter	J1V25AA#xxx
	USB dual output graphics adapter	C5U89AA
	HP Conferencing Keyboard	K8P74AA#xxx
	HP Speaker Phone	K7V16AA
	HP Wired Headset	K7V17AA
	HP USB-C™ to VGA Adapter	N9K76AA
	HP USB-C™ to DisplayPort Adapter	N9K78AA
	HDMI to VGA Adapter	H4F02AA
	HDMI to DVI adapter	F5A28AA
	USB-C to DisplayPort Adapter	N9K78AA
Wireless	HP lt4120 LTE/EVDO/HSPA+ Gobi™ 4G Mobile Broadband Module	TBD
	HP hs3110 HSPA+ Mobile Module	E5M76AA
Storage - External Storage	HP External USB Optical Drive	F2B56AA
	HP 500GB 7200rpm HDD	F3B97AA
	HP 180GB Solid State Drive	H4T75AA
	HP 512GB Solid State Drive	J2V75AA
	HP 256GB SED Solid State Drive (Opal 2)	K1Z11AA
	HP 256GB M2 NVME PCIe SSD (2280)	V3K66AA#ABB
	HP 512GB M2 NVME PCIe SSD (2280)	V3K67AA#ABB
	HP 128GB Solid State Drive	F4P50AA
	HP 180GB M2 SATA-3 SSD (2280)	J2V73AA
	HP 256GB M2 SATA-3 SSD (2280)	J2V74AA
Security	HP UltraSlim Keyed Cable Lock	H4D73AA
	HP Dual Head Cable Lock (Non-Master key)	T1A64AA
	HP Dual Head Cable Lock (Master Key)	T1A65AA
	HP 15.6" Notebook PC Privacy Filter	J7H71AA
	HP Docking Station Cable Lock	AU656AA#XXX
	HP Essential Combination Lock	TOY16AA
	HP Combination Lock	TOY15AA
	HP Keyed Cable Lock	TOY14AA
	HP 15'6 Privacy Filter	V8Z58AA#xxx
Other	HP Stereo 3.5mm Headset	T1A66AA
	HP Stereo USB Headset	T1A67AA

NOTE: External power supplies, power cords, cables and peripherals are not low halogen. Service parts obtained after purchase may not be low halogen.

Summary of Changes

Date of change:	Version History:		Description of change:
February 10, 2016	From v1 to v2	Added	RAID support and notes in Features; Environmental data and Battery life in Technical Specs section,
March 31, 2016	From v2 to v3	Added	AMO in Options and Accessories.
		Changed	Memory voltage, Battery testing and link
		Removed	Ubuntu Linux
May 1, 2016	From v3 to v4	Added	Options and Accesories
June 7, 2016	From v4 to v5	Changed	UHD Panel Brightness from 300 to 270 nits
		Removed	1TB 7200 HDD
July 13, 2016	From v5 to v6	Added	HP Drivelock note in Software and Security section.
August 1, 2016	From v6 to v7	Added	Red Hat 6 & 7 (Web Support) and link to support matrix, USB-Type C Elite Dock part number in Options
September 1, 2016	From v7 to v8	Added	HP 256GB and 512GB 2280 M2 part numbers in Options and accessories.
		Removed	MWS HDD/SSD Bracket only, 750GB 7200 HDD
March 1, 2018	From v8 to v9	Added	Battery note on power supply section

Copyright © 2018 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core, and Celeron and Thunderbolt are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of its proprietor used by HP Inc. under license. AMD, FirePro, and Enduro are trademarks of Advanced Micro Devices, Inc. Adobe is a trademark of Adobe Systems Incorporated. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation in the United States and/or other countries. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS Studio Sound is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved. Qualcomm and Snapdragon are trademarks of Qualcomm, Inc. NVIDIA, the NVIDIA logo, Optimus and Quadro are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. SD, SDHC, and SDXC are trademarks or registered trademarks of SD-3C in the United States, other countries or both. USB Type-C and USB-C are trademarks of USB Implementers Forum. ENERGY STAR® is a registered trademark mark of the U.S. Environmental Protection Agency.