



Technical Specifications

HP EliteDisplay E273 27-inch Monitor

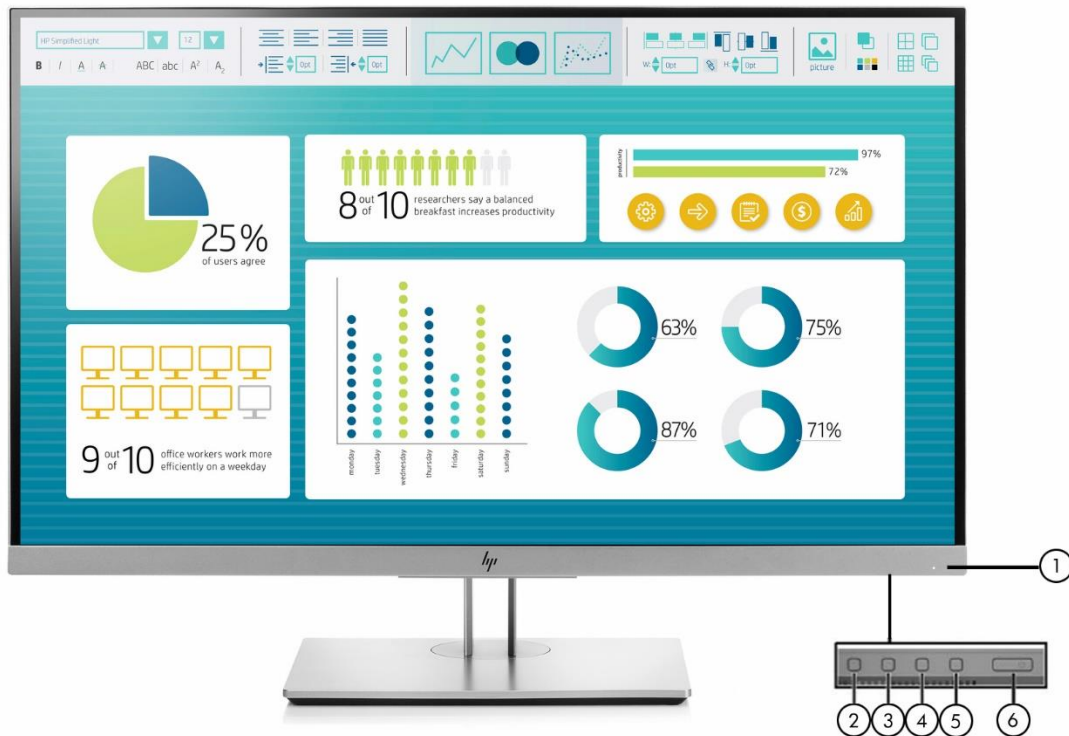

- 1. Power light** LED:
fully powered = white
sleep mode = amber
sleep timer mode = flashing amber
- 2. Menu** Press to open the OSD menu, select a menu item from the OSD, or close the OSD menu.
- 3-5. Function buttons** Use these buttons to navigate through the OSD menu based on the indicators next to the buttons that are activated while the OSD menu is open.
- 6. Power button** Turns the monitor on or off.

Technical Specifications

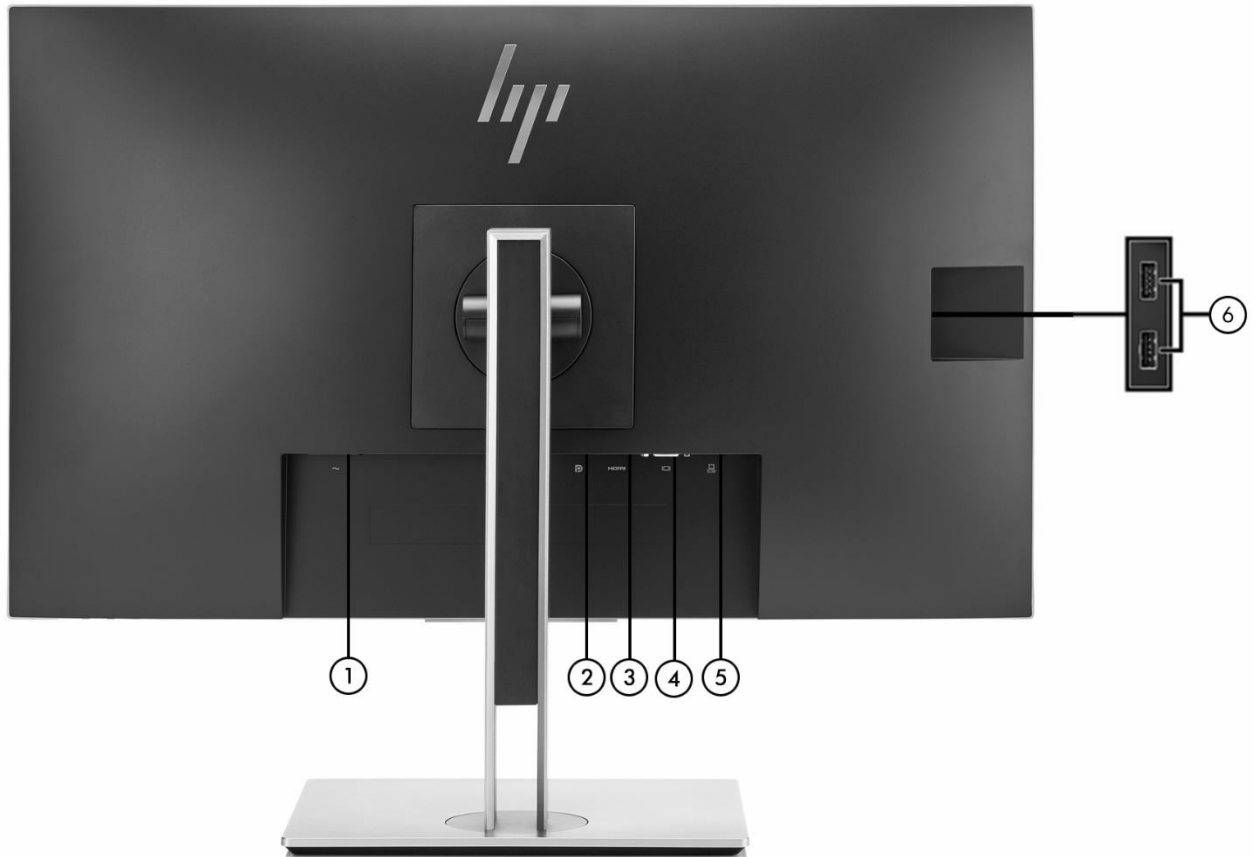

1. **Power connector**
2. **DisplayPort™ 1.2 (input) port**
3. **HDMI 1.4**
4. **VGA**
5. **USB 3.0 upstream**
6. **USB 3.0 downstream ports**

Technical Specifications

Models	1F50AA, 1FH50AC, 1FH50AS, 1FH50AT, 1FH50A8, 1FH50U9	
Panel*	Type	27-inch IPS, Micro Edge LED Backlit
	Viewable Image Area (diagonal)	68,5 cm (27 in) widescreen; diagonally measured
	Panel Active Area (W x H)	59,79 x 33,63 cm (23.54 x 13.24 in.)
	Panel Type	IPS
	Resolution	1920 x 1080 @ 60 Hz
	Aspect Ratio	16:9
	Viewing Angle (typical)	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
	Brightness (typical)	250 cd/m ²
	Contrast Ratio (typical)	1,000:1
	Dynamic Contrast Ratio (typical)	5,000,000:1
	Response Time (typical)***	5 ms
	Pixel Pitch*	0.3114 mm
	Pixel Per Inch (PPI)	81.59
	Backlight Lamp Life (to half brightness)	30,000 hours minimum
	Color Support**	Up to 16.7 million colors with the use of FRC technology (8 bit)
	Color Gamut	NTSC 72%, 94% sRGB
	Surface Hardness	3H
	Flicker Free	Yes
	Low Blue Light Capable	Yes, user selectable in OSD menu
	Anti-Glare	Yes
	*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.	
	** With the use of FRC technology.	
	***Product default is 14ms response time and can be adjusted to as low as 5ms in the display menu. See user guide for more information.	
User Controls	On Screen Display (OSD) User Controls	Brightness, Contrast, Color Control, Input Control, Image Control, Power Control, OSD Menu Control, Management, Language, Information
	Monitor Control Buttons or Switches	Menu, Information/Auto-Adjust (assignable), Viewing Mode (assignable), Next Active Input (assignable)
	User-Assignable Function Buttons	Yes, 12
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
Signal Interface/ Performance	Horizontal Frequency	30 - 80 kHz
	Vertical Frequency	50 - 60 Hz
	Native Resolution	1920 x 1080 @ 60 Hz
	Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz 1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz

Technical Specifications

	Maximum Pixel Clock Speed	170 MHz (VGA, DisplayPort, HDMI)	
	Default Color Temperature	Neutral (6500)	
VIDEO/OTHER INPUTS			
Connector Types	DisplayPort™	(1) DisplayPort™ 1.2	
	HDMI	(1) HDMI 1.4	
	VGA	(1) VGA	
	HDCP support	Yes, HDMI and DisplayPort™	
USB Port Specifications	Audio	N/A	
	USB Version	3.0	
Cables Included	USB Ports	(3) USB 3.0 ports (2 downstream and 1 upstream)	
	Video Cables Included	(1) VGA 1,8 m (5.9 ft), (1) DisplayPort™ 1,8 m (5.9 ft)	
	USB Cables Included	(1) USB B to A cable 1,8 m (5.9 ft)	
Power	Power Supply	Internal	
	Input Power	100 – 240 VAC at 50/60 Hz	
	Typical Power¹	25 W	
	Maximum Power²	42 W	
	Energy Saving/Standby Mode	0.3 W	
	Power Cable Length	1,9 m (6.2 ft)	
	EU Energy Efficiency Class (EC1062) Report and Fiche	Class A+	
DIMENSIONS AND WEIGHT			
Mechanical	Dimensions (W x D x H)	Unpacked w/stand	61,09 x 21,39 x 52,26 cm
		(highest setting)	(24.1 x 8.4 x 20.6 in)
		Unpacked w/o stand	61,09 x 5,02 x 36,4 cm
	(head only)	(24.1 x 2.0 x 14.3 in)	
	Packaged	70,7 x 28,2x 44,6 cm	
	(27.8 x 11.1 x 17.6 in)		
Weight	Head Only	4,48 kg (9.9 lb)	
	Unpacked	7,1 kg (15.7 lb)	
	Packaged	9,8 kg (21.6 lb)	
MONITOR FEATURES			
	Plug and Play	Yes	
	Color	Silver on facing bezel, side frame, column stand and foot; black on rear cover and stand center trim	
	Cable Management	Yes, integrated into column stand. Effortlessly route cables through the column stand for easy management of power, video, and USB cables.	
	Detachable Stand	Yes, ships detached	
	Tilt Range	–5° to + 22° vertical	
	Swivel Range	45°L to 45°R	
	Display height adjustment:	Adjustment Range: 150 mm	
	Pivot Rotation	Yes, 90° clockwise and counter-clockwise	
	VESA Mounting	Yes, 100 mm with integrated mount (included)	
	Security Lock-Ready	Yes	

Technical Specifications

ENVIRONMENTAL

Specifications	Temperature - Operating	5° to 35° C (41° to 95° F)
	Temperature - Non-operating	-20° to 60° C (-4° to 140° F)
	Humidity - Operating	20% to 80% Relative Humidity non-condensing
	Humidity - Non-operating	5% to 95%, 38.7° C max wet-bulb
	Altitude - Operating	0 to 5,000 m (0 to 16,404 ft)
	Altitude - Non-operating	0 to 12,192 m (0 to 40,000 ft)
	White LED Backlights	Yes
	CCFL Panel	No
	Arsenic-Free Display Glass	Yes
	Low Halogen³	Yes (except cables)
	Mercury-Free Display Backlights	Yes

OPTIONS (Each sold separately)

HP Single Monitor Arm — BT861AA	The flexible design of the HP Single Monitor Arm provides a seemingly endless range of display adjustments with an amazing 13 inches of lift, 50 degrees of tilt, and 360 degrees of pan and rotation – all at your fingertips -- helping you stay comfortable and productive throughout the day.
HP B300 PC Mounting Bracket — 2DW53AA	Attach your HP Workstation, HP Desktop Mini, HP Chromebox or select HP Thin Client directly behind select 2017 and 2018 HP EliteDisplays and HP Z Displays with the HP B300 PC Mounting Bracket. ⁷
HP S100 Speaker Bar — 2LC49AA	Add rich stereo sound to select 2017 and 2018 HP ProDisplays, HP EliteDisplays, and HP Z Displays ⁷ without crowding your desk with the HP S100 Speaker Bar, which fits neatly underneath the display head and connects through USB.
HP HDMI Standard Cable Kit — T6F94AA	Use the cable to connect your desktop to your standard HDMI devices and displays.
HP Quick Release Bracket — EM870AA⁶	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or mounts. For more information, refer to this product's QuickSpecs document.
HP Integrated Work Center for Desktop Mini and Thin Client — G1V61AA	Designed to provide convenient access to the Desktop Mini and select Thin Clients to help maximize the use of limited desk space without compromising performance or productivity. It will support many HP 17 to 24-inch diagonal LCD monitors, with VESA standard mounting brackets. For more information, refer to this product's QuickSpecs document.

Technical Specifications

WHAT'S IN THE BOX?

What's in the box?	Monitor and Accessories	HP EliteDisplay E273 27-inch Monitor, AC power cord, VGA cable, DisplayPort™ 1.2 cable, USB B to A cable
	Documentation	CD, documentation
Other	Software included	HP Display Assistant
	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Country of Origin	China

CERTIFICATION AND COMPLIANCE

Certification and Compliance	ENERGY STAR®, EPEAT® Gold ⁴ , CEL, Microsoft WHQL Certification (Windows 7, 10), TCO Certified Edge, SmartWay Transport Partnership (NA SKU), CE, CB, KC, KCC, NOM, PSB, ICE, TUV-S, ISO 9241-307, EAC, UL, CSA, PSB, ISC, CCC, CECP, ISC, VCCI, FCC, BSMI, Vietnam MEPS, ANZ MEPS, WEEE
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Protected by HP, including a 3-year standard limited warranty. Optional HP Care Pack Services are extended service contracts that extend your protection beyond the standard warranties. ⁵

Technical Specifications

Copyright © 2017 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

1. Default Power is measured with factory defaults, including factory default brightness and USB ports loaded at 25% of maximum.
2. Maximum Power is measured with monitor at maximum brightness and with USB ports loaded at 100% of maximum.
3. External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
4. EPEAT® registered where applicable. EPEAT registration varies by country. See www.epeat.net for registration status by country. Search keyword generator on HP's 3rd party option store for solar energy accessory at www.hp.com/go/options.
5. Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. See <http://www.hp.com/go/cpc> for details.
6. The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.
7. Sold separately. See product QuickSpecs for exact device and display compatibility.

