


Overview

HP EliteBook 850 G5 Notebook PC

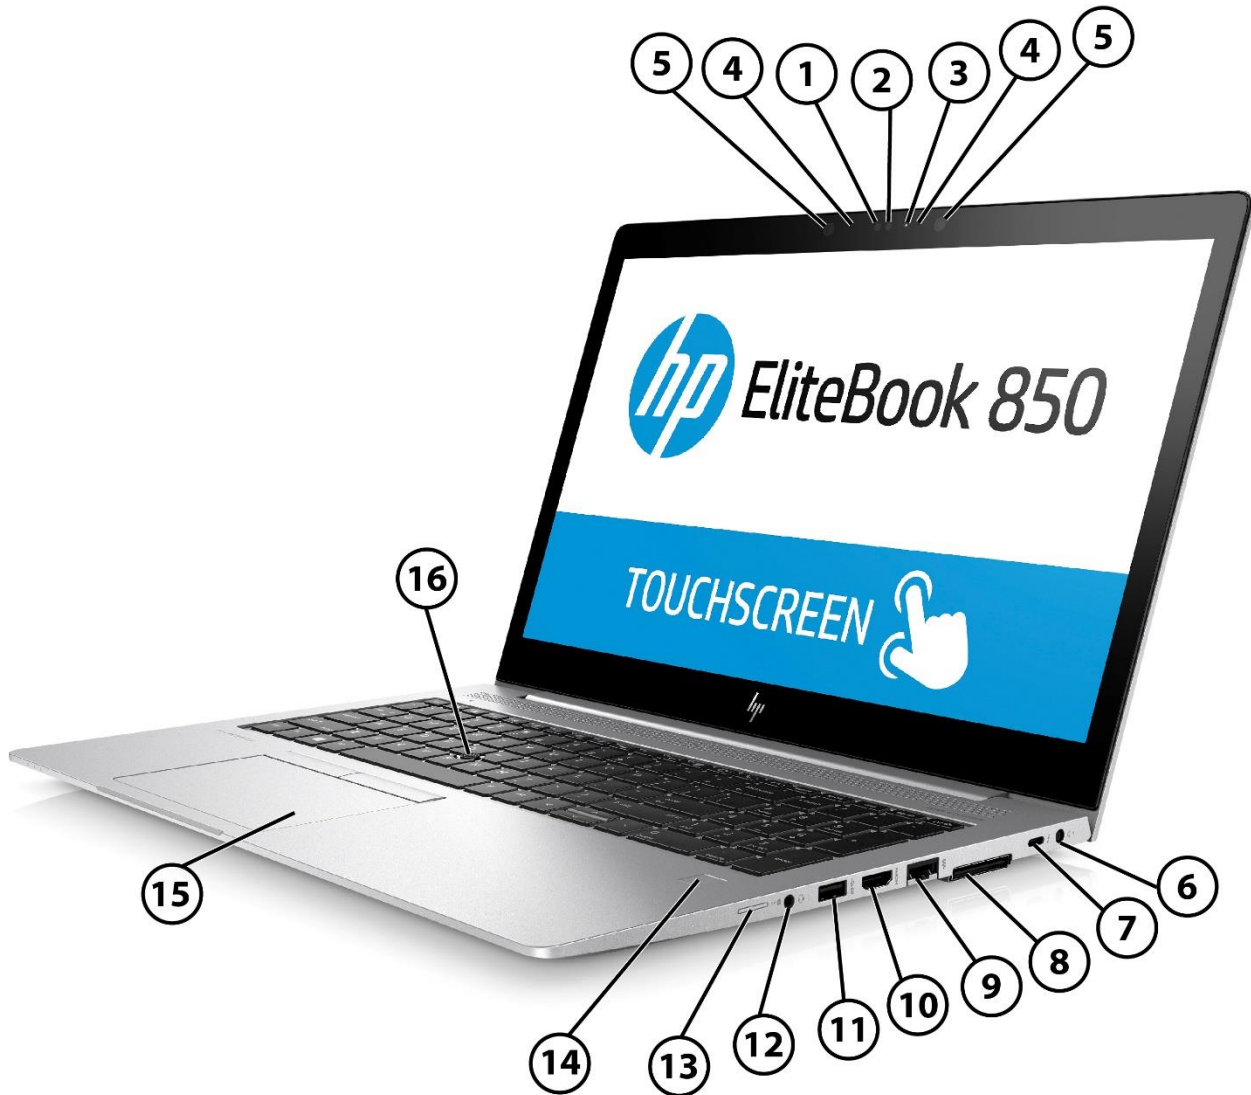

Left

- | | |
|--|------------------------------------|
| 1. HD Camera (Select models only) | 9. Ethernet port |
| 2. IR Camera (Select models only) | 10. HDMI port (Cable not included) |
| 3. Webcam LED (Select models only) | 11. USB 3.1 Gen 1 port |
| 4. Internal microphones | 12. Audio combo jack |
| 5. IR Camera LEDs (Select models only) | 13. SIM card slot ¹ |
| 6. Power connector | 14. Fingerprint reader |
| 7. USB Type-C™ with Thunderbolt™ | 15. Clickpad |
| 8. Docking connector | 16. Pointstick |

1. All units have a SIM card slot and icon but units that do not support WWAN are shipped with a non-removable SIM slot plug

Overview



1. Indicator LEDs:
Power light
Wireless light
Storage usage light
2. Smartcard Reader (Select models)
3. USB 3.1 Gen 1 charging port

Right

4. Security Lock slot (Lock sold separately)
5. Power button

Overview

AT A GLANCE

- Eye-catching ultraslim design, premium precision-crafted machined aluminum (CNC), seamless formed aluminum chassis for clean, crisp, premium look and feel
- Choice of 8th Generation Intel® Core™ i5, i7 Processors and 7th generation Intel® Core™ i5 Processors
- Designed to support all HP docking options including HP's traditional Ultraslim mechanical dock and all-new Thunderbolt™ dock² (Available in May 2018)
- Featuring HP Collaboration Keyboard with Clickpad to manage most commonly used conferencing functions with a single keystroke
- Innovative world-facing third mic improves inbound ambient noise cancellation
- Optional ultrabright displays with ambient light sensor
- Enterprise grade security with HP SureStart Gen4, HP Privacy Camera³, HP Sure View², HP Sure Run, HP Sure Recover, SmartCard Reader² and Fingerprint reader²
- Choice of displays:
 - 39.6cm (15.6") diagonal FHD IPS anti-glare LED-backlit non-touch, 220 cd/m², 67% sRGB
 - 39.6cm (15.6") diagonal FHD IPS anti-glare LED-backlit non-touch, 400 cd/m², 100% sRGB
 - 39.6cm (15.6") diagonal UHD IPS anti-glare LED-backlit non-touch, 400 cd/m² 100% sRGB
 - 39.6cm (15.6") diagonal FHD IPS LED-backlit Corning® Gorilla® Glass 3 touch, 220 cd/m², 67% sRGB
 - 39.6cm (15.6") diagonal FHD IPS anti-glare LED-backlit non-touch, 650 cd/m², 100% sRGB with HP Sure View (available in June 2018)
- Optional AMD Radeon™ RX540 discrete graphics with 2 GB GDDR5 video memory
- Flexible wireless connectivity options
- Preinstalled with Windows 10 versions or FreeDOS 2.0
- Choice of solid state drives up to 1 TB and DDR4 memory up to 32 GB
- Supports fast charging (50% in 30 minutes) with no impact on battery recharge cycles⁴
- Optional HD camera or Infra Red camera with multi-array microphone
- Battery life:
 - UMA graphics: Up to 14 hours and 15 minutes (Intel® 7th generation CPU and 3-cell 56 WHr battery)
 - Discrete graphics: Up to 14 hours (Intel® 7th generation CPU and 3-cell 56 WHr battery)
- Passed MIL-SPEC 810G testing⁵

2. Sold separately or as an optional feature.

3. Only available with non-touch configurations.

4. Recharges your battery up to 50% within 30 minutes when the system is off or in standby mode. Power adapter with a minimum capacity of 65 watts is required. After charging has reached 50% capacity, charging will return to normal. Charging time may vary +/-10% due to System tolerance.

5. MIL STD 810G testing is not intended to demonstrate fitness for Department of Defense contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Damage under the MIL STD test conditions or any accidental damage requires an optional HP Accidental Damage Protection Care Pack.

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Features

PRODUCT NAME

HP EliteBook 850 G5 Notebook PC

OPERATING SYSTEM

Preinstalled	Windows 10 Pro 64 ¹ Windows 10 Home 64 ¹ FreeDOS 2.0
---------------------	--

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com/>

PROCESSORS

Intel® Core™ i5-7200U with Intel® HD Graphics 620 (2.5 GHz base frequency, up to 3.1 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{2,3,4}

Intel® Core™ i5-7300U vPro™ processor with Intel® HD Graphics 620 (2.6 GHz base frequency, up to 3.5 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)^{2,3,4}

Intel® Core™ i5-8250U with Intel® UHD Graphics 620 (1.6 GHz base frequency, up to 3.4 GHz with Intel® Turbo Boost Technology, 6 MB cache, 4 cores)^{2,3,4}

Intel® Core™ i5-8350U vPro™ processor with Intel® UHD Graphics 620 (1.7 GHz base frequency, up to 3.6 GHz with Intel® Turbo Boost Technology, 6 MB cache, 4 cores)^{2,3,4}

Intel® Core™ i7-8550U with Intel® UHD graphics 620 (1.8 GHz base frequency, up to 4 GHz with Intel® Turbo Boost Technology, 8 MB cache, 4 cores)^{2,3,4}

Intel® Core™ i7-8650U vPro™ processor with Intel® UHD graphics 620 (1.9 GHz base frequency, up to 4.2 GHz with Intel® Turbo Boost Technology, 8 MB cache, 4 cores)^{2,3,4}

Processor Family

7th Generation Intel® Core™ i5 processor (i5-7300U, i5-7200U models)

8th Generation Intel® Core™ i5 processor (i5-8350U, i5-8250U models)

8th Generation Intel® Core™ i7 processor (i7-8650U, i7-8550U models)

2. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

3. Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

4. **NOTE:** In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel® and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

Features

CHIPSET

Chipset is integrated with processor

GRAPHICS

Integrated

Intel® HD Graphics 620⁵

Intel® UHD Graphics 620⁵

Discrete

AMD Radeon™ RX 540 (2 GB GDDR5 video memory)^{6,7}

Support HD decode, DX12, HDMI 1.4b⁸

5. HD content required to view HD images.

6. Sold separately or as an optional feature.

7. AMD Dynamic Switchable Graphics technology requires an Intel® processor, plus an AMD Radeon™ discrete graphics configuration and is not available on FreeDOS and Linux OS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be).

8. HDMI cable sold separately.

DISPLAY

Non-Touch

39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 220 cd/m², 67% sRGB (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 220 cd/m², 67% sRGB with HD camera (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 220 cd/m², 67% sRGB with HD IR webcam (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 220 cd/m², 67% sRGB for WWAN (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 220 cd/m², 67% sRGB with HD camera for WWAN (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 220 cd/m², 67% sRGB with HD IR webcam for WWAN (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 400 cd/m², 100% sRGB with Ambient Light Sensor and HD IR webcam (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 400 cd/m², 100% sRGB with Ambient Light Sensor and HD IR webcam for WWAN (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal UHD IPS anti-glare LED-backlit, 400 cd/m², 100% sRGB with Ambient Light Sensor and HD IR webcam for WWAN (3840 x 2160)^{9,10,11}

HP Sure View Integrated Privacy Screen 39.6 cm (15.6") diagonal FHD IPS anti-glare LED-backlit, 650 cd/m², 100% sRGB with HD IR webcam for WWAN (1920 x 1080) [5,6,9] (available in June 2018)

Touch

39.6 cm (15.6") diagonal FHD IPS LED-backlit touch screen with Corning® Gorilla® Glass 3, 220 cd/m², 67% sRGB with HD IR webcam (1920 x 1080)^{9,10,11}

39.6 cm (15.6") diagonal FHD IPS LED-backlit touch screen with Corning® Gorilla® Glass 3, 220 cd/m², 67% sRGB with HD IR webcam for WWAN (1920 x 1080)^{9,10,11}

HDMI 1.4b

Supports resolution up to 4k @ 24Hz

Features

Displays support

Docking station model	Total number of supported displays (incl. the notebook display)	Max.resolutions supported	Dock Connectors	Technical limitations
HP UltraSlim Docking Station	3	Dual 2.5K @ 60Hz	2xDP, 1xVGA	Dual 2.5k only with both displays into DP
HP Thunderbolt Dock G2 (Available 2Q 2018)	3	Dual 4K @ 60Hz	2xDP, 1xVGA, 1xTB, 1xUSB-C alt-mode	Dual 4k only with one display in to DP and + TB port or USB-C alt mode + TB port
HP Elite USB-C Dock G4 (Available 2Q 2018)	3	Dual 2K @ 60Hz Single 4K @ 60Hz (3840 x 1440)	1xHDMI, 2xDP	
HP USB-C Universal Dock	3	Dual 4K @ 60Hz Single 5K @ 60Hz	2xDP	
HP USB-C Travel Dock	2	Single 2K @ 60Hz	1xHDMI, 1xVGA	Single external display Only HDMI or VGA at the time
HP USB-C Mini Dock	2	Single 4K @ 30Hz	1xHDMI, 1xVGA	Single external display Only HDMI or VGA at the time

9. HD content required to view HD images.

10. Sold separately or as an optional feature.

11. Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary M.2 Storage

128 GB SATA-3 SS TLC¹²

256 GB PCIe NVMe Value SS TLC¹²

256 GB PCIe Gen3x4 NVMe SS TLC¹²

256 GB SATA-3 SS TLC Opal 2¹²

360 GB PCIe Gen3x4 NVMe SS TLC (Intel®)¹²

512 GB PCIe Gen3x4 NVMe SS TLC¹²

512 GB PCIe Gen3x4 NVMe SS TLC Opal 2¹²

512 GB SATA-3 SS TLC FIPS-140-2¹²

1 TB PCIe Gen3x4 NVMe SS TLC¹²

12. For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10) is reserved for system recovery software.

Features

MEMORY

Maximum Memory

32 GB DDR4-2400 SDRAM¹³

Memory

32 GB DDR4-2400 SDRAM (2 X 16 GB)¹³

16 GB DDR4-2400 SDRAM (1 X 16 GB)¹³

16 GB DDR4-2400 SDRAM (2 X 8 GB)¹³

8 GB DDR4-2400 SDRAM (1 x 8 GB)¹³

8 GB DDR4-2400 SDRAM (2 x 4 GB)¹³

4 GB DDR4-2400 SDRAM (1 x 4 GB)¹³

Memory Slots

2 SODIMM

Both slots are upgradeable

System runs at 2133 for Intel® 7th generation processors

System runs at 2400 for Intel® 8th generation processors

Supports Dual Channel Memory.

13. Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

NETWORKING/COMMUNICATIONS

WLAN¹⁴

Intel® Dual Band Wireless-AC 8265 802.11a/b/g/n/ac (2x2) Wi-Fi® and Bluetooth® 4.2 Combo, vPro™¹⁵

Intel® Dual Band Wireless-AC 8265 802.11a/b/g/n/ac (2x2) Wi-Fi® and Bluetooth® 4.2 Combo, non-vPro™¹⁵

Realtek RTL8822BE 802.11ac (2x2) Wi-Fi® and Bluetooth® 4.2 Combo, non-vPro™¹⁵

WWAN¹⁴

HP lt4132 LTE/HSPA+ 4G Mobile Broadband¹⁶

Intel® XMM™ 7360 LTE-Advanced¹⁶

NFC¹⁴

NXP NPC300 Near Field Communication Module

Miracast

Native Miracast Support¹⁷

Ethernet

Intel® I219-LM 10/100/1000 GbE, vPro™¹⁸

Intel® I219-V 10/100/1000 GbE, non-vPro™¹⁸

14. Sold separately or as an optional feature.

15. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

16. WWAN module requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products, in all regions.

17. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming

Features

18. The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

AUDIO/MULTIMEDIA

Audio

Audio by Bang & Olufsen
Integrated 3 Multi Array Microphone
2 Integrated Stereo Speakers (74Db)

Webcam

HD camera^{19,20}
HD IR camera^{19,20}

19. HD content required to view HD images.
20. Sold separately or as an optional feature.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

HP Premium Collaboration Keyboard, spill resistant with drain
Backlit keyboard available as an option

Pointing Device

Clickpad with multi-touch gestures enabled, taps enabled as default
Microsoft Precision Touchpad Default Gestures Support

Function Keys

F1 - Display Switching
F2 - Blank or Privacy
F3 - Brightness Down
F4 - Brightness Up
F5 - Audio Mute
F6 - Volume Down
F7 - Volume Up
F8 - Mic Mute
F9 - Blank or Backlit Toggle
F10 - numlk
F11 - Wireless
F12 - Calendar
Share/Present
Call Answer
Call End

Hidden Functions

Fn+R = Break
Fn+S = Sys Rq
Fn+C = Scroll Lock
Fn+E = Insert
Fn+W = Pause

Features

SOFTWARE AND SECURITY

Preinstalled Software

BIOS

HP BIOSphere Gen4²²
HP Drive Lock & Automatic Drive Lock⁴⁰
BIOS Update via Network
Master Boot Record Security
Power On Authentication
Secure Erase²³
Absolute Persistence Module²⁴
Pre-boot Authentication
HP Wireless Wakeup

Software

HP Native Miracast Support²¹
HP LAN-Wireless Protection
HP Connection Optimizer
HP ePrint + JetAdvantage²⁵
HP Hotkey Support - CMIT
HP Recovery Manager
HP Jumpstart
HP Support Assistant²⁶
HP Noise Cancellation Software
HP PhoneWise³³
Buy Office

Manageability Features

HP Driver Packs³¹
HP System Software Manager (SSM)
HP BIOS Config Utility (BCU)
HP Client Catalog
HP Manageability Integration Kit Gen2²⁸
Ivanti Management Suite²⁹
HP Collaboration Keyboard

Client Security Software

HP Client Security Suite Gen4³⁰ including:
HP Security Manager²⁷ (including Credential Manager, HP Password Manager, HP Spare Key)
Power On Authentication
HP Fingerprint Sensor³⁵
HP Device Access Manager

Features

HP Power On Authentication
Microsoft Defender³²

Security Management

HP BIOSphere Gen4²²
HP Drive Lock & Automatic Drive Lock
BIOS Update via Network
Secure Erase²³
Pre-boot Authentication
SATA 0,1 port disablement (viaBIOS)
RAID configurations³⁶
Serial, USB enable/disable (viaBIOS)
Power-on password (viaBIOS)
Setup password (viaBIOS)
Support for chassis padlocks and cable lock devices
HP Sure Click³⁷
HP Sure Start Gen4³⁴
HP Sure Run³⁸
HP Sure Recover³⁹

Security

TPM

Model: Infineon SLB9670
Version: 7.62.3126.0
Revision: TPM 2.0
FIPS 140-2 Compliant: Yes (select models only)

Smartcard Reader

Model number: Alcor AU9560
FIPS 201 Compliant: Yes

IPv6 Certification:

Yes

MD5 Hash: Please follow the instructions below to access MD5 Hash.

Log-on to <http://hp.com/support>, enter your product name, select software and drivers, select OS, select driver. After selecting the driver, click on “Associated files” and then click on “Download”. When opening the file, under “Purpose” you should see the appropriate “SOFTPAQ MD5:” Field

Is the BIOS on this notebook ISO/IEC 19678:2015 (formerly NIST 800-147) compliant?:

Yes

UEFI version: 2.5

21. [Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming](#)

Features

22. HP BIOSphere Gen4 features may vary depending on the PC platform and configurations requires 8th Gen Intel® processors.
 23. Secure Erase for the methods outlined in the National Institute of Standards and Technology Special Publication 800-88. Supported on Elite platforms with BIOS version F.03 or higher.
 24. Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.
 25. HP ePrint Driver requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/eprintcenter>). Print times and connection speeds may vary.
 26. HP Support Assistant requires Windows and Internet access.
 27. HP Driver Packs not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.
 28. HP Manageability Integration Kit can be downloaded from <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>
 29. Ivanti Management Suite subscription required.
 30. HP Client Security Suite Gen4 requires Windows and Intel® or AMD 8th generation processors.
 31. HP Password Manager requires Internet Explorer or Chrome or FireFox. Some websites and applications may not be supported. User may need to enable or allow the add-on / extension in the internet browser.
 32. Microsoft Defender Opt in and internet connection required for updates.
 33. HP PhoneWise Client is only available on select platforms. For supported platforms and HP PhoneWise system requirements see <http://www.hp.com/go/HPPhoneWise>.
 34. HP Sure Start Gen4 is available on HP EliteBook products equipped with Intel® 8th generation processors
 35. HP Fingerprint Sensor sold separately or as an optional feature.
 36. RAID configuration is optional and does require a second hard drive.
 37. HP Sure Click is available on most HP PCs and supports Microsoft® Internet Explorer and Chromium™. Supported attachments include Microsoft Office (Word, Excel, PowerPoint) and PDF files in read only mode, when Microsoft Office or Adobe Acrobat are installed.
 38. HP Sure Run is available on HP Elite products equipped with Intel® or AMD® 8th generation processors.
 39. HP Sure Recover is available on HP Elite PCs with 8th generation Intel® or AMD processors and requires an open, wired network connection. You must back up important files, data, photos, videos, etc. before using HP Sure Recover to avoid loss of data.
 40. HP Drive Lock is not supported on NVMe drives.
-

Features

POWER

Power Supply

HP Smart 45 W External AC power adapter³⁹
HP Smart 45 W External AC power adapter, 2-prong (Japan only)³⁹
HP Smart 65 W External AC power adapter³⁹
HP Smart 65 W EM External AC power adapter³⁹
45 W USB Type-C™ adapter³⁹
65 W USB Type-C™ adapter³⁹

Primary Battery

HP Long Life 3-cell, 56 Wh Li-ion⁴⁰

Power Cord

2-wire plug - 1.0m (Japan only)³⁹
3-wire plug - 1.0m³⁹
3-wire plug - 1.8m³⁹
Duckhead power cord - 1.0m³⁹
Duckhead power cord - 1.8m³⁹

Battery Life⁴¹

UMA graphics: Up to 14 hours and 15 minutes (Intel® 7th generation CPU and 3-cell 56 WHr battery)
Discrete graphics: Up to 14 hours (Intel® 7th generation CPU and 3-cell 56 WHr battery)

39. Availability may vary by country.

40. Battery is internal and not replaceable by customer. Serviceable by warranty.

41. Windows 10 MM14 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.

WEIGHTS & DIMENSIONS

Weight

Starting at 3.94 lb (non-touch); Starting at 4.37 lb (touch)⁴²
Starting at 1.78 kg (non-touch); Starting at 1.93 kg (touch)⁴²

Dimensions (w x d x h)

Non-touch

14.60 x 9.91 x 0.72 in
37 x 25.2 x 1.83 cm

Touch

14.60 x 9.91 x 0.73 in
37 x 25.2 x 1.86 cm

42. Weight will vary by configuration.

Features

PORTS/SLOTS

Ports

- 1 Thunderbolt™ (USB Type-C™ connector)
- 2 USB 3.1 Gen 1 (1 charging)
- 1 HDMI 1.4b⁴³
- 1 RJ-45
- 1 docking connector
- 1 headphone/microphone combo
- 1 AC power
- 1 SIM card slot⁴⁴
- 1 Smartcard reader⁴⁴

43. HDMI cable sold separately.

44 Sold separately or as an optional feature.

SERVICE AND SUPPORT

3 years and 1 year limited warranties and 90-day software limited warranty options depending on country. Batteries have a default one year limited warranty except for Long Life batteries which will have same 1 year or 3 year limited warranty as the platform. On-site service and extended coverage is also available. HP Care Pack Services are optional extended service contracts that go beyond the standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at <http://www.hp.com/go/cpc>.⁴⁵

45. HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit <http://www.hp.com/go/cpc>. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

Technical Specifications

SYSTEM UNIT

Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	19V
	Average Operating Power	Win 10
	Integrated Graphics	6.78W
	Discrete Graphics	18W
	Max Operating Power	Discrete < 65W UMA < 45W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	40 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Planned Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models ¹
	EPEAT®	Registered Gold in United States ²
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
SABS	Yes	
UKRSERTCOMPUTER		

1. Configurations of the HP Elitebook 850 G5 that are ENERGY STAR® qualified are identified as HP Elitebook 850 G5 ENERGY STAR on HP websites and on <http://www.energystar.gov>.

2. EPEAT® registered where applicable. EPEAT registration varies by country. See <http://www.epeat.net> for registration status by country. Search keyword generator on HP's 3rd party option store for solar generator accessories at <http://www.hp.com/go/options>.

Technical Specifications

DISPLAYS

Panel LCD 15.6 inch FHD (1920x1080) Anti-Glare WLED UWVA 67% cg 220nits eDP slim NB Non-Touch

Outline Dimensions (W x H)	350.96 x 216.75 (max.)
Active Area	344.16 x 193.59 (typ.)
Weight	370g max.
Diagonal Size	15.6"
Thickness	3.2mm max.
Interface	eDP 1.2
Surface Treatment	Anti-glare
Touch Enabled	No
Contrast Ratio	600:1 (typ) - AG
Refresh Rate	60Hz
Brightness	220 nits typical (Panel Only)
Pixel Resolution	1920 x 1080 (FHD)
Format	RGB
Backlight	LED
Color Gamut Coverage	67% sRGB
Color Depth	6 bits + Hi FRC
Viewing Angle	UWVA 85/85/85/85

Panel LCD 15.6 inch FHD (1920x1080) WLED UWVA 67% cg 220nits eDP slim NB Touch

Outline Dimensions (W x H)	350.96 x 216.75 (max.)
Active Area	344.16 x 193.59 (typ.)
Weight	568g max.
Diagonal Size	15.6"
Thickness	3.4mm max.
Interface	eDP 1.2
Surface Treatment	BrightView Glass
Touch Enabled	Yes
Contrast Ratio	600:1 (typ)
Refresh Rate	60Hz
Brightness	220 nits typical (Panel Only)
Pixel Resolution	1920 x 1080 (FHD)
Format	RGB
Backlight	LED
Color Gamut Coverage	67% sRGB
Color Depth	6 bits + Hi FRC
Viewing Angle	UWVA 85/85/85/85

Technical Specifications

Panel LCD 15.6 inch FHD (1920x1080) Anti-Glare WLED UWVA 100% cg 400nits eDP 1.3 + PSR slim NB	Outline Dimensions (W x H)	350.96 x 216.75 (max.)
	Active Area	344.16 x 193.59 (typ.)
	Weight	370g max.
	Diagonal Size	15.6"
	Thickness	3.2mm max.
	Interface	eDP 1.3 + PSR (2 lane)
	Surface Treatment	Anti-glare
	Touch Enabled	No
	Contrast Ratio	600:1 (typical)
	Refresh Rate	60Hz
	Brightness	400 nits typical (Panel Only)
	Pixel Resolution	1920 x 1080 (FHD)
	Format	RGB
	Backlight	LED
	Color Gamut Coverage	100%
Color Depth	6 bits + Hi FRC	
Viewing Angle	UWVA 85/85/85/85	

Panel LCD 15.6 inch UHD (3840x2160) Anti-Glare WLED UWVA 100% cg 400nits eDP 1.3 + PSR ultraslim NB	Outline Dimensions (W x H)	350.96 x 216.95 max.
	Active Area	344.2176 x 193.6224 typ.
	Weight	320g max.
	Diagonal Size	15.6"
	Thickness	2.6 (mm) max.
	Interface	eDP1.3+PSR
	Surface Treatment	Anti-glare
	Touch Enabled	No
	Contrast Ratio	1200:1 (typ)
	Refresh Rate	60Hz
	Brightness	400 nits typical (Panel Only)
	Pixel Resolution	3840 x 2160 (UHD)
	Format	RGB
	Backlight	LED
	Color Gamut Coverage	100%
Color Depth	8 bit	
Viewing Angle	UWVA 85/85/85/85	

Technical Specifications

**Panel LCD 15.6 inch FHD
(1920x1080) Anti-Glare WLED
UWVA 100% cg 650nits eDP
1.4+PSR ultraslim NB Privacy**

Outline Dimensions (W x H)	350.96 x 216.75 max.
Active Area	344.46 x 193.89
Weight	320g max.
Diagonal Size	15.6"
Thickness	2.80 mm max.
Interface	eDP 1.4
Surface Treatment	Anti-glare
Touch Enabled	No
Contrast Ratio	Sharing mode, 600:1 (typ.) Privacy mode, 150:1 (typ.)
Refresh Rate	120Hz
Brightness	Sharing mode, 650 nits (typ.) Privacy mode, 350 nits (typ.)
Pixel Resolution	1920 x 1080 (FHD)
Format	RGB strip
Backlight	LED
Color Gamut Coverage	100% sRGB
Color Depth	8 bits
Viewing Angle	Sharing mode, CR >10, L/R/U/D, 85/85/85/85 (typ.) Privacy mode CR>2, L/R/U/D, 50/50/85/85 (typ.)

Technical Specifications

STORAGE¹

SSD 128 GB 2280 M2 SATA-3 TLC	Drive Weight	0.02 lb (10 g)
	Capacity	128 GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	ATA-8, SATA 3.0
	Maximum Sequential Read	Up To 520 MB/s
	Maximum Sequential Write	Up To 450 MB/s
	Logical Blocks	250,069,680
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	DIPM; TRIM; DEVSLP

SSD 1 TB 2280 PCIe-3x4 NVMe TLC DS	Drive Weight	0.02 lb (10 g)
	Capacity	1024GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 2800 MB/s
	Maximum Sequential Write	Up To 1600 MB/s
	Logical Blocks	2,000,409,264
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

SSD 256 GB 2280 M2 PCIe-3x4 SS NVMe TLC	Drive Weight	0.02 lb (10 g)
	Capacity	256 GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 2600 MB/s
	Maximum Sequential Write	Up To 900 MB/s
	Logical Blocks	500,118,192
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

Technical Specifications

SSD 256 GB 2280 M2 SATA-3 Self Encrypted OPAL2 TLC	Drive Weight	0.02 lb (10 g)
	Capacity	256 GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	ATA-8, SATA 3.0
	Maximum Sequential Read	Up To 530 MB/s
	Maximum Sequential Write	Up To 515 MB/s
	Logical Blocks	500,118,192
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	DIPM; TRIM; DEVSLP

256 GB 2280 PCIe NVMe Value Solid State Drive	Drive Weight	0.02 lb (10 g)
	Capacity	256 GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 1700 MB/s
	Maximum Sequential Write	Up To 600 MB/s
	Logical Blocks	500,118,192
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

SSD 360 GB 2280 PCIe-3x4 NVMe TLC	Drive Weight	0.02 lb (10 g)
	Capacity	360 GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 1700 MB/s
	Maximum Sequential Write	Up To 600 MB/s
	Logical Blocks	703,282,608
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

Technical Specifications

SSD 512GB 2280 M2 PCIe-3x4 SS NVMe TLC	Drive Weight	0.02 lb (10 g)
	Capacity	512 GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 2600 MB/s
	Maximum Sequential Write	Up To 1400 MB/s
	Logical Blocks	1,000,215,216
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	TRIM; L1.2

SSD 512GB 2280 M2 SATA-3 TLC FIPS	Drive Weight	0.02 lb (10 g)
	Capacity	512 GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	ACS-3, SATA 3.2
	Maximum Sequential Read	Up To 530 MB/s
	Maximum Sequential Write	Up To 400 MB/s
	Logical Blocks	1,000,215,216
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	DIPM; TRIM; DEVSLP

SSD 512GB 2280 PCIe-3x4 NVMe Self Encrypted OPAL2 TLC	Drive Weight	0.02 lb (10 g)
	Capacity	512GB
	Height	0.09 in (2.3 mm)
	Width	0.87 in (22 mm)
	Interface	PCIe NVMe Gen3X4
	Maximum Sequential Read	Up To 2900 MB/s
	Maximum Sequential Write	Up To 1400 MB/s
	Logical Blocks	1,000,215,215
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
	Features	DIPM; TRIM; DEVSLP

1. For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10) is reserved for system recovery software.

Technical Specifications

NETWORKING/COMMUNICATIONS

Intel® 802.11a/b/g/n/ac (2x2) WiFi and Bluetooth® 4.2 Combo¹	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
	Interoperability	Wi-Fi certified
	Frequency Band	802.11b/g/n <ul style="list-style-type: none"> • 2.402 – 2.482 GHz 802.11a/n <ul style="list-style-type: none"> • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz
	Data Rates	<ul style="list-style-type: none"> • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
	Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
	Security³	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware •802.1x authentication •WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. •WPA2 certification •IEEE 802.11i •Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power²	<ul style="list-style-type: none"> • 802.11b : +14dBm minimum • 802.11g : +12dBm minimum • 802.11a : +12dBm minimum • 802.11n HT20(2.4GHz) : +12dBm minimum • 802.11n HT40(2.4GHz) : +12dBm minimum • 802.11n HT20(5GHz) : +10dBm minimum • 802.11n HT40(5GHz) : +10dBm minimum • 802.11ac VHT80(5GHz) : +10dBm minimum
	Power Consumption	<ul style="list-style-type: none"> • Transmit mode 2.0 W • Receive mode 1.6 W • Idle mode (PSP) 180 mW (WLAN Associated) • Idle mode 50 mW (WLAN unassociated) • Connected Standby 10mW • Radio disabled 8 mW
	Power Management	ACPI compliant power management 802.11 compliant power saving mode

Technical Specifications

Receiver Sensitivity⁴	802.11b, 1Mbps : -93.5dBm maximum 802.11b, 11Mbps : -84dBm maximum 802.11a/g, 6Mbps : -86dBm maximum 802.11a/g, 54Mbps : -72dBm maximum 802.11n, MCS07 : -67dBm maximum 802.11n, MCS15 : -64dBm maximum 802.11ac, MCS0 : -84dBm maximum 802.11ac, MCS9 : -59dBm maximum
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express Half-MiniCard
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm
Weight	Type 2230 : 2.8g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED White – Radio ON

HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

Bluetooth Specification	4.0/4.1/4.2 Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW
Electrical Interface	USB 2.0 compliant

Technical Specifications

Bluetooth Software Supported	Microsoft Windows Bluetooth Software
Power Management Certifications	Microsoft Windows ACPI, and USB Bus Support FCC (47 CFR) Part 15C, Section 15.247 & 15.249
Power Management Certifications	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth Profiles Supported	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

1. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices
2. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
3. Check latest software/driver release for updates on supported security features.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Technical Specifications

HP It4132 LTE/HSPA+ 4G Mobile Broadband⁵	Technology/Operating bands	LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3) MHz, 850 (Band 5), 2600 (Band 7), 900 (Band 8) MHz, 800 (Band 20), 700 (Band 28) MHz. HSPA+: 2100 (Band 1), 1900 (Band 2), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
	Wireless protocol standards	3GPP Release 10 LTE Specification CAT.4, 20MHz BW WCDMA R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification E-GPRS: Class B, Multi-slot class 12, coding schemes CS1 - CS4 and MSC1 - MSC9
	GPS	Standalone, A-GPS (MS-B and LTO)
	GPS bands	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
	Maximum data rates	LTE: 150 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
	Maximum output power	LTE: 23 dBm HSPA+: 23.5 dBm E-GPRS 1900/1800: 26 dBm E-GPRS 900/850: 27 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm
	Maximum power consumption	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,600 mA (peak); 500 mA (average)
	Form Factor	M.2, 3042-S3 Key B
	Weight	6 g
	Dimensions (Length x Width x Thickness)	42 30 x 2.3 mm

5. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices

Technical Specifications

Intel® XMM™ 7360 LTE-Advanced⁶	Technology/Operating bands	FDD LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3), 1700/2100 (Band 4), 850 (Band 5), 2600 (Band 7), 900 (Band 8), 1400 (Band 11), 700 (Band 12 lower), 700 (Band 13 upper), 700 (Band 17 lower), 850 (Band 18 lower), 850 (Band 19 upper), 800 (Band 20), 1400 (Band 21), 850 (Band 26), 700 (Band 28), 700 (Band 29 RX only), 2300 (Band 30), 2100 (Band 66). TDD LTE: 2600 (Band 38), 1900 (Band 39), 2400 (Band 40), 2500 (Band 41). HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz
	Wireless protocol standards	3GPP Release 11 LTE Specification CAT.9, DL 60MHz BW throughput up to 450Mbps; UL 20MHz throughput up to 50Mbps WCDMA R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification
	GPS	Standalone, A-GPS (MS-A, MS-B and XTRA)
	GPS bands	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz, Beidou 1561.098 MHz
	Maximum data rates	LTE: 450 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21Mbps (Download), 5.76 Mbps (Upload)
	Maximum output power	LTE: 23 dBm HSPA+: 23.5 dBm
	Maximum power consumption	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average)
	Form Factor	M.2, 3042-S3 Key B
	Weight	5.8 g
	Dimensions (Length x Width x Thickness)	42 x 30 x 2.3 mm

6. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices

Technical Specifications

Realtek 802.11b/g/n (2x2) WiFi and Bluetooth® 4.2 Combo⁷	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
	Interoperability	Wi-Fi certified
	Frequency Band	802.11b/g/n [2] • 2.402 – 2.482 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
	Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,
	Security⁹	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power⁸	<ul style="list-style-type: none"> • 802.11b : +14dBm minimum • 802.11g : +12dBm minimum • 802.11a : +12dBm minimum • 802.11n HT20(2.4GHz) : +12dBm minimum • 802.11n HT40(2.4GHz) : +12dBm minimum • 802.11n HT20(5GHz) : +10dBm minimum • 802.11n HT40(5GHz) : +10dBm minimum • 802.11ac VHT80(5GHz) : +10dBm minimum
	Power Consumption	<ul style="list-style-type: none"> • Transmit mode 2.0 W • Receive mode 1.6 W • Idle mode (PSP) 180 mW (WLAN Associated) • Idle mode 50 mW (WLAN unassociated) • Connected Standby 10mW • Radio disabled 8 mW
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity¹⁰	802.11b, 1Mbps : -93.5dBm maximum 802.11b, 11Mbps : -84dBm maximum 802.11a/g, 6Mbps : -86dBm maximum 802.11a/g, 54Mbps : -72dBm maximum 802.11n, MCS07 : -67dBm maximum 802.11n, MCS15 : -64dBm maximum 802.11ac, MCS0 : -84dBm maximum

Technical Specifications

Antenna type	802.11ac, MCS9 : -59dBm maximum High efficiency antenna with spatial diversity, mounted in the display enclosure
Form Factor	Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Dimensions	PCI-Express M.2 MiniCard Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
Weight	Type 2230 : 2.8g Or Type 1630 : 2g
Operating Voltage	3.3v +/- 9%
Temperature	Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C)
Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing)
Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF LED White – Radio ON

Technical Specifications

HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

Bluetooth Specification	4.0/4.1/4.2 Compliant
Frequency Band	2402 to 2480 MHz
Number of Available Channels	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
Data Rates and Throughput	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.

7. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices
8. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
9. Check latest software/driver release for updates on supported security features.
10. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

Technical Specifications

Near Field Communications Controller (optional)

Dimensions (L x W x H)	Module 25 mm by 10 mm by 2.0 mm
Chipset	NPC100
System interface	I2C
NFC RF standards	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 ISO/IEC 18092 ECMA-340 NFCIP-1 Target and Initiator ECMA-320 NFCIP-2
NFC Forum Support	Tag Type 1, Type 2, Type3 and Type 4, NFCIP-1 and NFCIP-2
Reader (PCD-VCD) Mode(1)	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 MIFARE 1K MIFARE 4K MIFARE DESFire FeliCa Jewel and Topaz cards
Card Emulation (PICC-VICC) Mode(1)	ISO/IEC 14443 A ISO/IEC 14443 B and B' MIFARE FeliCa
Frequency	13.56 MHz
NFC Modes Supported	Reader/Writer, Peer-to-Peer
Raw RF Data Rates	106, 212, 424, 848 kbps
Operating temperature	0°C to 70°C
Storage temperature	-20°C to 125°C
Humidity	10-90% operating 5-95% non-operating
Supply Operating voltage	2.97 to 5.5 Volts
I/O Voltage	1.8V or 3.3V

Technical Specifications

Power Consumption

(Booster enable, VBAT= 3.3V, VCC_BOOST = 5V)

Mode	Power Consumption, Typical
Polling	7.3 mA
Detected Test Tag Type 1	Total 283.8 mA Net Module 236.8 mA
Detected Test Tag Type 2	Total 288.8 mA Net Module 241.8 mA
Detected Test Tag Type 3	Total 287.7 mA Net Module 240.7 mA
Detected Test Tag Type 4	Total 282.3 mA Net Module 235.3 mA
Antenna	Antenna connector, 0.5mm pitch, 7 connector FPC. Antenna matching is external to module.

POWER

AC Adapter 65 Watt nPFC USB type C™

Dimensions	74x74x28.5mm
Weight	unit: 245g +/- 10g
Input	Input Efficiency 81.5% min at 115 Vac/ 230Vac @ 5V/3A 86.7% min at 115 Vac/ 230Vac @ 9V/3A 88% min at 115 Vac/ 230Vac @ 10V/5A 88% min at 115 Vac/ 230Vac @ 12V/5A 89% min at 115 Vac/ 230Vac @ 15V/4.33A 89% min at 115 Vac/ 230Vac @ 20V/3.25A
Output	Input frequency range 47 ~ 63 Hz Input AC current 1.7 A at 90 VAC and maximum load Output power 65W DC output 5V/9V/10V/12V/15V/20V Hold-up time 5ms at 115 Vac input Output current limit <8.0A
Environmental Design	Operating temperature 32°F to 95°F (0° to 35°C) Non-operating (storage) temperature -4°F to 185°F (-20° to 85°C) Altitude 0 to 16,400 ft (0 to 5000m) Humidity 5% to 95% Storage Humidity 5% to 95%
EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 100,000 hours at 25°C ambient condition.

Technical Specifications

AC Adapter 45 Watt nPFC USB type C™	Dimensions	62.0x62.0x28.5mm	
	Weight	unit: 220g +/- 10g	
Output	Input	Input Efficiency Average Efficiency of 25%, 50%, 75%, 100% load condition with 115Vac/230Vac Spec:5V : 81.5%9V : 86.7%10V : 87.5%12V : 87.8%15V : 87.8%20V : 87.8%	
	Connector	Input frequency range	47 ~ 63Hz
		Input AC current	Max. 1.4 A at 90 Vac
	Environmental Design	Output power	5V/15W 9V/27W 10V/37.5W 12V/45W 15V/45W 20V/45W
		DC output	5V / 9V / 10V /12V / 15V / 20V
		Hold-up time	5ms at 115 Vac input
		Output current limit	<5.0A
		USB Type-C™	
	Safety Certifications	Operating temperature	32°F to 95°F (0°to 35°C)
		Non-operating (storage) temperature	-4oF to 185oF (-20oto 85oC)
Altitude		0 to 16,400 ft (0 to 5000m)	
Humidity		20% to 95%	
	Storage Humidity	10% to 95%	
	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 200,000 hours at 25°C ambient condition.		

Technical Specifications

HP 45W Smart AC adapter	Dimensions	3.74 x 1.57 x 1.04 in (9.5 x 4.0 x 2.65 cm)		
	Weight	0.386 lb (175g) max		
	Input	Input Efficiency	87.74% at 115Vac and 88.4% at 230Vac	
		Input frequency range	47 ~ 63Hz	
		Input AC current	Max. 1.4 A at 90 Vac	
	Output	Output power	45W	
		DC output	19.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<8.0A	
		Connector	4.5mm Barrel Type, 3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)	
		Non-operating (storage) temperature	-4° to 185° F (-20° to 85° C)	
		Altitude	0 to 16,400 ft (0 to 5000m)	
		Humidity	20% to 95%	
Storage Humidity		10% to 95%		
Safety Certifications	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 200,000 hours at 25°C ambient condition.			
HP 65W Smart AC adapter	Dimensions	107.0x47.0x30.0mm		
	Weight	unit: 250g +/- 10g		
	Input	Input Efficiency	88.0 % at 115 Vac and 89.0 % at 230Vac	
		Input frequency range	47 ~ 63 Hz	
		Input AC current	Max. 1.7 A at 90 Vac	
	Output	Output power	65W	
		DC output	19.5V	
		Hold-up time	5ms at 115 Vac input	
		Output current limit	<11.0A	
		Connector	4.5mm Barrel Type	
	Environmental Design	Operating temperature	32°F to 95°F (0°to 35°C)	
		Non-operating (storage) temperature	-4°F to 185°F (-20° to 85°C)	
		Altitude	0 to 16,400 ft (0 to 5000m)	
		Humidity	20% to 95%	
Storage Humidity		10% to 95%		
Safety Certifications	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 200,000 hours at 25°C ambient condition.			

Technical Specifications

HP 65W EM Smart AC adapter	Dimensions	102x55x30mm	
	Weight	270g +/- 10g	
	Input	Input Efficiency	87% min at 115V/230V
		Input frequency range	47 to 63 Hz
	Output	Input AC current	1.7 A at 90 VAC and maximum load
		DC output	65W(19.5V/3.33A)
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	4.5mm Barrel Type, 3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	0° to 35° C
		Non-operating (storage) temperature	-20° to 85° C
		Altitude	0 to 5,000 m
		Humidity	0% to 95%
Storage Humidity		0% to 95%	
Safety Certifications	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 200,000 hours at 25°C ambient condition.		
Battery TT 3 Cell WHr 56 Long Life -PL	Dimensions (H x W x L)	L 281.7mm x W 79.65mm x H 7.15mm	
	Weight	219 +/- 10g	
	Cells/Type	3cell Lithium-Ion Polymer cell / P615383A1	
	Energy	Voltage	11.55V/
		Amp-hour capacity	4.610Ah/ 4.850Ah
		Watt-hour capacity	506 Wh
	Temperature	Operating (Charging)	0° to 50° C
		Operating (Discharging)	-10° to 60° C
	Fuel Gauge LED	N/A	
	Warranty	3 years	
Optional Travel Battery Available	No		

Technical Specifications

ENVIRONMENTAL

Eco-Label Certifications & declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT® Gold registered in the United States. See <http://www.epeat.net> for registration status in your country.

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a “Typically Configured Notebook”.

Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	7.38 W	7.86 W	7.56 W
Normal Operation (Long idle)	3.58 W	4.01 W	3.91 W
Sleep	0.88 W	0.94 W	0.9 W
Off	0.48 W	0.53 W	0.49 W

NOTE: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	25 BTU/hr	27 BTU/hr	26 BTU/hr
Normal Operation (Long idle)	12 BTU/hr	14 BTU/hr	13 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Technical Specifications

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (L _{WAd} , bels)	Sound Pressure (L _{pAm} , decibels)
Typically Configured – Idle	2.6	16
Fixed Disk – Random writes	3.7	22
Longevity and Upgrading	<p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:</p> <ul style="list-style-type: none"> • 3 USB ports • 1 PC card slot (type I/II) • 1 ExpressCard/54 slot • 1 IEEE 1394 Port • 2 SODIMM memory slots • Optional expansion base docking station • 1 multi-bay II storage port • Interchangeable HDD <p>Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.</p>	
Batteries	<p>This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain: Mercury greater the 1ppm by weight Cadmium greater than 20ppm by weight</p> <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p>	
Additional Information	<ul style="list-style-type: none"> • This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC. • This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. • This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). • This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see www.epeat.net • Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. • This product contains 0% post-consumer recycled plastic (by wt.) • This product is 95.1% recycle-able when properly disposed of at end of life. 	
Packaging Materials	<p>External: PAPER/Corrugated</p> <p>Internal: PLASTIC/Expanded Polyethylene - EPE</p> <p>PLASTIC/Polyethylene low density - LDPE</p> <p>PLASTIC/Polypropylene - PP</p>	<p>345 g</p> <p>4 g</p> <p>76 g</p> <p>15 g</p> <p>The plastic packaging material contains at least 50% recycled content. The corrugated paper packaging materials contains at least 70% recycled content.</p>

Technical Specifications

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Technical Specifications

HP Inc.

For more information about HP's commitment to the environment:

**Corporate
Environmental
Information**

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842>

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

COUNTRY OF ORIGIN

China

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
Cases	HP Exec Midnight 15.6" Backpack	1KM16AA
	HP Slim Top Load	F3W15AA
Docking	HP Thunderbolt Dock 120W G2 (Available in May 2018)	2UK37AA
	HP USB-C Universal Dock	1MK33AA
	HP USB-C Mini Dock	1PM64AA
	HP UltraSlim Docking Station	D9Y32AA
	HP USB-C Dock G4	3FF69AA
	HP Elite 90W Thunderbolt 3 Dock	1DT93AA
Input/Output	HP Slim Wireless Keyboard and Mouse	T6L04AA
	HP Slim USB Keyboard and Mouse	T6T83AA
	HP Wireless (Link-5) Keyboard	T6U20AA
	HP Wireless Premium Mouse	1JR31AA
	HP USB Premium Mouse	1JR32AA
	HP Comfort Grip Wireless Mouse	H2L63AA
	HP Ultra Mobile Wireless Mouse	H6F25AA
	HP Slim Bluetooth Mouse	F3J92AA
	HP Elite Presenter Mouse	2CE30AA
	HP USB-C to USB-A Hub	Z6A00AA
	HP USB-C to DP	N9K78AA
	HP USB-C to VGA	N9K76AA
	HP HDMI to DVI	F5A28AA
	HP HDMI to VGA	H4F02AA
HP USB-C to HDMI 2.0	1WC36AA	
Power	HP 45W USB-C Power Adapter	1HE07AA
	HP 65W USB-C Power Adapter	1HE08AA
	HP Notebook Power Bank	N9F71AA
	HP USB-C Notebook Power Bank	1TZ86AA
	HP 65W Slim AC Adapter	H6Y82AA
	HP 90W Slim AC Adapter	H6Y83AA
HP 90W Slim Combo AC Adapter w/ USB	H6Y84AA	
Storage	HP USB External DVDRW Drive	F2B56AA
	HP 256GB M2 PCIe NVME SSD TLC (2280)	1FU87AA
	HP 512GB M2 PCIe NVME SSD TLC (2280)	1FU88AA
Memory	HP 4GB 2400MHz DDR4 Memory	Z4Y84AA
	HP 8GB 2400MHz DDR4 Memory	Z4Y85AA
	HP 16GB 2400MHz DDR4 Memory	Z4Y86AA

Options and Accessories (sold separately and availability may vary by country)

Security	HP Docking Station Cable Lock	AU656AA
	HP Keyed Cable Lock	TOY14AA
	HP Keyed Cable Lock 10mm	T1A62AA
	HP Dual Head Keyed Cable Lock	T1A64AA
UCC	HP USB Collaboration Keyboard	Z9N38AA
	HP Wireless Collaboration Keyboard	Z9N39AA
	HP UC Wireless Mono Headset	W3K08AA
	HP UC Wireless Duo Headset	W3K09AA
	HP UC Speaker Phone	K7V16AA
Displays	HP EliteDisplay E273m 27-inch Monitor	1FH51AA
	HP EliteDisplay E273q 27-inch Monitor	1FH52AA
	HP EliteDisplay E243 23.8-inch Monitor	1FH47AA

Summary of Changes

Date of change:	Version History:		Description of change:
February 12, 2018	V1 to V2	Update	Processor speed updated
February 28, 2018	V2 to V3	Update	256GB 2280 PCIe NVMe Value Solid State Drive features added
March 12, 2018	V3 to V4	Update	Processors list updated
May 7, 2018	V4 to V5	Update	Display support matrix moved to Display Support section
May 14, 2018	V5 to V6	Update	Displays and At a glance sections updated; environmental data added and docking at options section updated
June 19, 2018	V6 to V7	Update	Primary battery
July 16, 2018	V7 to V8	Update	Hidden functions
July 23, 2018	V8 to V9	Update	Software section
August 9, 2018	V8 to V9	Remove	Software HP Velocity
October 3, 2018	V9 to V10	Update	Display section

Copyright © 2018 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Bluetooth is a trademark of its proprietor and used by HP Inc. under license. Intel®, Core™, Thunderbolt and Intel® vPro are trademarks of Intel® Corporation or its subsidiaries in the U.S. and/or other countries. USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.