


### Overview

#### HP EliteBook 840 G5 Healthcare Edition Notebook PC

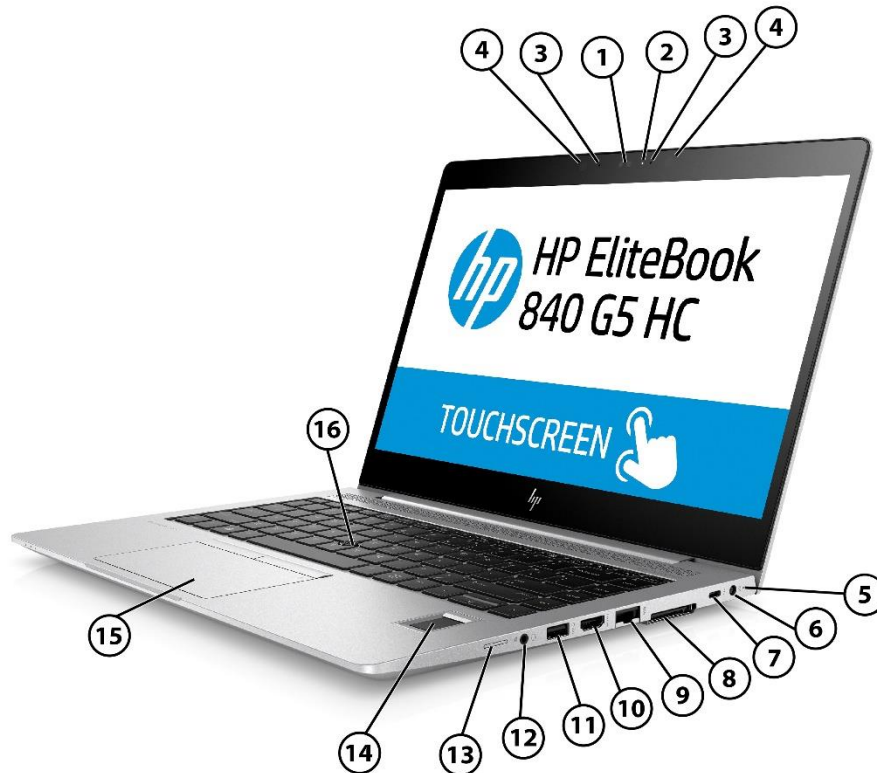

#### Left

1. Webcam and IR Camera
2. Webcam LED
3. Internal microphones
4. IR Camera LEDs
5. Charging light
6. Power connector
7. USB Type-C™ with Thunderbolt™
8. Docking connector
9. Ethernet port
10. HDMI port (Cable not included)
11. USB 3.1 Gen 1 port
12. Audio combo jack
13. SIM card slot<sup>1</sup>
14. Fingerprint reader (Select models)
15. Clickpad and RFID/NFC tap area (select models)
16. Pointstick

1. All units have a SIM card slot and icon but units that do not support WWAN are shipped with a non-removable SIM slot plug

### Overview



#### Right

1. Indicator LEDs:
  - Power light
  - Wireless light
  - Storage usage light
2. Smartcard Reader (Select models)
3. USB 3.1 Gen 1 charging port
4. Security Lock slot (Lock sold separately)
5. Power button

### Overview

#### AT A GLANCE

- Engineered for sanitization with germicidal wipes every shift, every day (please see Cleaning Instructions for supported wipes)<sup>4,5</sup>
- Integrated single sign-on badge capability<sup>1</sup>
- Integrated FIPS-201 compliant fingerprint reader for electronic prescribing of medication<sup>1</sup>
- EN60601-1-2:2015 compliant for EMI safety
- World class security and manageability with HP Sure Start Gen 4, HP Sure View, HP Sure Run, HP Sure Restore, HP Sure Click, HP MIK, HP WorkWise, IR Camera, SmartCard Reader<sup>1</sup>, Fingerprint reader<sup>1</sup>, Self-encrypting SSDs<sup>1</sup>, and Absolute Computrace embedded<sup>1</sup>
- HP Sure View 14.0" 700nit FHD IPS display
- Supports fast charging (50% in 30 minutes) with no impact on battery recharge cycles<sup>2</sup>
- Featuring HP Collaboration Keyboard with Clickpad to manage most commonly used conferencing functions with a single keystroke
- Experience telemedicine with an HD camera and Infrared camera with multi-array noise-cancelling microphones and loud top-firing speakers (74dB)
- Designed to support all HP docking options including HP's traditional Ultralim mechanical dock and all-new Thunderbolt™ dock.<sup>1</sup>
- Choice of 8th Generation Intel® Core™ i5, i7 Quad-core Processors and 7th generation Intel® Core™ i5 Dual-core Processors
- Preinstalled with Windows 10 versions or FreeDOS
- AMD Radeon RX540 discrete graphics with 2 GB GDDR5 video memory<sup>1</sup>
- HP Long Life Battery
- MIL-STD testing<sup>3</sup>

1. Sold separately or as an optional feature.

2. Recharges your battery up to 50% within 30 minutes when the system is off or in standby mode. Power adapter with a minimum capacity of 65 watts is required. After charging has reached 50% capacity, charging will return to normal. Charging time may vary +/-10% due to System tolerance.

The Long Life battery will have same 1-year or 3-year limited warranty as the platform. HP Long-Life Rechargeable batteries are designed to last 1,000 battery cycles based on typical use over a 3-yr period.

3. MIL-STD-810G testing is conducted on all HP EliteBook products. Testing is not intended to demonstrate fitness of U.S. Department of Defense (DoD) contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Accidental damage requires an optional HP Accidental Damage Protection Care Pack

**NOTE: See important legal disclosures for all listed specs in their respective features sections.**

### Features

#### PRODUCT NAME

HP EliteBook 840 G5 Healthcare Edition Notebook PC

#### OPERATING SYSTEM

<b>Preinstalled</b>	Windows 10 Pro 64 <sup>1</sup> Windows 10 Home 64 <sup>1</sup> FreeDOS 2.0
---------------------	--

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com/>.

#### PROCESSORS

Intel® Core™ i5-7200U with Intel® HD Graphics 620 (2.5 GHz base frequency, up to 3.1 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)<sup>2,3,4</sup>

Intel® Core™ i5-7200U with AMD Radeon™ RX 540 with 2 GB GDDR5 dedicated (2.5 GHz base frequency, up to 3.1 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)<sup>2,3,4</sup>

Intel® Core™ i5-7300U vPro™ processor with Intel® HD Graphics 620 (2.6 GHz base frequency, up to 3.5 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)<sup>2,3,4</sup>

Intel® Core™ i5-7300U vPro™ processor with AMD Radeon™ RX 540 with 2 GB GDDR5 dedicated (2.6 GHz base frequency, up to 3.5 GHz with Intel® Turbo Boost Technology, 3 MB cache, 2 cores)<sup>2,3,4</sup>

Intel® Core™ i5-8250U with Intel® UHD Graphics 620 (1.6 GHz base frequency, up to 3.4 GHz with Intel® Turbo Boost Technology, 6 MB cache, 4 cores)<sup>2,3,4</sup>

Intel® Core™ i5-8250U with AMD Radeon™ RX 540 with 2 GB GDDR5 dedicated (1.6 GHz base frequency, up to 3.4 GHz with Intel® Turbo Boost Technology, 6 MB cache, 4 cores)<sup>2,3,4</sup>

Intel® Core™ i5-8350U vPro™ processor with Intel® UHD Graphics 620 (1.7 GHz base frequency, up to 3.6 GHz with Intel® Turbo Boost Technology, 6 MB cache, 4 cores)<sup>2,3,4</sup>

Intel® Core™ i5-8350U vPro™ processor with AMD Radeon™ RX 540 with 2 GB GDDR5 dedicated (1.7 GHz base frequency, up to 3.6 GHz with Intel® Turbo Boost Technology, 6 MB cache, 4 cores)<sup>2,3,4</sup>

Intel® Core™ i7-8550U with Intel® UHD graphics 620 (1.8 GHz base frequency, up to 4 GHz with Intel® Turbo Boost Technology, 8 MB cache, 4 cores)<sup>2,3,4</sup>

Intel® Core™ i7-8550U with AMD Radeon™ RX 540 with 2 GB GDDR5 dedicated (1.8 GHz base frequency, up to 4 GHz with Intel® Turbo Boost Technology, 8 MB cache, 4 cores)<sup>2,3,4</sup>

Intel® Core™ i7-8650U vPro™ processor with Intel® UHD graphics 620 (1.9 GHz base frequency, up to 4.2 GHz with Intel® Turbo Boost Technology, 8 MB cache, 4 cores)<sup>2,3,4</sup>

Intel® Core™ i7-8650U vPro™ processor with AMD Radeon™ RX 540 with 2 GB GDDR5 dedicated (1.9 GHz base frequency, up to 4.2 GHz with Intel® Turbo Boost Technology, 8 MB cache, 4 cores)<sup>2,3,4</sup>

##### Processor Family

7th Generation Intel® Core™ i5 processor (i5-7300, i5-7200 models)

8th Generation Intel® Core™ i5 processor (i5-8350, i5-8250 models)

8th Generation Intel® Core™ i7 processor (i7-8650, i7-8550 models)

2. Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering branding and/or naming is not a measurement of higher performance.

3. Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

### Features

4. NOTE: In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

---

### CHIPSET

Integrated with processor

---

### GRAPHICS

#### Integrated

Intel® HD Graphics 620<sup>5</sup>  
Intel® UHD Graphics 620<sup>5</sup>

#### Discrete

AMD Radeon™ RX 540 (2 GB GDDR5 dedicated)<sup>6,7</sup>  
Support HD decode, DX12, HDMI 1.4b<sup>5,8</sup>

5. HD content required to view HD images.

6. Sold separately or as an optional feature.

7. AMD Dynamic Switchable Graphics technology requires an Intel processor, plus an AMD Radeon™ discrete graphics configuration and is not available on FreeDOS and Linux OS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be).

8. HDMI cable sold separately.

---

### DISPLAY

#### Touch

HP Sure View Integrated Privacy Screen 35.6 cm (14") diagonal FHD IPS LED-backlit touch screen with Corning® Gorilla® Glass 3, 700 cd/m<sup>2</sup> (nits), 72% sRGB with HD IR webcam for WWAN (1920 x 1080)<sup>5,6,9</sup>

#### HDMI 1.4b

Supports resolution up to 4k @ 24Hz

#### Displays support

Supports 2 independent displays when on the HP Ultrastim Dock - Max. resolution = 2.5K @ 60Hz (DP1) & 2.5K @ 60Hz (DP2)  
Supports 2 independent displays when on the HP Thunderbolt™ Dock G2 - Max. resolution = 4K @ 60Hz (DisplayPort) & 4K @ 60Hz (ThunderBolt)

5. HD content required to view HD images.

6. Sold separately or as an optional feature.

9. Resolutions are dependent upon monitor capability, and resolution and color depth settings.

---

### Features

#### STORAGE AND DRIVES

##### Primary M.2 Storage

128 GB SATA-3 SS TLC<sup>10</sup>  
256GB PCIe NVMe Value SS TLC<sup>10</sup>  
256 GB PCIe Gen3x4 NVMe SS TLC<sup>10</sup>  
256 GB SATA-3 SS TLC Opal 2<sup>10</sup>  
360 GB PCIe Gen3x4 NVMe SS TLC (Intel®)<sup>10</sup>  
512 GB PCIe Gen3x4 NVMe SS TLC<sup>10</sup>  
512 GB PCIe Gen3x4 NVMe SS TLC Opal 2<sup>10</sup>  
512 GB SATA-3 SS TLC FIPS-140-2<sup>10</sup>  
1 TB PCIe Gen3x4 NVMe SS TLC<sup>10</sup>

10. For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10) is reserved for system recovery software.

---

#### MEMORY

##### Maximum Memory

32 GB DDR4-2400 SDRAM<sup>11</sup>

##### Memory

32 GB DDR4-2400 SDRAM (2 X 16 GB)<sup>11</sup>  
16 GB DDR4-2400 SDRAM (1 X 16 GB)<sup>11</sup>  
16 GB DDR4-2400 SDRAM (2 X 8 GB)<sup>11</sup>  
8 GB DDR4-2400 SDRAM (1 x 8 GB)<sup>11</sup>  
8 GB DDR4-2400 SDRAM (2 x 4 GB)<sup>11</sup>  
4 GB DDR4-2400 SDRAM (1 x 4 GB)<sup>11</sup>

##### Memory Slots

2 SODIMM  
Both slots are upgradeable  
System runs at 2133 for Intel® 7th generation processors  
System runs at 2400 for Intel® 8th generation processors  
Supports Dual Channel Memory.

11. Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

---

### Features

#### NETWORKING/COMMUNICATIONS

##### WLAN

Intel® Dual Band Wireless-AC 8265 802.11a/b/g/n/ac (2x2) Wi-Fi® and Bluetooth® 4.2 Combo, vPro™<sup>12</sup>  
Intel® Dual Band Wireless-AC 8265 802.11a/b/g/n/ac (2x2) Wi-Fi® and Bluetooth® 4.2 Combo, non-vPro™<sup>12</sup>  
Realtek RTL8822BE 802.11ac (2x2) Wi-Fi® and Bluetooth® 4.2 Combo, non-vPro™<sup>12</sup>

##### WWAN

HP lt4132 LTE/HSPA+ w/GPS M.2<sup>13</sup>  
Intel® XMM™ 7360 LTE-Advanced<sup>13</sup>

##### NFC

NXP NPC300 Near Field Communication Module

##### Miracast

Native Miracast Support<sup>14</sup>

##### Ethernet

Intel® I219-LM 10/100/1000 GbE, vPro™<sup>15</sup>  
Intel® I219-V 10/100/1000 GbE, non-vPro™<sup>15</sup>

##### RFID

Ritani RFIdeas HF/LF RFID Read SE Module without SE Security Access Module (SE SAM)<sup>16</sup>

12. Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

13. WWAN module requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors. 4G LTE not available on all products, in all regions.

14. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>.

15. The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

16. SE Security Access Module (SE SAM) is a separate hardware SIM inserted into the RFID reader and is required to support SE, SEOS, and iClass credentials for reading HID/iClass card types.

---

#### AUDIO/MULTIMEDIA

##### Audio

Audio by Bang & Olufsen  
Integrated Multi Array Microphones (with World-facing 3rd mic)  
2 Integrated Stereo Speakers

##### Camera

720p HD and IR webcam supporting Wide Dynamic Range<sup>5</sup>

5. HD content required to view HD images.

### Features

#### **KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS**

##### **Keyboard**

HP Premium Collaboration Keyboard, backlit, dual point, spill resistant with drain, with HP Dura Keys

##### **Pointing Device**

Clickpad with multi-touch gestures enabled, taps enabled as default

Microsoft Precision Touchpad Default Gestures Support

##### **Function Keys**

F1 - Display Switching

F2 - Privacy

F3 - Brightness Down

F4 - Brightness Up

F5 - Audio Mute

F6 - Volume Down

F7 - Volume Up

F8 - Mic Mute

F9 - Backlit Toggle

F10 - numlk

F11 - Wireless

F12 - Calendar

Share/Present

Call Answer

Call End

##### **Hidden Fuction Keys**

Fn+R - Break

Fn+S - Sys Rq

Fn+C - Scroll Lock



### Features

#### SOFTWARE AND SECURITY

##### Preinstalled Software

###### BIOS

- HP BIOSphere Gen4<sup>17</sup>
- HP Drive Lock & Automatic Drive Lock<sup>43</sup>
- BIOS Update via Network
- Master Boot Record Security
- Power On Authentication
- Secure Erase<sup>18</sup>
- Absolute Persistence Module<sup>19</sup>
- Pre-boot Authentication
- HP Wireless Wakeup

###### Software

- HP Easy Clean<sup>42</sup>
- HP Native Miracast Support<sup>14</sup>
- HP LAN-Wireless Protection
- HP Velocity
- HP 3D DriveGuard
- HP ePrint Driver + JetAdvantage<sup>20</sup>
- HP Hotkey Support - CMIT
- HP Recovery Manager
- HP Jumpstart
- HP Support Assistant<sup>21</sup>
- HP Noise Cancellation Software
- HP PhoneWise<sup>28</sup>
- Buy Office

###### Manageability Features

- HP Driver Packs<sup>22</sup>
- HP System Software Manager (SSM)
- HP BIOS Config Utility (BCU)
- HP Client Catalog
- HP Manageability Integration Kit Gen2<sup>23</sup>
- Ivanti Management Suite<sup>24</sup>

###### Client Security Software

- HP Client Security Suite Gen4<sup>25</sup> including:
  - HP Security Manager<sup>26</sup> (including Credential Manager, HP Password Manager, HP Spare Key)
- FIPS-201 Compliant Fingerprint Sensor
- HP Fingerprint Sensor<sup>30</sup>
- HP Device Access Manager
- HP Power On Authentication
- Microsoft Defender<sup>27</sup>

### Features

#### Security Management

Secure Erase<sup>18</sup>

TPM 2.0 Embedded Security Chip shipped with Windows 10 (Common Criteria EAL4+ Certified)

SATA 0,1 port disablement (viaBIOS)

RAID configurations<sup>31</sup>

Serial, USB enable/disable (viaBIOS)

Power-on password (viaBIOS)

Setup password (viaBIOS)

Support for chassis padlocks and cable lock devices

Integrated hood sensor

HP Sure Click<sup>32</sup>

HP Sure Start Gen4<sup>29</sup>

HP Sure Run<sup>33</sup>

HP Sure Recover<sup>34</sup>

#### TPM

Model: Infineon SLB9670

Version: 7.62.3126.0

Revision: TPM 2.0

FIPS 140-2 Compliant: Yes (select models only)

#### Smartcard Reader

Model number: Alcor AU9560

FIPS 201 Compliant: Yes

#### Fingerprint Sensor

HP Fingerprint Sensor<sup>30</sup>

FIPS-201 compliant fingerprint reader

#### IPv6 Certification:

Yes

**MD5 Hash:** Please follow the instructions below to access MD5 Hash.

Log-on to <http://hp.com/support>, enter your product name, select software and drivers, select OS, select driver. After selecting the driver, click on “Associated files” and then click on “Download”. When opening the file, under “Purpose” you should see the appropriate “SOFTPAQ MD5:” Field

**Is the BIOS on this notebook ISO/IEC 19678:2015 (formerly NIST 800-147) compliant?:**

Yes

UEFI version: 2.5

14. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you’re doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>.

17. HP BIOSphere Gen4 features may vary depending on the PC platform and configurations requires Windows and 8th Gen Intel® processors.

18. Secure Erase for the methods outlined in the National Institute of Standards and Technology Special Publication 800-88. Supported on Elite platforms with BIOS version F.03 or higher.

### Features

19. Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.
  20. HP ePrint Drive requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/eprintcenter>). Print times and connection speeds may vary.
  21. HP Support Assistant requires Windows and Internet access.
  22. HP Driver Packs not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>.
  23. HP Manageability Integration Kit can be downloaded from <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>
  24. Ivanti Management Suite subscription required.
  25. HP Client Security Suite Gen 4 requires Windows and Intel® or AMD 8th generation processors.
  26. HP Password Manager requires Internet Explorer or Chrome or FireFox. Some websites and applications may not be supported. User may need to enable or allow the add-on / extension in the internet browser.
  27. Microsoft Defender Opt in and internet connection required for updates.
  28. HP PhoneWise Client is only available on select platforms. For supported platforms and HP PhoneWise system requirements see <http://www.hp.com/go/HPPhoneWise>.
  29. HP Sure Start Gen4 is available on HP EliteBook products equipped with Intel® 8th generation processors Optional in front of the reader.
  30. HP Fingerprint Sensor sold separately or as an optional feature.
  31. RAID configuration is optional and does require a second hard drive.
  32. HP Sure Click is available on select HP platforms and supports Microsoft® Internet Explorer and Chromium™. Check <http://h20195.www2.hp.com/v2/GetDocument.aspx?docname=4AA7-0922ENW> for all compatible platforms as they become available.
  33. HP Sure Run is available on HP Elite products equipped with Intel® or AMD® 8th generation processors
  34. HP Sure Recover is available on HP Elite PCs with 8th generation Intel® or AMD processors and requires an open, wired network connection. You must back up important files, data, photos, videos, etc. before using HP Sure Recover to avoid loss of data.
  42. HP Easy Clean requires Windows 10 RS3 and will disable the keyboard, touchscreen, and touchpad only. Ports are not disabled.
  43. HP Drive Lock is not supported on NVMe drives.
-

### Features

#### POWER

##### Power Supply

HP Smart 45W External AC power adapter, 2-prong (Japan only)<sup>35</sup>

HP Smart 65W External AC power adapter<sup>35</sup>

HP Smart 65W EM External AC power adapter<sup>35</sup>

HP USB Type-C™ 65W External AC power adapter<sup>35</sup>

##### Primary Battery

HP Long Life 3-cell, 50 Wh Li-ion<sup>36</sup>

##### Power Cord

2-wire plug - 1.0m (Japan only)<sup>35</sup>

3-wire plug - 1.0m<sup>35</sup>

3-wire plug - 1.8m<sup>35</sup>

Duckhead power cord - 1.0m<sup>35</sup>

Duckhead power cord - 1.8m<sup>35</sup>

##### Battery Life

MobileMark 2014 run time:

Sharing mode: 11 hours 15 minutes

Privacy mode: 9 hours<sup>37</sup>

35. Availability may vary by country.

36. Battery is internal and not replaceable by customer. Serviceable by warranty.

37. Windows 10 MM14 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See <http://www.bapco.com> for additional details.

---

#### WEIGHTS & DIMENSIONS

##### Weight

Starting at 3.59 lb (touch)<sup>38</sup>

Starting at 1.63 kg (touch)<sup>38</sup>

##### Dimensions (w x d x h)

12.84 x 9.22 x 0.71 in

326 x 234.3 x 18.05 mm

38. Weight will vary by configuration.

### Features

#### PORTS/SLOTS

##### Ports

- 1 Thunderbolt™ (USB Type-C™ connector)
  - 2 USB 3.1 Gen 1 (1 charging)
  - 1 HDMI 1.4b<sup>8</sup>
  - 1 RJ-45
  - 1 Docking connector
  - 1 Headphone/microphone combo
  - 1 AC power
  - SIM card slot
  - Smartcard reader<sup>6</sup>
8. HDMI cable sold separately.  
6. Sold separately or as an optional feature.

#### ENVIRONMENTAL & INDUSTRY

<b>Environmental Data</b>	<b>Eco-Label Certifications &amp; declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>• IT ECO declaration</li> <li>• US ENERGY STAR®</li> <li>• US Federal Energy Management Program (FEMP)</li> <li>• EPEAT<sup>□</sup> Gold registered in the United States. See <a href="http://www.epeat.net">http://www.epeat.net</a> for registration status in your country. Search keyword <i>generator</i> on HP's 3rd party option store for solar energy accessory at <a href="http://www.hp.com/go/options">http://www.hp.com/go/options</a>.</li> <li>• TCO or TCO Certified Edge</li> </ul>		
	<b>System Configuration</b>  <b>Energy Consumption (in accordance with US ENERGY STAR® test method)</b>	<p>The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".</p>		
		<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 50Hz</b>
	Normal Operation (Sort idle)	8.24 W	8.11 W	7.97 W
	Normal Operation (Long idle)	3.95 W	3.41 W	3.46 W
	Sleep	0.85 W	0.88 W	0.85 W
	Off	0.50 W	0.53 W	0.50 W

### Features

	<p>Note:</p> <p>Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.</p>		
<b>Heat Dissipation*</b>	<b>115VAC, 60Hz</b>	<b>230VAC, 50Hz</b>	<b>100VAC, 50Hz</b>
Normal Operation (Short idle)	28 BTU/hr	28 BTU/hr	27 BTU/hr
Normal Operation (Long idle)	14 BTU/hr	12 BTU/hr	12 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr
	<p>*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.</p>		
<b>Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)</b>	Sound Power (L <sub>WAd</sub> , bels)		Sound Pressure (L <sub>pAm</sub> , decibels)
Typically Configured – Idle	2.9		16
Fixed Disk – Random writes	3.3		22
<b>Longevity and Upgrading</b>	<p>This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:</p> <ul style="list-style-type: none"> <li>• 3 USB ports</li> <li>• 1 PC card slot (type I/II)</li> <li>• 1 ExpressCard/54 slot</li> <li>• 1 IEEE 1394 Port</li> <li>• 2 SODIMM memory slots</li> <li>• Optional expansion base docking station</li> <li>• 1 multi-bay II storage port</li> <li>• Interchangeable HDD??</li> </ul>		

### Features

	Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.		
<b>Batteries</b>	<p>"This battery(s) in this product comply with EU Directive 2006/66/EC</p> <p>Batteries used in the product do not contain:            Mercury greater the 1ppm by weight            Cadmium greater than 20ppm by weight</p> <p>Battery size: CR2032 (coin cell)            Battery type: Lithium"</p>		
<b>Additional Information</b>	<ul style="list-style-type: none"> <li>• This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.</li> <li>• This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.</li> <li>• This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).</li> <li>• This product is in compliance with the IEEE 1680 (EPEAT) standard at the &lt; Gold &gt; level, see <a href="http://www.epeat.net">www.epeat.net</a></li> <li>• Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.</li> <li>• This product contains 0.0% post-consumer recycled plastic (by wt.)</li> <li>• This product is 93.6% recycle-able when properly disposed of at end of life.</li> </ul>		
<b>Packaging Materials</b>	<b>External:</b>	PAPER/Corrugated	357 g
	<b>Internal:</b>	PLASTIC/EPE (Expanded Polyethylene)	66 g
		PLASTIC/Polypropylene - PP	4 g
		PLASTIC/Polyethylene low density - LDPE	15 g
	The plastic packaging material contains at least 0.0% recycled content.		
	The corrugated paper packaging materials contains at least 80% recycled content.		
<b>Material Usage</b>	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a>):</p> <ul style="list-style-type: none"> <li>• Asbestos</li> <li>• Certain Azo Colorants</li> <li>• Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li> <li>• Cadmium</li> <li>• Chlorinated Hydrocarbons</li> <li>• Chlorinated Paraffins</li> <li>• Formaldehyde</li> <li>• Halogenated Diphenyl Methanes</li> <li>• Lead carbonates and sulfates</li> <li>• Lead and Lead compounds</li> <li>• Mercuric Oxide Batteries</li> <li>• Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li> <li>• Ozone Depleting Substances</li> <li>• Polybrominated Biphenyls (PBBs)</li> <li>• Polybrominated Biphenyl Ethers (PBBEs)</li> </ul>		

### Features

		<ul style="list-style-type: none"> <li>• Polybrominated Biphenyl Oxides (PBBOs)</li> <li>• Polychlorinated Biphenyl (PCB)</li> <li>• Polychlorinated Terphenyls (PCT)</li> <li>• Polyvinyl Chloride (PVC) – except for wires and cables, has been voluntarily removed from most applications.</li> <li>• Radioactive Substances</li> <li>• Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li> </ul>
	<p><b>Packaging Usage</b></p>	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"> <li>• Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li> <li>• Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li> <li>• Design packaging materials for ease of disassembly.</li> <li>• Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>• Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>• Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>• Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>
	<p><b>End-of-life Management and Recycling</b></p>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/go/reuse-recycle">http://www.hp.com/go/reuse-recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/recyclers">http://www.hp.com/go/recyclers</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>
	<p><b>HP, Inc. Corporate Environmental Information</b></p>	<p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report  <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a></p> <p>Eco-label certifications  <a href="http://www8.hp.com/us/en/hp-information/environment/ecolabels.html">http://www8.hp.com/us/en/hp-information/environment/ecolabels.html</a></p> <p>ISO 14001 certificates:  <a href="http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842">http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842</a>  <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf</a></p>



### Features

#### **SERVICE AND SUPPORT**

HP Services offers 3-year and 1-year limited warranties and 90 day software limited warranty options depending on country. The Long Life battery will have same 1-year or 3-year limited warranty as the platform. On-site service and extended coverage is also available. HP Care Pack Services are optional extended service contracts that go beyond the standard limited warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/cpc>.

39. HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc). HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

---

### Features

#### CLEANING INSTRUCTIONS

**If there is visible soiling of the computer surface:**

- First turn off the computer to prevent electric shock or damage to components.
  - Disconnect AC power.
  - Disconnect all powered external devices.
- Wipe the exterior of the computer with a soft, water-dampened cloth to remove the soil as needed.
  - The cloth should be of dry microfiber or a chamois (static-free cloth without oil), or static-free cloth wipes.
  - The cloth should be moist but not wet. Water dripping into the ventilation or other points of ingress can cause damage.
  - Please do not use fibrous materials, such as paper towels, as these can scratch the computer. Over time, dirt and cleaning agents can get trapped in the scratches.
- Allow the unit to air-dry before use or before additional cleaning with germicidal wipes.

**If there is no visible soiling of the computer surface:**

- Launch the HP Easy Clean software application that came with your computer. This will disable the keyboard, display, and clickpad. (Or you could alternatively choose to put the computer in Sleep mode or turn off the computer).
- Next, use any of the following germicidal wipe formulations to safely disinfect all exposed surfaces of your computer including the keyboard, display, clickpad, and chassis. (Refer to the directions for use provided by the manufacturer of the wipes):
  - Formula 1
    - Benzyl-C12-18-alkyldimethyl ammonium chlorides: <0.1%
    - Quaternary ammonium compounds, C12-14-alkyl[(ethylphenyl)methyl]di methyl, chlorides: <0.1%
  - Formula 2
    - 2-Butoxyethanol: <5%
    - Isopropanol: 10 - 20%
    - 2-Butoxyethanol: 5%
    - Benzyl-C12-18-alkyldimethyl ammonium chlorides: <0.5 %
    - Quaternary ammonium compounds, C12-18-alkyl [(ethylphenyl) methyl]dimethyl, chlorides: <0.5%
  - Formula 3
    - Quaternary ammonium compounds, C12-18-alkyl [(ethylphenyl) methyl] dimethyl, chlorides: <0.5%
    - Benzyl-C12-18-alkyldimethyl ammonium chlorides: <0.5%
  - Formula 4
    - Isopropyl alcohol: 55.0%
    - Alkyl dimethyl benzyl ammonium chlorides: 0.25%
    - Alkyl (68% C12, 32% C14) dimethyl ethylbenzyl ammonium chloride: 0.25%
  - Formula 5
    - Isopropanol: 10 - 20%
    - Ethylene Glycol Monobutyl Ether (2-Butoxyethanol): 1-5%
    - Diisobutylphenoxyethoxyethyl dimethyl benzyl ammonium chloride: 0.1-0.5%
  - Formula 6
    - Sodium hypochlorite 0.1-1%
  - Formula 7
    - Cellulose: 10-30%
    - Ethyl alcohol: 0.10-1.00%
  - Formula 8
    - Isopropyl alcohol: 30-40%
    - Water: 60 – 70%
- Please do not use cleaners that contain any petroleum based materials such as benzene or thinner. These may damage the notebook.
- Do not close the computer until you've allowed it to completely air-dry.
- Once the surface is dry, the computer is ready for use again. Depending on how you readied the computer earlier, either exit the HP Easy Clean software, remove the computer from Sleep mode, or turn the computer back on to start using your computer again

### Features

#### Compatible Gloves

- Touch on the screen and clickpad is tuned for support with bare hands and with the following list of surgical and exam gloves:
  - McKesson Perry® Performance Plus Sterile Surgical Gloves
  - Smart Practice Neo Soothe Sterile Surgical Fitted Gloves
  - SKINTX Nitrile Exam Gloves
  - Precision Disposable Products Disposable Medical Exam Gloves
  - Medline SensiCare Exam Gloves
  - Kimberly Clark Safety Safeskin Exam Gloves

### Technical Specifications

#### SYSTEM UNIT

<b>Stand-Alone Power Requirements</b> (AC Power)	<b>Nominal Operating Voltage</b>	19V
	<b>Average Operating Power</b>	Win 10
	<b>Integrated Graphics</b>	6.78W
	<b>Discrete Graphics</b>	18W
	<b>Max Operating Power</b>	Discrete < 65W UMA < 45W
	<b>Temperature</b>	
	<b>Operating</b>	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	<b>Non-operating</b>	-4° to 140° F (-20° to 60° C)
<b>Relative Humidity</b>	<b>Operating</b>	10% to 90%, non-condensing
	<b>Non-operating</b>	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
<b>Shock</b>	<b>Operating</b>	40 G, 2 ms, half-sine
	<b>Non-operating</b>	200 G, 2 ms, half-sine
<b>Random Vibration</b>	<b>Operating</b>	0.75 grms
	<b>Non-operating</b>	1.50 grms
<b>Altitude</b> (unpressurized)	<b>Operating</b>	-50 to 10,000 ft (-15.24 to 3,048 m)
	<b>Non-operating</b>	-50 to 40,000 ft (-15.24 to 12,192 m)
<b>Planned Industry Standard Certifications</b>	<b>UL</b>	Yes
	<b>CSA</b>	Yes
	<b>FCC Compliance</b>	Yes
	<b>ENERGY STAR®</b>	Select models <sup>11</sup>
	<b>EPEAT®</b>	Registered Gold in United States <sup>8</sup>
	<b>ICES</b>	Yes
	<b>Australia / NZ A-Tick Compliance</b>	Yes
	<b>CCC</b>	Yes
	<b>Japan VCCI Compliance</b>	Yes
	<b>KC</b>	Yes
	<b>BSMI</b>	Yes
	<b>CE Marking Compliance</b>	Yes
	<b>BNCI or BELUS</b>	Yes
	<b>CIT</b>	Yes
	<b>GOST</b>	Yes
	<b>Saudi Arabian Compliance (ICCP)</b>	Yes
<b>SABS</b>	Yes	
	<b>UKRSERTCOMPUTER</b>	

11. Configurations of the HP Elitebook 840 G5 that are ENERGY STAR® qualified are identified as HP Elitebook 840 G5 ENERGY STAR on HP websites and on <http://www.energystar.gov>.

8. EPEAT® registered where applicable. EPEAT registration varies by country. See <http://www.epeat.net> for registration status by country. Search keyword generator on HP's 3rd party option store for solar generator accessories at <http://www.hp.com/go/options>.

### Technical Specifications

#### DISPLAYS

**Panel LCD 14 inch FHD  
(1920x1080) Anti-Glare WLED  
UWVA 72% cg 700nits eDP  
1.3+PSR ultraslim Privacy**

<b>Outline Dimensions (W x H)</b>	315.41x 196.14 max.
<b>Active Area</b>	309.312 x 173.988
<b>Weight</b>	<225g max.
<b>Diagonal Size</b>	14.0"
<b>Thickness</b>	3.0mm max.
<b>Interface</b>	eDP 1.4a
<b>Surface Treatment</b>	IPS
<b>Touch Enabled</b>	Yes
<b>Contrast Ratio</b>	Sharing mode, 600:1 (typ.) Privacy mode, 150:1 (typ.)
<b>Refresh Rate</b>	120Hz
<b>Brightness</b>	Sharing mode, 700 nits (typ.) Privacy mode, 350 nits (typ.)
<b>Pixel Resolution</b>	1920 x 1080 (FHD)
<b>Format</b>	RGB
<b>Backlight</b>	LED
<b>Color Gamut Coverage</b>	Sharing mode, 72% Privacy mode, 60%
<b>Color Depth</b>	6 bits + Hi FRC
<b>Viewing Angle</b>	Sharing mode, CR >10, L/R/U/D, 85/85/85/85 (typ.) Privacy mode CR>2, L/R/U/D, 50/50/85/85 (typ.)

### Technical Specifications

#### STORAGE<sup>1</sup>

<b>SSD 128 GB 2280 M2 SATA-3 TLC</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	128 GB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	ATA-8, SATA 3.0
	<b>Maximum Sequential Read</b>	Up To 520 MB/s
	<b>Maximum Sequential Write</b>	Up To 450 MB/s
	<b>Logical Blocks</b>	250,069,680
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Security Features</b>	DIPM; TRIM; DEVSLP

---

<b>SSD 1 TB 2280 PCIe-3x4 NVMe TLC SS</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	1 TB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	PCIe NVMe Gen3X4
	<b>Maximum Sequential Read</b>	Up To 2900 MB/s
	<b>Maximum Sequential Write</b>	Up To 2000 MB/s
	<b>Logical Blocks</b>	2,000,409,263
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Security Features</b>	TRIM; L1.2

---

<b>SSD 256 GB 2280 M2 PCIe-3x4 SS NVMe TLC</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	256 GB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	PCIe NVMe Gen3X4
	<b>Maximum Sequential Read</b>	Up To 2600 MB/s
	<b>Maximum Sequential Write</b>	Up To 900 MB/s
	<b>Logical Blocks</b>	500,118,192
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Security Features</b>	TRIM; L1.2

---

### Technical Specifications

<b>SSD 256 GB 2280 M2 SATA-3 Self Encrypted OPAL2 TLC</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	256 GB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	ATA-8, SATA 3.0
	<b>Maximum Sequential Read</b>	Up To 530 MB/s
	<b>Maximum Sequential Write</b>	Up To 515 MB/s
	<b>Logical Blocks</b>	500,118,192
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Security Features</b>	DIPM; TRIM; DEVSLP

<b>256 GB 2280 PCIe NVMe Value Solid State Drive</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	256 GB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	PCIe NVMe Gen3X4
	<b>Maximum Sequential Read</b>	Up To 1700 MB/s
	<b>Maximum Sequential Write</b>	Up To 600 MB/s
	<b>Logical Blocks</b>	500,118,192
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Security Features</b>	TRIM; L1.2

<b>SSD 360 GB 2280 PCIe-3x4 NVMe TLC</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	360 GB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	PCIe NVMe Gen3X4
	<b>Maximum Sequential Read</b>	Up To 1700 MB/s
	<b>Maximum Sequential Write</b>	Up To 600 MB/s
	<b>Logical Blocks</b>	703,282,608
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Features</b>	TRIM; L1.2

### Technical Specifications

<b>SSD 512 GB 2280 M2 PCIe-3x4 SS NVMe TLC</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	512GB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	PCIe NVMe Gen3X4
	<b>Maximum Sequential Read</b>	Up To 2600 MB/s
	<b>Maximum Sequential Write</b>	Up To 1400 MB/s
	<b>Logical Blocks</b>	1,000,215,216
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Features</b>	TRIM; L1.2

<b>SSD 512 GB 2280 M2 SATA-3 TLC FIPS</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	512 GB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	ACS-3, SATA 3.2
	<b>Maximum Sequential Read</b>	Up To 530 MB/s
	<b>Maximum Sequential Write</b>	Up To 400 MB/s
	<b>Logical Blocks</b>	1,000,215,216
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Features</b>	DIPM; TRIM; DEVSLP

<b>SSD 512 GB 2280 PCIe-3x4 NVMe Self Encrypted OPAL2 TLC</b>	<b>Drive Weight</b>	0.02 lb (10 g)
	<b>Capacity</b>	512 GB
	<b>Height</b>	0.09 in (2.3 mm)
	<b>Width</b>	0.87 in (22 mm)
	<b>Interface</b>	PCIe NVMe Gen3X4
	<b>Maximum Sequential Read</b>	Up To 2900 MB/s
	<b>Maximum Sequential Write</b>	Up To 1400 MB/s
	<b>Logical Blocks</b>	1,000,215,215
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [ambient temp]
	<b>Features</b>	TRIM; L1.2

1. For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10) is reserved for system recovery software.



### Technical Specifications

#### NETWORKING/COMMUNICATIONS

<b>Intel® 802.11a/b/g/n/ac (2x2) Wi-Fi® and Bluetooth® 4.2 Combo<sup>1</sup></b>	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
	<b>Interoperability</b>	Wi-Fi® certified
	<b>Frequency Band</b>	802.11b/g/n <ul style="list-style-type: none"> <li>• 2.402 – 2.482 GHz</li> </ul> 802.11a/n <ul style="list-style-type: none"> <li>• 4.9 – 4.95 GHz (Japan)</li> <li>• 5.15 – 5.25 GHz</li> <li>• 5.25 – 5.35 GHz</li> <li>• 5.47 – 5.725 GHz</li> <li>• 5.825 – 5.850 GHz</li> </ul>
	<b>Data Rates</b>	<ul style="list-style-type: none"> <li>• 802.11b: 1, 2, 5.5, 11 Mbps</li> <li>• 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>• 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>• 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</li> </ul>
	<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
	<b>Security<sup>3</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and Wi-Fi® compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul>
	<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
	<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• 802.11b : +14dBm minimum</li> <li>• 802.11g : +12dBm minimum</li> <li>• 802.11a : +12dBm minimum</li> <li>• 802.11n HT20(2.4GHz) : +12dBm minimum</li> <li>• 802.11n HT40(2.4GHz) : +12dBm minimum</li> <li>• 802.11n HT20(5GHz) : +10dBm minimum</li> <li>• 802.11n HT40(5GHz) : +10dBm minimum</li> <li>• 802.11ac VHT80(5GHz) : +10dBm minimum</li> </ul>
	<b>Power Consumption</b>	<ul style="list-style-type: none"> <li>• Transmit mode 2.0 W</li> <li>• Receive mode 1.6 W</li> </ul>

### Technical Specifications

	<ul style="list-style-type: none"> <li>• Idle mode (PSP) 180 mW (WLAN Associated)</li> <li>• Idle mode 50 mW (WLAN unassociated)</li> <li>• Connected Standby 10mW</li> <li>• Radio disabled 8 mW</li> </ul>
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>4</sup></b>	802.11b, 1Mbps : -93.5dBm maximum 802.11b, 11Mbps : -84dBm maximum 802.11a/g, 6Mbps : -86dBm maximum 802.11a/g, 54Mbps : -72dBm maximum 802.11n, MCS07 : -67dBm maximum 802.11n, MCS15 : -64dBm maximum 802.11ac, MCS0 : -84dBm maximum 802.11ac, MCS9 : -59dBm maximum
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure
	Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	<b>Operating</b> 14° to 158° F (-10° to 70° C) <b>Non-operating</b> -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	<b>Operating</b> 10% to 90% (non-condensing) <b>Non-operating</b> 5% to 95% (non-condensing)
<b>Altitude</b>	<b>Operating</b> 0 to 10,000 ft (3,048 m) <b>Non-operating</b> 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	<b>LED Amber</b> – Radio OFF; <b>LED White</b> – Radio ON

#### HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

<b>Bluetooth Specification</b>	4.0/4.1/4.2 Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
<b>Data Rates and Throughput</b>	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)

### Technical Specifications

<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW
<b>Electrical Interface</b>	USB 2.0 compliant
<b>Bluetooth Software Supported</b>	Microsoft Windows Bluetooth Software
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support
<b>Certifications</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249
<b>Power Management Certifications</b>	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
<b>Bluetooth Profiles Supported</b>	BT4.1-ESR 5/6/7 Compliance LE Link Layer Ping LE Dual Mode LE Link Layer LE Low Duty Cycle Directed Advertising LE L2CAP Connection Oriented Channels Train Nudging & Interlaced Scan BT4.2 ESR08 Compliance LE Secure Connection- Basic/Full LE Privacy 1.2 –Link Layer Privacy LE Privacy 1.2 –Extended Scanner Filter Policies LE Data Packet Length Extension FAX Profile (FAX) Basic Imaging Profile (BIP)2 Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

1. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices
2. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
3. Check latest software/driver release for updates on supported security features.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

### Technical Specifications

<b>HP It4132 LTE/HSPA+ 4G- Mobile Broadband Module (Macan)<sup>1</sup></b>	<b>Technology/Operating bands</b>	LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3) MHz, 850 (Band 5), 2600 (Band 7), 900 (Band 8) MHz, 800 (Band 20), 700 (Band 28) MHz. HSPA+: 2100 (Band 1), 1900 (Band 2), 850 (Band 5), 900 (Band 8) MHz E-GPRS: 1900 (Band 2), 1800 (Band 3), 850 (Band 5), 900 (Band 8) MHz
	<b>Wireless protocol standards</b>	3GPP Release 10 LTE Specification CAT.4, 20MHz BW WCDMA R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification E-GPRS: Class B, Multi-slot class 12, coding schemes CS1 - CS4 and MSC1 - MSC9
	<b>GPS</b>	Standalone, A-GPS (MS-B and LTO)
	<b>GPS bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
	<b>Maximum data rates</b>	LTE: 150 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
	<b>Maximum output power</b>	LTE: 23 dBm HSPA+: 23.5 dBm E-GPRS 1900/1800: 26 dBm E-GPRS 900/850: 27 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm
	<b>Maximum power consumption</b>	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) E-GPRS: 2,600 mA (peak); 500 mA (average)
	<b>Form Factor</b>	M.2, 3042-S3 Key B
	<b>Weight</b>	6 g
	<b>Dimensions (Length x Width x Thickness)</b>	42 x 30 x 2.3 mm

1. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices

### Technical Specifications

<b>Realtek 802.11b/g/n (2x2) Wi-Fi® and Bluetooth® 4.2 Combo<sup>1</sup></b>	<b>Wireless LAN Standards</b>	IEEE 802.11b IEEE 802.11g IEEE 802.11n
	<b>Interoperability</b>	Wi-Fi® certified
	<b>Frequency Band</b>	802.11b/g/n <sup>7</sup> • 2.402 – 2.482 GHz
	<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 07, (20MHz)
	<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM,
	<b>Security<sup>3</sup></b>	<ul style="list-style-type: none"> <li>• IEEE and Wi-Fi® compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>• AES-CCMP: 128 bit in hardware</li> <li>• 802.1x authentication</li> <li>• WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>• WPA2 certification</li> <li>• IEEE 802.11i</li> <li>• Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>• WAPI</li> </ul>
	<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) GPRS 900/850: 32.5 dBm
	<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
	<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• 802.11b : +16dBm minimum</li> <li>• 802.11g : +14dBm minimum</li> <li>• 802.11a : +14dBm minimum</li> <li>• 802.11n HT20(2.4GHz) : +13dBm minimum</li> <li>• 802.11n HT40(2.4GHz) : +13dBm minimum</li> <li>• 802.11n HT20(5GHz) : +12dBm minimum</li> <li>• 802.11n HT40(5GHz) : +12dBm minimum</li> </ul>
	<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW
	<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
	<b>Receiver Sensitivity<sup>4</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum
	<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure

### Technical Specifications

	Two embedded 2.4 GHz antennas are provided to the card to support WLAN and Bluetooth communications (Support Dual antenna or Single antenna, depend on platform requirement)
<b>Form Factor</b>	PCI-Express M.2 MiniCard
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g
<b>Operating Voltage</b>	3.3v +/- 9%
<b>Temperature</b>	Operating: 14° to 158° F (–10° to 70° C) Non-operating: –40° to 176° F (–40° to 80° C)
<b>Humidity</b>	<b>Operating:</b> 10% to 90% (non-condensing) <b>Non-operating:</b> 5% to 95% (non-condensing)
<b>Altitude</b>	<b>Operating:</b> 0 to 10,000 ft (3,048 m) <b>Non-operating:</b> 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	<b>LED Amber</b> – Radio OFF <b>LED White</b> – Radio ON

#### HP Integrated Module with Bluetooth 4.0/4.1/4.2 Wireless Technology

<b>Bluetooth Specification</b>	4.0/4.1/4.2 Compliant
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)
<b>Data Rates and Throughput</b>	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)
<b>Transmit Power</b>	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of + 4 dBm for BR and EDR.

1. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices
2. The FCC has declared as of September 1, 2014 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
3. Check latest software/driver release for updates on supported security features.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

### Technical Specifications

<b>HP It4210 LTE/HSPA+ 4G Mobile Broadband Module (Pandora)<sup>1</sup></b>	<b>Technology/Operating bands</b>	LTE: 2100 (Band 1), 1900 (Band 2), 1800 (Band 3), 1700/2100 (Band 4), 850 (Band 5), 2600 (Band 7), 900 (Band 8), 700 (Band 12 lower), 700 (Band 13 upper), 700 (Band 17 lower), 800 (Band 20), 700 (Band 28). HSPA+: 2100 (Band 1), 1900 (Band 2), 1700/2100 (Band 4), 850 (Band 5), 900 (Band 8) MHz
	<b>Wireless protocol standards</b>	3GPP Release 10 LTE Specification CAT.4, 20MHz BW WCDMA R99, 3GPP Release 5, 6, 7 and 8 UMTS Specification 1xEVDO Release 0, A and B. E-GPRS: Class B, Multi-slot class 12, coding schemes CS1 - CS4 and MSC1 - MSC9
	<b>GPS</b>	Standalone, A-GPS (MS-A, MS-B and XTRA)
	<b>GPS bands</b>	1575.42 MHz ± 1.023 MHz, GLONASS 1596-1607MHz
	<b>Maximum data rates</b>	LTE: 150 Mbps (Download), 50 Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21Mbps (Download), 5.76 Mbps (Upload) CDMA 1xRTT: 153.6 kbps (Download), 153.6 kbps (Upload) EVDO Rel.A: 3.1 Mbps (Download), 1.8 Mbps (Upload) EVDO Rel.B: 14.7 Mbps (Download), 5.4Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
	<b>Maximum output power</b>	LTE: 23 dBm HSPA+: 23.5 dBm 1xRTT/EVDO: 24dBm E-GPRS 1900/1800: 26 dBm E-GPRS 900/850: 27 dBm GPRS 1900/1800: 29.5 dBm GPRS 900/850: 32.5 dBm
	<b>Maximum power consumption</b>	LTE: 1,200 mA (peak); 900 mA (average) HSPA+: 1,100 mA (peak); 800 mA (average) 1xRTT/EVDO: 1,000 mA (peak); 700 mA (average) E-GPRS: 2,800 mA (peak); 500 mA (average)
	<b>Form Factor</b>	M.2, 3042-S3 Key B
	<b>Weight</b>	6.2 g
	<b>Dimensions (Length x Width x Thickness)</b>	42 x 30 x 2.3 mm

1. Wireless access point and Internet service is required. Availability of public wireless access point is limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices

### Technical Specifications

#### Near Field Communications Controller (optional)

<b>Dimensions (L x W x H)</b>	Module 25 mm by 10 mm by 2.0 mm
<b>Chipset</b>	NPC100
<b>System interface</b>	I2C
<b>NFC RF standards</b>	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 ISO/IEC 18092 ECMA-340 NFCIP-1 Target and Initiator ECMA-320 NFCIP-2
<b>NFC Forum Support</b>	Tag Type 1, Type 2, Type3 and Type 4, NFCIP-1 and NFCIP-2
<b>Reader (PCD-VCD) Mode(1)</b>	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 MIFARE 1K MIFARE 4K MIFARE DESFire FeliCa Jewel and Topaz cards
<b>Card Emulation (PICC-VICC) Mode(1)</b>	ISO/IEC 14443 A ISO/IEC 14443 B and B' MIFARE FeliCa
<b>Frequency</b>	13.56 MHz
<b>NFC Modes Supported</b>	Reader/Writer, Peer-to-Peer
<b>Raw RF Data Rates</b>	106, 212, 424, 848 kbps
<b>Operating temperature</b>	0°C to 70°C
<b>Storage temperature</b>	-20°C to 125°C
<b>Humidity</b>	10-90% operating 5-95% non-operating
<b>Supply Operating voltage</b>	2.97 to 5.5 Volts
<b>I/O Voltage</b>	1.8V or 3.3V

#### Power Consumption (Booster enable, VBAT= 3.3V, VCC\_BOOST = 5V)

<b>Mode</b>	Power Consumption, Typical
<b>Polling</b>	7.3 mA
<b>Detected Test Tag Type 1</b>	Total 283.8 mA Net Module 236.8 mA
<b>Detected Test Tag Type 2</b>	Total 288.8 mA Net Module 241.8 mA
<b>Detected Test Tag Type 3</b>	Total 287.7 mA Net Module 240.7 mA
<b>Detected Test Tag Type 4</b>	Total 282.3 mA Net Module 235.3 mA



### Technical Specifications

<b>Antenna</b>	Antenna connector, 0.5mm pitch, 7 connector FPC. Antenna matching is external to module.
----------------	--

#### RFID Controller (optional)

<b>Dimensions (L x W x H)</b>	Module 50 mm by 23 mm by 2.89 mm
<b>Chipset</b>	SIM3U156+SIM3U154+AMS3911
<b>System interface</b>	USB 2.0
<b>NFC RF standards (In reading CSN)</b>	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 ISO/IEC 18092 ECMA-340 NFCIP-1
<b>NFC Forum Support</b>	Tag Type 1, Type 2, Type3 and Type 4 in reading CSN
<b>Reader Mode</b>	13.56MHz: ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 MIFARE 1K MIFARE 4K MIFARE DESFire FeliCa Topaz cards HID iClass ISO 125kHz: HID Prox UID AWID UID CASI-RUSCO UID EM 410x UID Indiana ASP/ASP+ UID
<b>Frequency</b>	13.56MHz and 125kHz
<b>NFC Modes Supported</b>	Reader
<b>Raw RF Data Rates</b>	106, 212 kbps
<b>Operating temperature</b>	-30°C to 70°C
<b>Storage temperature</b>	-40°C to 80°C
<b>Humidity</b>	10-90% operating 5-95% non-operating
<b>Supply Operating voltage</b>	4.35 to 5.25 Volts

### Technical Specifications

<b>Power</b>		
	<b>Mode</b>	Power Consumption, Typical
	<b>Polling</b>	75mA
	<b>Communication</b>	85mA
	<b>Antenna</b>	13.56MHz/125kHz combo antenna. Antenna connector, 0.5mm pitch, 16pin connector FPC.

### POWER

<b>AC Adapter 65 Watt nPFC USB type C</b>	<b>Dimensions</b>	74x74x28.5mm		
	<b>Weight</b>	unit: 245g +/- 10g		
<b>Input</b>	<b>Input Efficiency</b>	81.5% min at 115 Vac/ 230Vac @ 5V/3A		
		86.7% min at 115 Vac/ 230Vac @ 9V/3A		
		88% min at 115 Vac/ 230Vac @ 10V/5A		
		88% min at 115 Vac/ 230Vac @ 12V/5A		
		89% min at 115 Vac/ 230Vac @ 15V/4.33A		
		89% min at 115 Vac/ 230Vac @ 20V/3.25A		
		<b>Input frequency range</b>	47 ~ 63 Hz	
		<b>Input AC current</b>	1.7 A at 90 VAC and maximum load	
		<b>Output</b>	<b>Output power</b>	65W
			<b>DC output</b>	5V/9V/10V/12V/15V/20V
<b>Hold-up time</b>	5ms at 115 Vac input			
<b>Output current limit</b>	<8.0A			
<b>Connector</b>	Duck head / duck head power cord, without Smart ID DC connector			
<b>Environmental Design</b>	<b>Operating temperature</b>	32°F to 95°F (0° to 35°C)		
	<b>Non-operating (storage) temperature</b>	-4°F to 185°F (-20° to 85°C)		
	<b>Altitude</b>	0 to 16,400 ft (0 to 5000m)		
	<b>Humidity</b>	5% to 95%		
	<b>Storage Humidity</b>	5% to 95%		
<b>EMI and Safety Certifications</b>	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 100,000 hours at 25°C ambient condition.			

### Technical Specifications

<b>HP 65W Smart AC adapter</b>	<b>Dimensions</b>	107.0x47.0x30.0mm	
	<b>Weight</b>	unit: 250g +/- 10g	
	<b>Input</b>	<b>Input Efficiency</b>	88.0 % at 115 Vac and 89.0 % at 230Vac
		<b>Input frequency range</b>	47 ~ 63 Hz
	<b>Output</b>	<b>Input AC current</b>	Max. 1.7 A at 90 Vac
		<b>Output power</b>	65W
		<b>DC output</b>	19.5V
		<b>Hold-up time</b>	5ms at 115 Vac input
		<b>Output current limit</b>	<11.0A
	<b>Connector</b>	4.5mm Barrel Type	
	<b>Environmental Design</b>	<b>Operating temperature</b>	32°F to 95°F (0° to 35°C)
		<b>Non-operating (storage) temperature</b>	-4°F to 185°F (-20° to 85°C)
		<b>Altitude</b>	0 to 16,400 ft (0 to 5000m)
		<b>Humidity</b>	20% to 95%
<b>Storage Humidity</b>		10% to 95%	
<b>Safety Certifications</b>	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 200,000 hours at 25°C ambient condition.		
<b>HP 65W EM Smart AC adapter</b>	<b>Dimensions</b>	102x55x30mm	
	<b>Weight</b>	270g +/- 10g	
	<b>Input</b>	<b>Input Efficiency</b>	87% min at 115V/230V
		<b>Input frequency range</b>	47 to 63 Hz
	<b>Output</b>	<b>Input AC current</b>	1.7 A at 90 VAC and maximum load
		<b>DC output</b>	65W(19.5V/3.33A)
		<b>Hold-up time</b>	5 msec at 115 VAC input
		<b>Output current limit</b>	<11A, Over voltage protection- 29V max automatic shutdown
		<b>Connector</b>	4.5mm Barrel Type, 3 pin/grounded, mates with interchangeable cords
	<b>Environmental Design</b>	<b>Operating temperature</b>	0° to 35° C
		<b>Non-operating (storage) temperature</b>	-20° to 85° C
		<b>Altitude</b>	0 to 5,000 m
		<b>Humidity</b>	0% to 95%
		<b>Storage Humidity</b>	0% to 95%
<b>Safety Certifications</b>	CE Mark - full compliance with LVD and EMC directives Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. MTBF - over 200,000 hours at 25°C ambient condition.		

### Technical Specifications

<b>Battery SS 3 Cell 50 WHr Long Life -PL</b>	<b>Dimensions (H x W x L)</b>	L 278.7mm x W 76.3mm x H 7.1mm	
	<b>Weight</b>	193 +/- 10g	
	<b>Cells/Type</b>	3cell Lithium-Ion Polymer cell / P604883A1	
	<b>Energy</b>	<b>Voltage</b>	11.55V/
		<b>Amp-hour capacity</b>	4.113Ah/ 4.330Ah
		<b>Watt-hour capacity</b>	50Wh
	<b>Temperature</b>	<b>Operating (Charging)</b>	0° to 50° C
		<b>Operating (Discharging)</b>	-10° to 60° C
	<b>Fuel Gauge LED</b>	N/A	
	<b>Warranty</b>	3 years	
<b>Optional Travel Battery Available</b>	No		

### COUNTRY OF ORIGIN

China

### Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
<b>Cases</b>	HP Business Case	Z5C66AA
	HP Slim Top Load	F3W15AA
	HP Exec Midnight 15.6" Backpack	1KM16AA
<b>Docking</b>	HP Thunderbolt Dock 120W G2	2UK37AA
	HP USB-C Universal Dock	1MK33AA
	HP USB-C Dock G4	3FF69AA
	HP USB-C Mini Dock	1PM64AA
	HP UltraSlim Docking Station	D9Y32AA
<b>Input/Output</b>	HP Slim Wireless Keyboard and Mouse	T6L04AA
	HP Slim USB Keyboard and Mouse	T6T83AA
	HP Wireless (Link-5) Keyboard	T6U20AA
	HP Wireless Premium Mouse	1JR31AA
	HP USB Premium Mouse	1JR32AA
	HP USB 3-Button USB Laser Mouse	H4B81AA
	HP Comfort Grip Wireless Mouse	H2L63AA
	HP Slim Bluetooth Mouse	F3J92AA
	HP Elite Presenter Mouse	2CE30AA
	HP USB-C to USB-A Hub	Z6A00AA
	HP USB-C to DP	N9K78AA
	HP USB-C to VGA	N9K76AA
	HP HDMI to DVI	F5A28AA
	HP HDMI to VGA	H4F02AA
	HP Stereo 3.5mm Headset	T1A66AA
HP Stereo USB Headset	T1A67AA	
<b>Power</b>	HP 65W Slim AC Adapter	H6Y82AA
	HP 65W Smart AC Adapter	H6Y89AA
<b>Storage</b>	HP USB External DVDRW Drive	F2B56AA
	HP 128 GB M2 TLC SATA-3 SSD (2280)	ZJB96AA
<b>Memory</b>	HP 4 GB 2400MHz DDR4 Memory	Z4Y84AA
	HP 8 GB 2400MHz DDR4 Memory	Z4Y85AA
	HP 16 GB 2400MHz DDR4 Memory	Z4Y86AA
<b>Security</b>	HP Docking Station Cable Lock	AU656AA
	HP Keyed Cable Lock	T0Y14AA
	HP Keyed Cable Lock 10mm	T1A62AA
	HP Dual Head Keyed Cable Lock	T1A64AA
	HP 14.1 Privacy Filter	V8Z57AA

### Options and Accessories (sold separately and availability may vary by country)

<b>UCC</b>	HP USB Collaboration Keyboard	Z9N38AA
	HP Wireless Collaboration Keyboard	Z9N39AA
	HP UC Wireless Mono Headset	W3K08AA
	HP UC Wireless Duo Headset	W3K09AA
	HP UC Speaker Phone	K7V16AA
<b>Displays</b>	HP HC240 24-inch Healthcare Edition Display	Z0A71A4
	HP HC270 27-inch Healthcare Edition Display	Z0A73A4
	HP HC270cr 27-inch Healthcare Edition Display	1QW03A8 (for NA)
		1QW03AA (for rest of the world)

---

### Summary of Changes

Date of change:	Version History:		Description of change:
09/04/2018	V1 to V2	Update	Processors, Cleaning instructions sections
17/04/2018	V2 to V3	Update	Cleaning Instructions
30/04/2018	V3 to V4	Update	Weight and Dimensions
08/05/2018	V4 to V5	Added	Environmental tab
18/07/2018	V5 to V6	Added	Display
23/07/2018	V6 to v7	Update	Software section

Copyright © 2018 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core and Intel vPro are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. AMD and Radeon™ is a trademark of Advanced Micro Devices, Inc. USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum. ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.